



# PRODUCT LINEUP



## Overview

### Product Full Line-up

Full Line-up of Products  
Turning Center  
Machining Center  
Double Column  
Machining Center  
Boring Machine

### CUFOS

Optimal Technology  
EZ Work  
Service

### Global Support


Network  
Overseas Supplies  
System



Providing cutting-edge technology and optimal solutions to ensure DN Solutions' customers have a bright future. Satisfying Customer needs by developing leading technology, Supporting successful businesses with quality products and customized solutions. Growing together with innovative technology for customer satisfaction the DN Solutions' way.

## Contents

- 02 Overview**
- 04 Product Full Line-up**
- 06 Full Line-up of Products**
- 08 Turning Center**
- 14 Machining Center**
- 20 Double Column Machining Center**
- 21 Boring Machine**
- 22 CUFOS**
- 23 Optimal Technology**
- 24 EZ Work**
- 25 Service**
- 26 Global Support Network  
Overseas Supplies System**

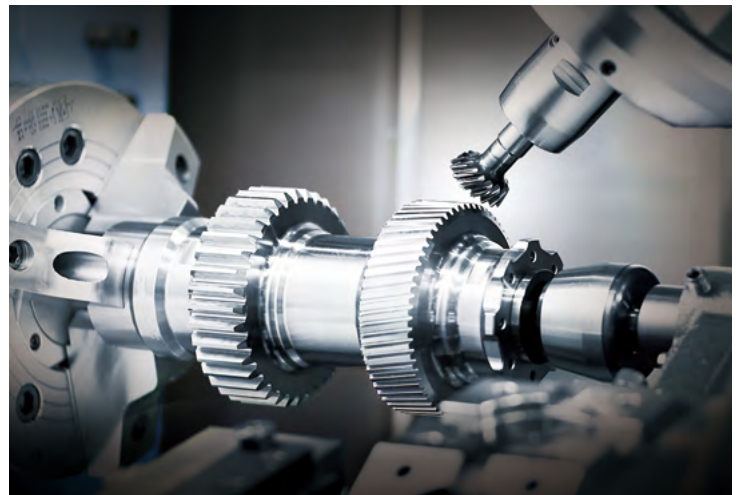

Product Full Line-up

Full Line-up of Products

Turning Center

Machining Center

Double Column

Machining Center

Boring Machine

CUFOS

Optimal Technology

EZ Work

Service

Global Support

Network

Overseas Supplies

System

# Continuous Innovation for Advanced Products & Technology


Whatever your needs are, we have the product you need. Our full line of competitive high-value machine tools delivers unmatched performance and precision.

## Full Line-up of Products

Horizontal turning centers



Multi-tasking turning centers

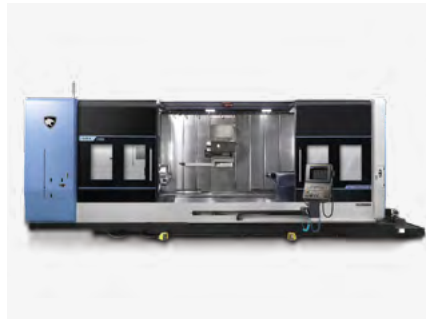

Ram type vertical turning centers



Double column machining centers




Linear Pallet System



Round Pallet System



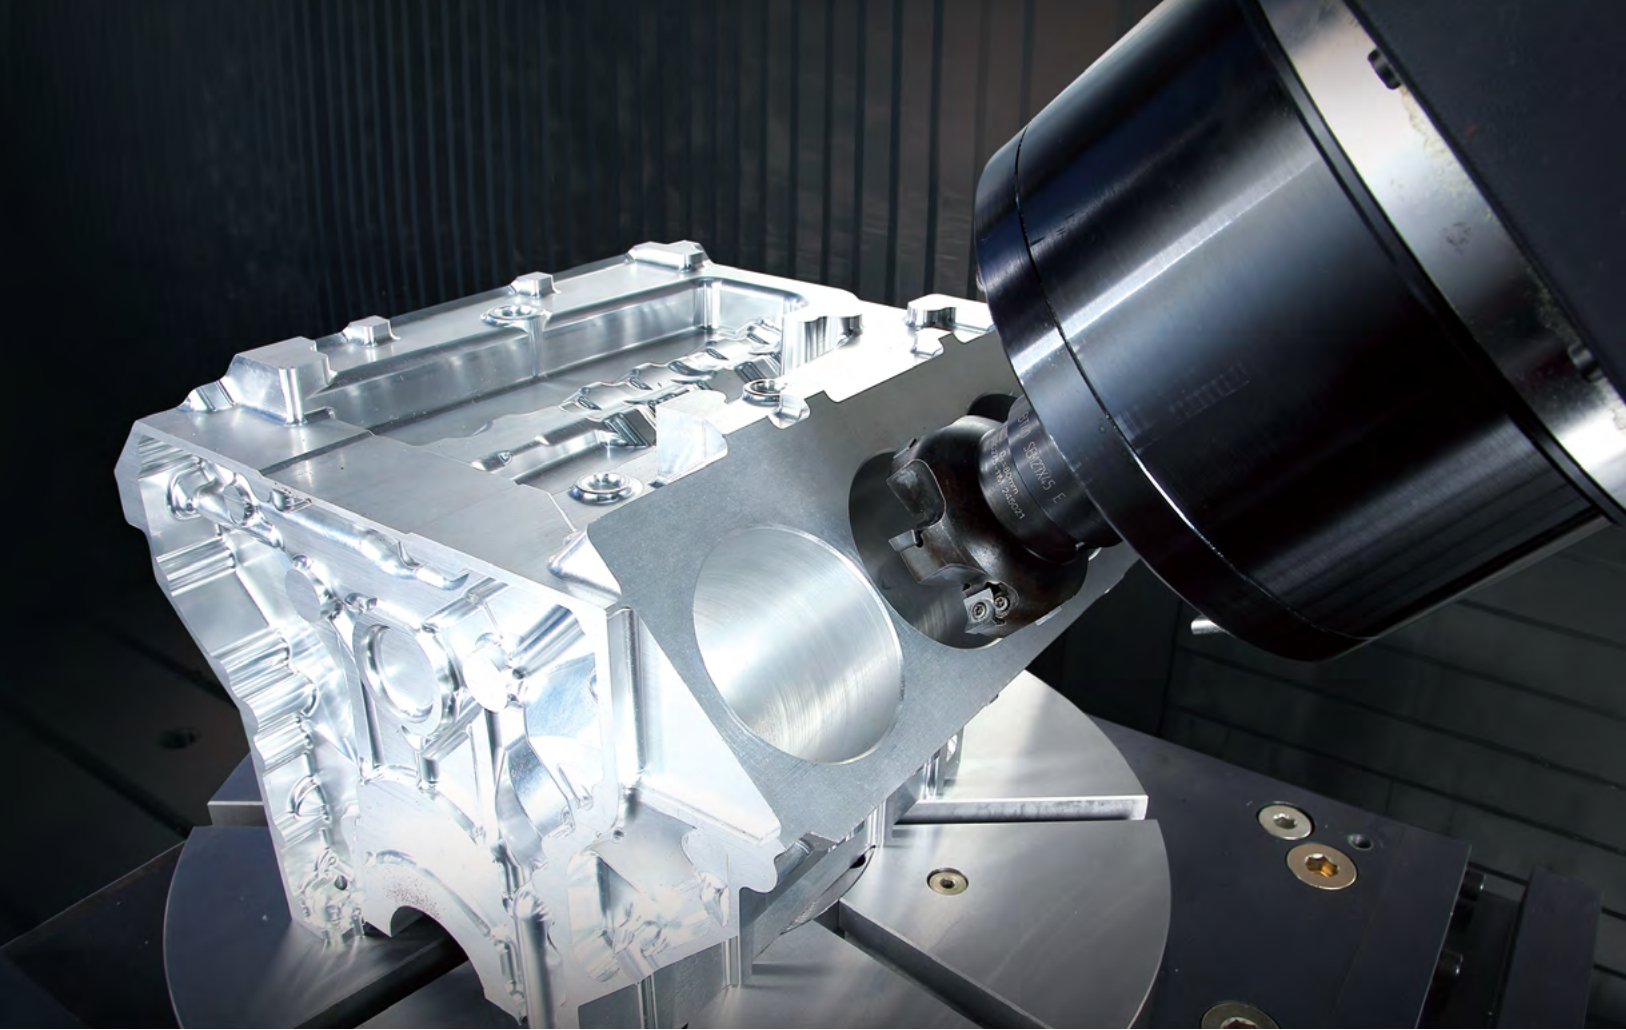

**Vertical machining centers**




**5-axis vertical machining centers**



**Die & mold vertical machining centers**



**Horizontal machining centers**



**Auto work-piece change system**



**Swiss type turning centers**



**Vertical turning centers**



**Horizontal boring mills**



Product Full Line-up

- Full Line-up of Products
- Turning Center
- Machining Center
- Double Column Machining Center
- Boring Machine

CUFOS

- Optimal Technology
- EZ Work
- Service

Global Support Network

Overseas Supplies System

Optimal solutions through advanced technologies

Through open communication with our customers and shareholders, regarding their current and future needs, our company takes pride in offering effective and flexible manufacturing solutions. In doing so, we guarantee to deliver quality products and services as an integral part of our business policy and operational priority. As we pursue autonomous management by respecting individuals' unique abilities and encourage collaboration and teamwork, we advance the development of innovation and value. This is our vision and management philosophy.

Turning Centers

Horizontal Turning Centers


Compact

LEO 1600

Lynx 2000



Lynx 2100



Lynx 2600



Lynx 210



Multi-Axis

PUMA TT1300



PUMA TT1800



PUMA TT2100



PUMA TT2500



PUMA TL2000



PUMA TL2500



Aluminum Wheel Turn

PUMA VAW 800

Twin Spindle

PUMA TW2100



PUMA TW2600



Twin Spindle with Gantry Loader

PUMA TW2100-GL




PUMA TW2600-GL




High Performance

PUMA 2100



PUMA 2600



PUMA 3100



PUMA DNT2100



PUMA DNT2600



PUMA GT2600



PUMA GT3100



PUMA 4100



PUMA 5100



PUMA 600II / 700II/ 800II



PUMA 1000



Multi-Tasking Turning Centers

SMX 2100



SMX 2600



SMX 3100



SMX 5100



Vertical Turning Centers

PUMA V400



PUMA V400P



PV 8300



PV 9300



PUMA VT1100



Ram Type

PUMA VTR1012



PUMA VTR1216



PUMA VTR1620



PUMA VTR2025



Grinding machine for quartz, ceramic materials

XG 600 / 800

Swiss Type Turning Centers

PUMA ST10GSII

PUMA ST20GSII / 26GSII

PUMA ST32GSII / 35GSII / 38GSII

- M Milling
- L Long Bed
- G Gang type
- T Lower Turret
- 2SP Twin Spindle
- F Cross rail fixed type
- Y Y-axis Milling
- S Sub Spindle (Right Spindle)
- GL Gantry Loader
- XL Extra Long Bed
- B\* Big Bore (only PUMA 800)

STD Standard model

A B C Chuck size

## Machining Centers / DCM / HBM

### Vertical Machining Centers

#### Tapping Centers

T 4000 STD L HP LHP HS  
LHS

#### Compact

DEM 4000 STD

#### High Productivity & Heavy Duty

DNM 4000 STD  
SVM 4100 STD  
SVM 5100L STD  
DNM 4500 STD S L  
DNM 5700 STD S L  
DNM 6700 STD L XL  
DNM 4500 4th  
DNM 5700 4th  
DNM 6700 4th  
DNM 650 /50 II  
DNM 750 II /50 II L II L/50 II

Mynx 5400II STD /50  
Mynx 6500II STD /50  
Mynx 7500II STD /50  
Mynx 9500 STD

#### High Speed, High Precision

BVM 5700 STD

#### Dual Pallet / 2 spindle

VC 3600  
VC 3600/30  
VC 430  
VC 510

#### 2-Spindle Vertical Machining Center for High Productivity

VC 4000D-2SP  
XC 4000D-2SP  
XC 4000DA-2SP

#### 5-axis

DVF 4000 STD  
DVF 5000 STD  
DVF 5000 2nd STD  
DVF 6500 STD T  
DVF 8000 STD T T/50  
DNM 200/5AX  
DNM 350/5AX  
VC 630/5AX  
FM 200/5AX linear  
FM 350/5AX linear

### Multi Purpose

VCF 850II SR LSR  
VCF 5500 L UL SL

#### Die & Mold

VM 5400 / 6500  
VM 560  
VM 750 STD L  
VM 960 STD L  
VM 1260

MD 6700

DVM 500II  
DVM 650II  
NX 5500II  
MP 6500

#### Special Machining

VX 6500C (Ceramic Machining)  
VX 6500G (Graphite Machining)

### Horizontal Machining Centers

#### Compact

NHC 4000  
NHC 5000

#### High Speed

NHP 4000  
NHP 5000  
NHP 5500 2nd  
NHP 6300  
NHP 8000

#### Heavy Duty

NHM 5000  
NHM 6300  
NHM 8000  
HM 1000 STD W  
HM 1250

#### 5-axis

DHF 8000 STD ST  
HFP 1540

### Bridge Type Machining Centers

BM 1530 M  
BM 2035 M U  
BM 2740 STD M U

### Five Face Double Column Machining Centers

DBM 1525s  
DBM 2030 STD U  
DBM 2040 STD U  
DBM 2540 STD U  
DBM 2550 STD U  
DBM 3050 STD U  
DBM 3060 STD  
DBM 3080 STD

DCM 2740F II STD U  
DCM 2750F II STD U  
DCM 2760F II STD U  
DCM 2780F II STD U  
DCM 3250F II STD U  
DCM 3260F II STD U  
DCM 3280F II STD U  
DCM 3780F II STD U  
DCM 37100F II STD U  
DCM 4280F STD U  
DCM 3150H

### Horizontal Boring Mills

DBC 110 S II  
DBC 130 S II L II  
DBC 160 STD

### Double Column Horizontal Boring Mills

DBD 1250  
DBD 1270  
DBD 1280

## Turning Center

### Product Full Line-up

- Full Line-up of Products
- Turning Center
- Machining Center
- Double Column Machining Center
- Boring Machine

### CUFOS

- Optimal Technology
- EZ Work
- Service

### Global Support

- Network
- Overseas Supplies
- System

Global Compact Turning Center / High Performance Horizontal Turning Center /  
Global Standard Turning Center / Medium to Large Turning Center

## LEO 1600 Lynx 2000/2100/2600, Lynx 210

6, 8, 10 inch Global Compact Turning Center



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor* kW (Hp)
LEO 1600	6	320 (12.6)	303 (11.9)	4000	7.5 / 5.5 / 5.5 (10.1 / 7.4 / 7.4)**
Lynx 2000G	6/8	170 (6.7)	330 (13.0)	6000	15/15/11 (20.1 / 20.1 / 14.8)
Lynx 2100A / LA	6	350 (13.8)	330 / 550 (13.0 / 21.7)	6000	15/15/11 (20.1 / 20.1 / 14.8)
Lynx 2100B / LB	8	350 (13.8)	330 / 550 (13.0 / 21.7)	4500	15/15/11 (20.1 / 20.1 / 14.8)
Lynx 2100LC	10	350 (13.8)	537 (21.1)	3500	18.5/18.5/15 (24.8 / 24.8 / 20.1)
Lynx 2100MA / LMA	6	300 (11.8)	290 / 510 (11.4 / 20.1)	6000	15/15/11 (20.1 / 20.1 / 14.8)
Lynx 2100MB / LMB	8	300 (11.8)	290 / 510 (11.4 / 20.1)	4500	15/15/11 (20.1 / 20.1 / 14.8)
Lynx 2100LMC/LMSC	10	300 (11.8)	497 (19.6)	3500	18.5/18.5/15 (24.8 / 24.8 / 20.1)
Lynx 2100LMSA	6	300 (11.8)	510 (20.1)	6000	15/11/11 (20.1 / 14.8 / 14.8)
Lynx 2100LMSB	8	300 (11.8)	510 (20.1)	4500	15/11/11 (20.1 / 14.8 / 14.8)
Lynx 2100LYA / LYB	6/8	300 (11.8)	510 (20.1)	6000 / 4500	15/11/11 (20.1 / 14.8 / 14.8)
Lynx 2100LSYA/LSYB	6	300 (11.8)	510 (20.1)	6000 / 4500	15/11/11 (20.1 / 14.8 / 14.8)
Lynx 2600	10	460 (18.1)	610 (24.0)	3500	18.5 / 15 (24.8 / 20.1)
Lynx 2600M	10	380 (15.0)	658 (25.9)	3500	18.5 / 15 (24.8 / 20.1)
Lynx 2600Y	10	380 (15.0)	610 (24.0)	3500	18.5 / 15 (24.8 / 20.1)
Lynx 2600SY	10	380 (15.0)	610 (24.0)	3500	18.5 / 15 (24.8 / 20.1)
Lynx 210A / B	6 / 8	280 (11.0)	280 / 300 (11.0 / 11.8)	6000 / 5000	15/15/11 (20.1 / 20.1 / 14.8)

L : Long bed M : Milling S : Sub spindle \* S3 25%/15min/Cont. \*\*S3 25%/Cont.

## PUMA 2100 / 2600 / 3100

High Performance Horizontal Turning Center



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor* kW (Hp)
PUMA 2100MS [ LMS ]	8	406 (16.0)	520 [ 760 ] (20.5 [ 29.9 ])	4500	18.5/15 (24.8/20.1)
PUMA 2100YI / LYI	8	406 (16.0)	520 / 760 (20.5 / 29.9)	5000	22/11 (29.5/14.8)**
PUMA 2100SYII / LSYII	8	406 (16.0)	520 / 760 (20.5 / 29.9)	5000	22/11 (29.5/14.8)**
PUMA 2600MS [ LM / LMS ]	10	376 (14.8)	760 [ 1280 ] (29.9 [ 50.4 ])	3500	22/18.5 (29.5/24.8)
PUMA 2600B / SB [ LB ]	12	481 (18.9)	755 [ 1275 ] (29.7 [ 50.2 ])	2800	22/18.5 (29.5/24.8)
PUMA 2600MB / MSB [ LMB ]	12	376 (14.8)	725 [ 1245*** ] (28.5 [ 49.0 ])	2800	22/18.5 (29.5/24.8)
PUMA 2600YI / LYI	10	376 (14.8)	760 / 1280 (29.9 / 50.4)	4000	22/15 (29.5/20.1)
PUMA 2600SYII / LSYII	10	376 (14.8)	760 / 1280 (29.9 / 50.4)	4000	22/15 (29.5/20.1)
PUMA 2600YBII / SYBII [LYBII / LSYBII]	12	376 (14.8)	725 [ 1245 ] (28.5 [ 49.0 ])	2800	22/18.5 (29.5/24.8)
PUMA 3100 / L	12	525 (20.7)	790 / 1310 (31.1 / 51.6)	2800	22/18.5 (29.5/24.8)
PUMA 3100XL / UL	12	525 (20.7)	2150 / 3150 (84.7 / 124.0)	2800	22/18.5 (29.5/24.8)
PUMA 3100M / Y [ LM / LY ]	12	420 (16.5)	765 / 1285 (30.1 / 50.6)	2800	22/18.5 (29.5/24.8)
PUMA 3100SY / LSY	12	420 (16.5)	765 / 1285 (30.1 / 50.6)	2800	26/18.5 (34.9/24.8) {3000} {30/25 (40.2/33.5)}
PUMA 3100XLM / XLY [ ULM / ULY ] XLYB / ULYB	12	420 (16.5)	2125 / 3125 (83.7 / 123.0)	2800	22/18.5 (29.5/24.8)

L : Long bed XL : Xtra long bed UL : Ultra long bed M : Milling S : Sub spindle Y : Y-axis milling \* 30min/Cont.



## PUMA DNT2100 / 2600

## PUMA GT2600 / 3100

8, 10, 12 inch Global Standard Turning Center



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor * kW (Hp)
PUMA DNT2100/M	8{10}	400/320 (15.7/12.6)	562/513 (22.1/20.2)	4500	18.5/15/15(24.8/20.1/20.1)
PUMA DNT2100B/MB	10	400/320 (15.7/12.6)	550/501 (21.7/19.7)	3500	18.5/15/15(24.8/20.1/20.1)
PUMA DNT2600/L	10{12}	460 (18.1)	658 (25.9)	3500	26/22/18.5(34.9/29.5/24.8)
PUMA DNT2600M/LM	10{12}	380 (15.0)	610 (24)	3500	26/22/18.5(34.9/29.5/24.8)
PUMA GT2600XL/XLMA	10	460/410 (18.1/16.1)	1603/1555 (63.1/61.2)	3500	26/22/18.5**(34.9/29.5/24.8)
PUMA GT2600XLB/XLMB	12	460/410 (18.1/16.1)	1573/1525 (61.9/60.0)	2500	26/22/18.5**(34.9/29.5/24.8)
PUMA GT3100A / LA	10	481 (18.9)	790 / 1310 (31.1/51.6)	3500	35/26/22****(47.0/34.9/29.5)
PUMA GT3100MA / LMA	10	376 (14.8)	760 / 1280 (29.9/50.4)	3500	22/18.5***** (29.5/24.8)
PUMA GT3100 / L	12	481 (18.9)	755 / 1275 (29.7 / 50.2)	2800	35/26/22*** (47.0/34.9/29.5)
PUMA GT3100M / LM	12	376 (14.8)	725 / 1245 (28.5 / 49.0)	2800	22/18.5** (29.5/24.8)

\* 15min/Cont \*\* 30min/Cont. \*\*\* S3 25%/30min/Cont. \*\*\*\*S3 25%/S3 60%/Cont. \*\*\*\*\*S3 60%/Cont.

## PUMA 4100

Medium to Large Turning Center with 2-axis to Milling Machining Capability



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor * kW (Hp)
PUMA 4100A / LA / XLA	12	550 (21.7)	1074 / 2124 / 3152 (42.3 / 83.6 / 124.1)	3000	35/26/22** (47.0/34.9/29.5)
PUMA 4100B / LB / XLB	15	550 (21.7)	1042 / 2092 / 3120 (41.0 / 82.4 / 122.8)	2000	35/26/22** (47.0/34.9/29.5)
PUMA 4100C / LC / XLC	21	550 (21.7)	1002 / 2052 / 3080 (39.4 / 80.8 / 121.3)	1500	37/30 (49.7/40.3)
PUMA 4100MA / LMA / XLMA	12	550 (21.7)	1010 / 2060 / 3100 (39.8 / 81.1 / 122.0)	3000	30/22 (40.3/29.5)
PUMA 4100MB / LMB / XLMB	15	550 (21.7)	978 / 2028 / 3068 (38.5 / 79.8 / 120.8)	2000	30/22 (40.3/29.5)
PUMA 4100MC / LMC / XLMC	21	550 (21.7)	938 / 1988 / 3028 (36.9 / 78.3 / 119.2)	1500	37/30 (49.7/40.3)

L : Long bed M : Milling \* 30min/Cont. \*\* S3 25%/30min/Cont.

## PUMA 5100

Medium to Large Turning Center with 2-axis to Y-axis Machining Capability



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor * kW (Hp)
PUMA 5100A / LA / XLA	15	650 (25.6)	1032 / 2082 / 3082 (40.6 / 82.0 / 121.3)	2000	37/30 (49.7/40.3)
PUMA 5100B / LB / XLB	21	650 (25.6)	992 / 2042 / 3042 (39.1 / 80.4 / 119.8)	1500	45/37 (60.4/49.7)
PUMA 5100C / LC / XLC	-	650 (25.6)	992 / 2042 / 3042 (39.1 / 80.4 / 119.8)	1000	45/37 (60.4/49.7)
PUMA 5100MA / LMA / XLMA	15	650 (25.6)	992 / 2042 / 3068 (39.1 / 80.4 / 120.8)	2000	37/30 (49.7/40.3)
PUMA 5100MB / LMB / XLMB	21	650 (25.6)	952 / 2042 / 3028 (37.5 / 80.4 / 119.2)	1500	45/37 (60.4/49.7)
PUMA 5100LYA / XLYA	15	550 (21.7)	2050 / 3070 (80.7 / 120.9)	2000	37/30 (49.7/40.3)
PUMA 5100LYB / XLYB	21	550 (21.7)	2020 / 3040 (79.5 / 119.7)	1500	45/37 (60.4/49.7)
PUMA 5100LYC	-	550 (21.7)	2020 (79.5)	1000	45/37 (60.4/49.7)

L : Long bed M : Milling Y : Y axis Milling \* 30min/Cont.

Product Full Line-up

- Full Line-up of Products
- Turning Center
- Machining Center
- Double Column Machining Center
- Boring Machine

- CUFOS
- Optimal Technology
- EZ Work
- Service

- Global Support Network
- Overseas Supplies System

## Turning Center

Large Horizontal Turning Center / Horizontal Multi turret Turning Center / Aluminum Wheel Turns  
Twin Spindle Turning Center / Twin Spindle Turning Center with Gantry Loader

### PUMA 600II / 700II / 800II

Large Horizontal Turning Center with 2-axis to Y-axis Machining Capability



Machine	Chuck mm (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor * kW (Hp)
PUMA 600 / M	18	900 (35.4)	1600 (63.0)	1800	55/45/37 (73.8 /60.4/49.7)
PUMA 600L / LM	18	900 (35.4)	3200 (126.0)	1800	55/45/37 (73.8 /60.4/49.7)
PUMA 600XL / XLM	18	900 (35.4)	5050 (198.8)	1800	55/45/37 (73.8 /60.4/49.7)
PUMA 700 / M	24	900 (35.4)	1600 (63.0)	1500	55/45/37 (73.8 /60.4/49.7)
PUMA 700L / LM	24	900 (35.4)	3200 (126.0)	1500	55/45/37 (73.8 /60.4/49.7)
PUMA 700XL / XLM	24	900 (35.4)	5050 (198.8)	1500	55/45/37 (73.8 /60.4/49.7)
PUMA 800 / M	32	900 (35.4)	1600 (63.0)	750	55/45/37 (73.8 /60.4/49.7)
PUMA 800B / LB	-	900 (35.4)	1600 (63.0)/3200 (126.0)	500	55/45/37** (73.8 /60.4/49.7)
PUMA 800L / LM	32	900 (35.4)	3200 (126.0)	750	55/45/37 (73.8 /60.4/49.7)
PUMA 800XL / XLM	32	900 (35.4)	5050 (198.8)	750	55/45/37 (73.8 /60.4/49.7)
PUMA 600LY / XLY	18	750 (29.5)	3250/5050 (128.0/198.8)	1800	55/45/37 (73.8 /60.4/49.7)
PUMA 700LY / XLY	24	750 (29.5)	3250/5050 (128.0/198.8)	1500	55/45/37 (73.8 /60.4/49.7)
PUMA 800LY / XLY	32	750 (29.5)	3250/5050 (128.0/198.8)	750	55/45/37 (73.8 /60.4/49.7)

L : Long bed XL : Xtra long bed M : Milling Y : Y-axis milling \* 30min/Cont. \*\*Big bore

### PUMA 1000

Large-sized Big bore Heavy Duty Turning Center with upto 560mm spindle bore



Machine	Chuck mm (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor * kW (Hp)
PUMA 1000A	-	1000 (39.4)	2040 (80.3)	500	75/60 (100/80)
PUMA 1000B	-	1000 (39.4)	2040 (80.3)	300	75/60 (100/80)
PUMA 1000MA	-	1000 (39.4)	2040 (80.3)	500	75/60 (100/80)
PUMA 1000MB	-	1000 (39.4)	2040 (80.3)	300	75/60 (100/80)

\* 30min/Cont.

### PUMA TT1300 / 1800 / 2100 / 2500 PUMA TL2000 / 2500

Horizontal Multi turret Turning Center



Machine	Chuck mm (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor * kW (Hp)
PUMA TT1300SYB/SYYB	(Left)6 / (Right)5	175 (6.9)	120 (4.7)	6000	15/11/7.5 <sup>1)</sup> (20.1/14.8/10.1)
PUMA TT1800SY	8	230 (9.1)	230 (9.1)	5000	22/18.5 (29.5/24.8)
PUMA TT2100SYY	8	230 (9.1)	230 (9.1)	5000	25/18.5/15 <sup>1)</sup> (33.5/24.8/20.1)
PUMA TT2100SYYB	(Left)10 / (Right)8	230 (9.1)	230 (9.1)	3500	22/18.5 <sup>2)</sup> (29.5/24.8)
PUMA TT2500SY	10	U : 390 (15.4) L : 300 (11.8)	350 (13.8)	3500	26/22 (34.9/29.5)
PUMA TL2000	8	U : 370 (14.6) L : 240 (9.4)	600 / 1000 (23.6 / 39.4)	5000	22/18.5/15** (29.5/24.8/20.1)
PUMA TL2500/L	10	U : 370 (14.6) L : 240 (9.4)	600/1000/1250 (23.6/39.4/49.2)	4000	26/22 (34.9/29.5)

M : Milling S : Sub spindle Y : Y-axis milling U : on upper turret L : on lower turret  
\* 30min/Cont. \*\* 10min/30min/Cont. 1) S3 25%/S3 60%/Cont. 2) S3 60% / Cont.

## PUMAVAW 800

Vertical Aluminum Wheel Turns



Machine	Wheel Size (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor* kW (Hp)
PUMA VAW800	28	711 (28.0)	2000	55/45** (73.8/60.4)
* S3 25%/Cont. ** S3 40% 30min/Cont.				

## PUMA TW2100/2100-GL/2600/2600-GL

Twin Spindle Turning Center



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Length mm (inch)	Spindle Speed (r/min)	Motor* kW (Hp)
PUMA TW2100 / M	8 {6}	240 (9.4)	128 (5.0)	4500 { 6000 }	15/11 (20.1/14.8)
PUMA TW2600 / M	10{8,12}	360 (14.1)	170 (6.7)	3500	18.5/15** (24.8/20.1)
PUMA TW2600B / MB	12	Ø360 (14.1)	170 (6.7)	3500	22/18.5 (29.5/24.8)
{ } : Option M : Milling * 30min/Cont. ** 15min/Cont.					

Twin Spindle Turning Center with Gantry Loader



Machine	Max. Handling dia. mm (inch)	Max. Work Weight kg (lb)	Std. Loading Time (s)
PUMA TW2100-GL / M	Ø130 x 65(5.1 x 2.6) {Ø180 x 80 (7.1 x 3.1) }	3 (6.6)	5.7
PUMA TW2600-GL / M-GL	Ø200 x 90(7.9 x 3.5) {Ø320 x 35 (12.6 x 1.4) }	6 (13.2)	7.9
PUMA TW2600B-GL / MB-GL	Ø225 (8.9)	6 (13.2)	7.9

{ } : Option

## Turning Center

Multi-Tasking Turning center / Vertical Turning Center /  
Large Vertical Turning Center with RAM Head Spindle / Swiss Type Turning Center

### PUMA 2600 / 3100, SMX 2100 / 5100

Multi-Tasking Turning center



Machine	Chuck (inch)	Max. Machining Dia. mm (inch)	Max. Machining Length mm (inch)	Spindle Speed Main / Milling (r/min)	Motor Main / Sub / Milling kW (Hp)
SMX 2100	8	600 (23.6)	1040 (40.9)	5000	22/-/22 (29.5/-/29.5)
SMX 2100S /ST	8	600 (23.6)	1040 (40.9)	5000	22/22/22 (29.5/29.5/29.5)
SMX 2100B	10	600 (23.6)	1040 (40.9)	4000	22/-/22 (29.5/-/29.5)
SMX 2100SB/STB	10	600 (23.6)	1040 (40.9)	4000	22/22/22 (29.5/29.5/29.5)
PUMA SMX 2600	10	660 (26.0)	1540 (60.6)	4000 / 12000	30/-/26 (40.2/-/34.9)
PUMA SMX 2600S/ST	10	660 (26.0)	1540 (60.6)	4000 / 12000	30/30/26 (40.2/34.9/34.9)
PUMA SMX 3100	12	660 (26.0)	1540 (60.6)	3000 / 12000	30/-/26 (40.2/-/34.9)
PUMA SMX 3100L	12	660 (26.0)	2540 (100.0)	3000 / 12000	30/-/26 (40.2/-/34.9)
PUMA SMX 3100S/ST	12	660 (26.0)	1540 (60.6)	3000* / 12000	30/30/26 (40.2/40.2/34.9)
PUMA SMX 3100LS	12	660 (26.0)	2540 (100.0)	3000* / 12000	30/30/26 (40.2/40.2/34.9)
SMX 3100B/835	12 {15}	760 (29.9)	790 (31.1)	2400/12000	30/25 (40.2/33.5) / 26/18/15 (34.9/24.1/20.1)
SMX 5100L/XL	15	830 (32.7)	3050/4070(120.1/160.2)	2400/10000	37/30/25** (49.6/40.2/33.5)
SMX 5100LB/XLB	21	830 (32.7)	3050/4070(120.1/160.2)	1500/10000	37/30/25** (49.6/40.2/33.5)
SMX 5100LS	15	830 (32.7)	3050 (120.1)	2400/10000	37/30/25** (49.6/40.2/33.5)
SMX 5100LSB	21	830 (32.7)	3050 (120.1)	1500/10000	37/30/25** (49.6/40.2/33.5)

L : Long bed S : Sub spindle T : Turret \* Sub spindle : 4000 r/min \*\*2.5min / 30min / Cont.

### PUMA V400 / V400P, PV 8300/9300

High Productivity Vertical Turning Center



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Height mm (inch)	Spindle Speed (r/min)	Motor* kW (Hp)
PUMA V400	12	496 (19.5)	461 (18.1)	3000	22/18.5 (29.5/24.8)
PUMA V400-2SP	12	496 (19.5)	461 (18.1)	3000	22/18.5 + 22/18.5 (29.5/24.8) + (29.5/24.8)
PUMA V400M	12	420 (16.5)	400 (15.7)	3000	22/18.5 (29.5/24.8)
PUMA V400P	12	496 (19.5)	461 (18.1)	3000	22/18.5 (29.5/24.8)
PUMA V8300	15	830 (32.7)	750 (29.5)	2000	37/30** (49.6/40.2)
PUMA V8300-2SP	15	830 (32.7)	750 (29.5)	2000	37/30 + 37/30** (49.6/40.2) + (49.6/40.2)
PUMA V8300M	15	830 (32.7)	750 (29.5)	2000	37/30*(49.6/40.2)
PUMA V8300M-2SP	15	830 (32.7)	750 (29.5)	2000	37/30*(49.6/40.2)
PV 9300 / 2SP	24	930 (36.6)	801 (31.5)	1800	45/37 (60.3/49.6)
PV 9300M / M-2SP	24	930 (36.6)	801 (31.5)	1800	45/37 (60.3/49.6)

M : Milling 2SP : Twin spindle \* 30min/Cont. \*\* S6 40% / Cont.

### XG 600 / 800

Grinding machine for quartz, ceramic materials



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Spindle Speed (r/min)	Motor* kW (Hp)
XG 600	12	600 (23.6)	500{2500}* (19.7{98.4})	18.5/15/11 (24.8/20.1/14.8)
XG 800	12	800 (31.5)	500{2500} (19.7{98.4})	14.1 / 6.3 (18.9 / 8.4)

{ } : Option \*S3 15% / S3 40% / Cont.

## PUMA VT1100

High Performance Vertical Turning Center



Machine	Chuck (inch)	Max. Turning Dia. mm (inch)	Max. Turning Height mm (inch)	Spindle Speed (r/min)	Motor* kW (Hp)
PUMA VT1100	32	1100 (43.4)	960 (37.8)	850	60/55/45** (80.5/73.8/60.4)
PUMA VT1100M	32	1100 (43.4)	960 (37.8)	850	60/55/45** (80.5/73.8/60.4)

M : Milling 2SP : Twin spindle \* 30min/Cont. \*\* 10min/30min/Cont.

## PUMA VTR1012F / 1216F / 1216 / 1620 / 2025

Large Vertical Turning Center with RAM Head Spindle



Machine	Max. Turning Dia. mm (inch)	Max. Turning Height mm (inch)	Spindle Speed (r/min)	Motor kW (hp)
PUMA VTR1012F	1250 (49.2)	750 (29.5)	600	45/37* (60.3/49.6)
PUMA VTR1012FC	1250 (49.2)	750 (29.5)	600	45/37* (60.3/49.6)
PUMA VTR1216F	1600 (63.0)	950 (37.4)	400	45/37* (60.3/49.6)
PUMA VTR1216FC	1600 (63.0)	855 (33.7)	400	45/37* (60.3/49.6)
PUMA VTR1216FM	1600 (63.0)	950 (37.4)	400	45/37* (60.3/49.6)
PUMA VTR1216 / M	1600 (63.0)	1250 (49.2)	400	45/37* (60.3/49.6)
PUMA VTR1620/M	2000 (78.7)	1800 (70.9)	300	45/37* (60.3/49.6)
PUMA VTR2025 / M	2500 (98.4)	1900 (74.8)	200	75/60** (100/80)

M : Milling \* S3 60%/Cont. \*\* 30min/Cont.

## PUMA ST10GS II / 20GS II / 26GS II / 32GS II / 35GS II / 38GS II

A Highly Rigid Swiss type Turning Center, Excellent for Continuous Precision Machining



Machine	Max. Machining Dia. mm (inch)	Tool Storage (ea)	Main Spindle Motor* [ Built-in ] kW (Hp)	Sub Spindle Motor** [ Built-in ]*** kW (Hp)
PUMA ST10GS II	10 (0.4)	22	3.7/2.2 (5.0/3.0)	1.1/0.55 (1.5/0.7)
PUMA ST20GS II	20 (0.8)	25	3.7/2.2 (5.0/3.0)	3.7/2.2 (5.0/3.0)
PUMA ST26GS II	26 (1.0)	22 { 27 }	5.5/2.2 (7.4/3.0)	3.7/2.2 (5.0/3.0)
PUMA ST32GS II	32 (1.3)	24	7.5/5.5 (10.1/7.4)	3.7/2.2 (5.0/3.0)
PUMA ST35GS II	35 (1.4)	22	7.5/5.5 (10.1/7.4)	3.7/2.2 (5.0/3.0)
PUMA ST38GS II	38 (1.5)	22	7.5/5.5 (10.1/7.4)	3.7/2.2 (5.0/3.0)

{ } : Option  
\* 30min/Cont. \*\* 15min/Cont. \*\*\*Belt type motor applied in the sub spindle of PUMA ST10GS model

Overview

Product Full Line-up

- Full Line-up of Products
- Turning Center
- Double Column Machining Center
- Boring Machine

- CUFOS
- Optimal Technology
- EZ Work
- Service

- Global Support Network
- Overseas Supplies System

## Machining Center

Tapping Center / Global Standard Vertical Machining Center / Heavy Duty Vertical Machining Center / Twin Table Vertical Machining Center / 2 spindle Vertical Machining Center / 5 Axis Vertical Machining Center

### T 4000

High-Speed, High-Productivity Tapping Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
T 4000	520{700} / 400 / 350 (20.5{27.6} / 15.7 / 13/8)	650 x 400 (25.6 x 15.7)	12000 {18000}	21	13 / 3.7 (17.4 / 5.0) {2.2 / 1.1(3.0 / 14.8)}
T 4000L	520{700} / 400 / 350 (20.5{27.6} / 15.7 / 13/8)	850 x 400 (33.5 x 15.7)	12000 {18000}	21	13 / 3.7 (17.4 / 5.0) {2.2 / 1.1(3.0 / 14.8)}
T 4000HP	520{700} / 400 / 350 (20.5{27.6} / 15.7 / 13/8)	650 x 400 (25.6 x 15.7)	12000	21	36 / 7.5 (48.3 / 10.1)
T 4000LHP	520{700} / 400 / 350 (20.5{27.6} / 15.7 / 13.8)	650 x 400 (25.6 x 15.7) {850 x 400 (33.5 x 15.7)}	12000	21{20/24}	36 / 7.5 (48.3 / 10.1)
T 4000HS	520{700} / 400 / 350 (20.5{27.6} / 15.7 / 13/8)	650 x 400 (25.6 x 15.7)	24000	21	5.5 / 3.7 (7.4 / 5.0)
T 4000LHS	520{700} / 400 / 350 (20.5{27.6} / 15.7 / 13/8)	850 x 400 (33.5 x 15.7)	24000	21{20/24}	11/2.2 (14.8/3.0)

{ } : Option \* 30min/Cont.

### DEM 4000

Compact Vertical Machining Centers



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle speed (r / min)	Tool Storage (ea)	Motor kW (Hp)
DEM 4000	550 / 400 / 450 (21.7 / 15.7 / 17.7)	650 x 400 (25.6 x 15.7)	8000	20	7.5/5.5 (10.1/7.4)

{ } : Option

### DNM 4000 / 4500 / 5700 / 6700

### DNM 650/50 II

### DNM 750/50 II , 750L/50 II

### SVM 4100/5100L

Global Standard Vertical Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
DNM 4000	520 / 400 / 480 (20.5 / 15.7 / 18.9)	650 x 400 (25.6 x 15.7)	12000	20	18.5(10min) / 11(Cont.)
SVM 4100	770 / 410 / 510 (30.3 / 17.7 / 20.1)	920 x 410 (36.2 x 16.1)	12000	30	18.5/5.5 (24.8/7.4)
SVM 5100L	1270 / 510 / 510 (50.0 / 20.1 / 20.1)	1320 x 510 (52.0 x 20.1)	12000	30	18.5/5.5 (24.8/7.4)
DNM 4500	800 / 450 / 510 (31.5 / 17.7 / 20.1)	1000 x 450 (39.4 x 17.7)	8000 {12000, 15000}	30 {40}	18.5/11 (24.8/14.8)
DNM 4500L	910 / 450 / 510 (35.8 / 17.7 / 20.1)	1050 x 450 (41.3 x 17.7)	8000{12000, 15000}	30	18.5/11 (24.8/14.8)
DNM 5700	1050 / 570 / 510 (41.3 / 22.4 / 20.1)	1300 x 570 (51.2 x 22.4)	8000 {12000, 15000}	30 {40}	18.5/11 (24.8/14.8)
DNM 5700L	1300 / 570 / 510 (51.2 / 22.4 / 20.1)	1500 x 570 (59.1 x 22.4)	8000{12000, 15000}	30	18.5/11 (24.8/14.8)
DNM 6700	1300 / 670 / 625 (51.2 / 26.4 / 24.6)	1500 x 670 (59.1 x 26.4)	8000 {12000, 15000}	30 {40}	18.5/15 (24.8/20.1)
DNM 6700L	1500 / 670 / 625 (59.1 / 26.4 / 24.6)	1600 x 670 (63.0 x 26.4)	8000 {12000, 15000}	30 {40}	18.5/15 (24.8/20.1)
DNM 6700XL	2100 / 670 / 625 (82.7 / 26.4 / 24.6)	2200 x 670 (86.6 x 26.4)	8000 {12000, 8000}	30(40,60)	18.5/15 (24.8/20.1)
DNM 4500S	800 / 450 / 510 (31.5 / 17.7 / 20.1)	1000 x 450 (39.4 x 17.7)	15000	30 {40}	18.5/11 (24.8/14.8)
DNM 5700S	1050 / 570 / 510 (41.3 / 22.4 / 20.1)	1300 x 570 (51.2 x 22.4)	15000	30 {40}	18.5/11 (24.8/14.8)
DNM 4500 <sup>4th</sup>	800 / 450 / 510 (31.5 / 17.7 / 20.1)	1000 x 450 (39.4 x 17.7)	8000 {8000****, 12000, 15000}	30{40} / 60 : SQ	18.5/11 {15/11} (24.8/20.1 {20.1/14.8})
DNM 5700 <sup>4th</sup>	1050 / 570 / 510 (41.3 / 22.4 / 20.1)	1300 x 570 (51.2 x 22.4)	8000 {8000****, 12000, 15000}	30{40} / 60 : SQ	18.5/11 {15/11} (24.8/20.1 {20.1/14.8})
DNM 6700 <sup>4th</sup>	1300 / 670 / 625 (51.2 / 26.4 / 24.6)	1500 x 670 (59.1 x 26.4)	8000 {8000****, 12000, 15000}	30{40} / 60 : SQ	18.5/11 {15/11} (24.8/20.1 {20.1/14.8})
DNM 750 II	1630 / 762 / 650 (54.2 / 30.0 / 25.6)	1630 x 760 (64.2 x 29.9)	8000 {12000}	30 {40, 60}	18.5/15*** (24.8/20.1)
DNM 750L II	2160 / 762 / 650 (85.0 / 30.0 / 25.6)	2160 x 760 (85.0 x 29.9)	8000 {12000}	30 {40, 60}	18.5/15*** (24.8/20.1)
DNM 750/50 II	1630 / 762 / 650 (54.2 / 30.0 / 25.6)	1630 x 760 (64.2 x 29.9)	8000 {10000}	24 {30}	18.5/7.5**** (24.8/10)
DNM 750L/50 II	2160 / 762 / 650 (85.0 / 30.0 / 25.6)	2160 x 760 (85.0 x 29.9)	8000 {10000}	24 {30}	18.5/7.5**** (24.8/10)
DNM 650/50 II	1270 / 670 / 625 (50.0 / 26.4 / 24.6)	1300 x 670 (51.2 x 26.4)	8000 {10000}	24 {30}	22/11 (29.5/14.8)

{ } : Option \* S3 15%/Cont. \*\* 15min/Cont. \*\*\* S3 60%/Cont. \*\*\*\* 5min/Cont. \*\*\*\*\* 8000 r/min High torque version(FANUC only)

## Mynx 5400 II / 6500 II / 7500 II / 9500

Heavy Duty Vertical Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
Mynx 5400 II	1020 / 550 / 530 (40.2 / 21.7 / 20.9)	1200 x 540 (47.2 x 21.3)	8000 {12000}	30 {40}	15/11 (20.1/14.8)
Mynx 5400/50 II	1020 / 550 / 530 (40.2 / 21.7 / 20.9)	1200 x 540 (47.2 x 21.3)	6000 { 8000 }	24	15/15/11** (20.1 / 20.1 / 14.8)
Mynx 6500 II	1270 / 670 / 625 (50.0 / 26.4 / 24.6)	1400 x 670 (55.1 x 26.4)	8000 { 12000 }	30 {40}	15/11 (20.1/14.8)
Mynx 6500/50 II	1270 / 670 / 625 (50.0 / 26.4 / 24.6)	1400 x 670 (55.1 x 26.4)	6000 { 8000 }	24 {30}	15/15/11** (20.1 / 20.1 / 14.8)
Mynx 7500 II	1525 / 770 / 625 (60.0 / 30.3 / 24.6)	1600 x 750 (63.0 x 29.5)	12000	30 {40}	26/22 (34.9/29.5)
Mynx 7500/50 II	1525 / 770 / 625 (60.0 / 30.3 / 24.6)	1600 x 750 (63.0 x 29.5)	6000 { 8000 }	24 {40}	18.5/15 (24.8/20.1)
Mynx 9500	2500 / 950 / 800 (98.4 / 37.4 / 31.5)	2500 x 950 (98.4 x 37.4)	6000 { 10000 }	30 {40}	30/18.5**** (40.2/24.8)

{ } : Option \* 30min/Cont. \*\* 15min/30min/Cont. \*\*\* 15min/Cont. \*\*\*\* S3 25%/Cont.

## BVM 5700

High Speed, High Precision Premium Vertical Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
BVM 5700	1050 / 570 / 460 (41.3 / 22.4 / 18.1)	1300 x 570 (51.2 x 22.4)	15000	30 {40}	37/15 (49.6/20.1)

{ } : Option

## VC 4000D-2SP, XC4000DA-2SP

High Productivity 2 spindle Machining Center



Machine	X / Y / Z / W Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
VC 4000D-2SP	630 / 400 / 360 / 10 (24.8 / 15.7 / 14.2 / 0.4)	2-800 x 535 (2-31.5 x 21.1)	12000	2 x 24	13 (17.4)
XC 4000DA-2SP	630 / 400+190 / 360 (24.8 / 15.7+7.5 / 14.2)	2-790 x 300 (2-31.1 x 11.8)	12000	2 x 24	15 (20.1)

\* S3 15%/ Cont.

## 5 axis

5 Axis Vertical Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
DVF 4000	620 / 440 / 430 (24.4 / 17.3 / 16.9)	Ø400(Ø15.7) {Ø500 x 460 (Ø19.7x18.1)}	12000 {15000}	30 {40,60}	18.5/11 (24.8/14.8)
DVF 5000	625 / 450 / 400 (24.6 / 17.7 / 15.7)	Ø500 (Ø19.7)	12000 {18000}	30 {40, 60, 90, 120}	18.5/11 (24.8/14.8)
DVF 5000 <sup>2nd</sup>	650 / 520 / 480 (25.6 / 20.5 / 18.9)	Ø630 (Ø24.8)	15000 {20000}	30 {40, 60, 120}	FANUC : 18.5 / 11 <sup>1)</sup> HEIDENHAIN : 17 / 10 <sup>1)</sup> SIEMENS : 16. / 11 <sup>2)</sup>
DVF 6500	750 / 785 / 600 (29.5 / 30.9 / 23.6)	Ø650 (Ø25.6)	12000 {18000}	40 {60,90,120}	FANUC : 22 / 18.5 <sup>1)</sup> (29.5/24.8) HEIDENHAIN : 30 / 24 <sup>3)</sup> (40.2/32.2)
DVF 8000	1000 / 900 / 685 (39.4 / 35.4 / 27.0)	Ø800 (Ø31.5)	12000 {18000}	40 {60, 90, 120}	FANUC : 22 / 18.5 <sup>1)</sup> (29.5/24.8) HEIDENHAIN/SIEMENS : 30 / 24 <sup>3)</sup> (40.2/32.2)
DVF 8000T	1000 / 900 / 685 (39.4 / 35.4 / 27.0)	Ø800 (Ø31.5)	18000	40 {60, 90, 120}	FANUC : 22 / 18.5 <sup>1)</sup> (29.5/24.8) HEIDENHAIN/SIEMENS : 30 / 24 <sup>3)</sup> (40.2/32.2)
DNM 200/5AX	400 / 435 / 500 (15.7 / 17.1 / 19.7)	Ø200 (Ø7.9)	12000	30 {40}	18.5/11 (24.8/14.8)
DNM 350/5AX	600 / 655 / 500 (23.6 / 25.8 / 19.7)	Ø350 (Ø13.8)	12000 { 20000 }	30 {40, 60}	18.5/11 (24.8/14.8)
VC 630/5AX	650 / 765 / 520 (25.6 / 30.1 / 20.5)	Ø630 (Ø24.8)	12000 { 20000 }	40 {60, 81, 101, 121}	FANUC : 22/18.5** (29.5/24.8) HEIDENHAIN : 23.5/18*** (31.5/24.2) SIEMENS : 30/24*** (40.3/32.2)
FM 200/5AX linear	200 / 340 / 300 (7.9 / 13.4 / 11.8)	Ø200 (Ø7.9)	42000	24	12.6**** (16.9)
FM 350/5AX linear	400 / 600 / 350 (15.7 / 23.6 / 13.8)	Ø350 (Ø13.8)	42000	40	12.6**** (16.9)

{ } : Option \* 10min / Cont. \*\*S3 25%/Cont. \*\*\*S6 40%/Cont. \*\*\*\* Cont. 1) S3 25%/CONT. , 2) S6 40%/CONT.

Overview

Product Full Line-up

- Full Line-up of Products
- Turning Center
- Machining Center
- Double Column Machining Center
- Boring Machine

CUFOS

Optimal Technology

EZ Work

Service

Global Support

Network

Overseas Supplies

System

## Machining Center

Multi Purpose Vertical Machining Center / Vertical Machining Center for Die & Mold Machining / Ultra-high-Speed, High-Precision Vertical Machining Center Equipped with Linear Motors

### VC 3600 / 430 / 510, VC 3600/30

High productivity machining center equipped with dual pallet




Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r/min)	Tool Storage (ea)	Motor * kW (Hp)
VC 3600	520 / 360 / 465 (20.5 / 14.2 / 18.3)	2-650 x 375 (2-25.6 x 14.8)	12000	20	18.5 (24.8)**
VC 3600/30	520 / 360 / 350 (20.5 / 14.2 / 13.8)	2-650 x 375 (2-25.6 x 14.8)	12000 {18000}	14 {21/24}	13/3.7 (17.4/5.0)
VC 430	560 / 430 / 570 (22.0 / 16.9 / 22.4)	2-712 x 477 (2-28.0 x 18.8)	10000 {12000}	30 {40}	18.5/15 (24.8/20.1)
VC 510	762 / 516 / 570 (30.0 / 20.3 / 22.4)	2-860 x 570 (2-33.9 x 22.4)	10000 {6000, 12000}	30 {40}	18.5/15 (24.8/20.1)

{} : Option \* 30min/Cont. \*\* S3 15%

### VCF 5500 / VCF 850 II

Multi Purpose Vertical Machining Center

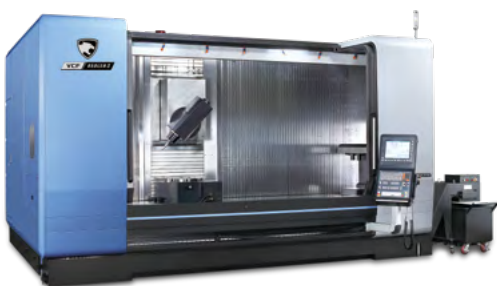

Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor kW (Hp)
VCF 5500L	2200 / 550 / 510 (86.6 / 21.7 / 20.1)	2500 x 580 (98.4*22.8)	12000	30 {40/60}	18.5/11 (24.8/14.8)
VCF 5500UL	5000 / 550 / 570 (196.9 / 21.7 / 22.4)	5600 x 550 (220.5 x 21.7)	12000	35	18.5/11 (24.8/14.8)
VCF 5500SL	6200 / 550 / 570 (244.1 / 21.7 / 22.4)	6600 x 580 (259.8 x 22.8)	12000	35	18.5/11 (24.8/14.8)
VCF 850SR II	2000 / 850 / 800 (78.7 / 33.5 / 31.5)	2500 x 870 (98.4 x 34.3)	12000 {18000}	30 {60}	HEIDENHAIN : 32/24* (42.9/32.2) FANUC : 22/18.5** (29.5/24.8)
VCF 850LSR II	3000 / 850 / 800 (118.1 / 33.5 / 31.5)	3500 x 870 (137.8 x 34.3)	12000 {18000}	30 {60}	HEIDENHAIN : 32/24* (42.9/32.2) FANUC : 22/18.5** (29.5/24.8)

{} : Option \*S6 40%/Cont. \*\*30min/Cont.

### VM 5400 / 6500 (#40)

High Performance Vertical Machining Center for Die & Mold Machining



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
VM 5400	1020 / 540 / 530 (40.2 / 21.3 / 20.9)	1200 x 540 (47.2 x 21.3)	12000	30 {40}	15.6 / 15.6 (20.9 / 20.9)
VM 6500	1270 / 670 / 625 (50.0 / 26.4 / 24.6)	1400 x 670 (55.1 x 26.4)	12000	30 {40}	15.6 / 15.6 (20.9 / 20.9)

{} : Option \* 30min/Cont.

### VM 750 / 750L / 960 / 960L / 1260 (#50)

Large, High-Speed, High-Precision Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
VM 560	1050 / 650 / 560 (41.3 / 25.6 / 22.0)	1600 x 560 (63.0 x 22.0)	12000	30	22/18.5 (29.5/24.8)
VM 750	1500 / 750 / 800 (59.1 / 29.5 / 31.5)	1600 x 800 (63.0 x 31.5)	6000 {8000, 12000}	30 {40}	18.5/15 (24.8/20.1)
VM 750L	1800 / 750 / 800 (70.9 / 29.5 / 31.5)	1900 x 800 (74.8 x 31.5)	6000 {8000, 12000}	30 {40}	18.5/15 (24.8/20.1)
VM 960	2000 / 960 / 800 (78.7 / 37.8 / 31.5)	2400 x 950 (94.5 x 37.4)	6000 {8000, 12000}	30 {40}	18.5/15 (24.8/20.1)
VM 960L	2400 / 960 / 800 (94.5 / 37.8 / 31.5)	2600 x 950 (102.4 x 37.4)	6000 {8000, 12000}	30 {40}	18.5/15 (24.8/20.1)
VM 1260	2500 / 1260 / 900 (98.4 / 49.6 / 35.4)	2800 x 1260 (110.2 x 49.6)	6000 {8000, 12000}	40	22/18.5 (29.5/24.8)

{} : Option \* 30min/Cont. \*\* 15min/Cont.



## MD 6700

New Generation Die&Mold Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor kW (Hp)
MD 6700	1300 / 670 / 670 (51.2 / 26.4 / 26.4)	1500 x 670 (59.1 x 26.4)	12000 { 8000 }	24 { 30 }	30 (40.2)
{} : Option					

## DVM 500 II / 650 II

High Precision Die & Mold Vertical Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
DVM 500 II	1020 / 540 / 510 (40.2 / 21.3 / 20.1)	1200 x 540 (47.2 x 21.3)	20000	30 { 40 }	22/11 (29.5/14.8)
DVM 650 II	1270 / 670 / 625 (50.0 / 26.4 / 24.6)	1300 x 670 (51.2 x 26.4)	20000	30 { 40 }	22/11 (29.5/14.8)
{} : Option * S3 15%, 10min/Cont.					

## NX 5500 II / MP 6500

High-Precision, High-Speed Vertical Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
NX 5500 II	900 / 550 / 500 (35.4 / 21.7 / 19.7)	1000 x 550 (39.4 x 21.7)	20000 { 30000, 40000 }	30	22/11 (29.5/14.8)
MP 6500	1050 / 650 / 550 (41.3 / 25.6 / 21.7)	1200 x 650 (47.2 x 25.6)	20000	30	22/11 (29.5/14.8)
{} : Option * 10min 15%/Cont.					

## VX 6500C/G

High-Precision Special Machining Center



Machine	X / Y / Z Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
VX 6500C	1050 / 650 / 550 (41.3 / 25.6 / 21.7)	1200 x 650 (47.2 x 25.6)	12000{20000}	30	18.5/11* (24.8/14.8)*
VX 6500G	1050 / 650 / 550 (41.3 / 25.6 / 21.7)	1200 x 650 (47.2 x 25.6)	12000 { 20000/30000/40000 }	30	18.5/11* (24.8/14.8)*
{} : Option * S3 15%/Cont.					

Overview

Product Full Line-up

- Full Line-up of Products
- Turning Center
- Machining Center
- Double Column Machining Center
- Boring Machine

- CUFOS
- Optimal Technology
- EZ Work
- Service

- Global Support Network
- Overseas Supplies System

## Machining Center

Compact Horizontal Machining Center / High Speed High Performance Horizontal Machining Center / High Capability Horizontal Machining Center / Large Horizontal Machining Center

### NHC 4000 / 5000

Compact Horizontal Machining Center




Machine	X / Y / Z Travel mm (inch)	Pallet Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
NHC 4000	600 / 560 / 565 (23.6 / 22.0 / 22.2)	400 x 400 (15.7 x 15.7)	8000 {12000, 15000}	40 {60, 80, 120, 170, 262}	18.5/11 (24.8/14.7)
NHC 5000	850 / 700 / 750 (33.5 / 27.6 / 29.5)	500 x 500 (19.7 x 19.7)	8000 {12000, 15000}	40 {60, 80, 120, 170, 262}	18.5/11 (24.8/14.7)

{} : Option \* 15min/Con

### NHP 4000 / 5000 / 5500 / 6300 / 8000

High-Speed, High-Productivity Horizontal Machining Center

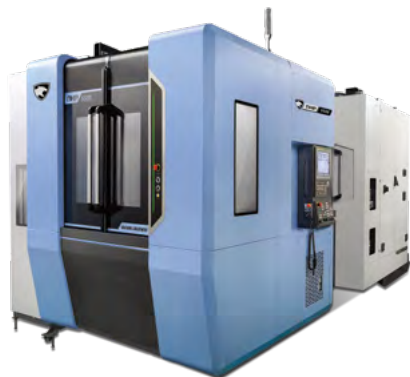

Machine	X / Y / Z Travel mm (inch)	Pallet Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
NHP 4000	560 / 640 / 660 (22.0 / 25.2 / 26.0)	400 x 400 (15.7 x 15.7)	15000 {15000, 20000}	40 {60, 80, 120, 171, 275}	30/18.5 {37/22, 37/18.5} (40.2/24.8 {49.6/29.5, 49.6/24.8})
NHP 5000	730 / 730 / 880 (28.7 / 28.7 / 34.6)	500 x 500 (19.7 x 19.7)	15000 {15000, 20000}	40 {60, 80, 120, 171, 275}	30/18.5 {37/22, 37/18.5} (40.2/24.8 {49.6/29.5, 49.6/24.8})
NHP 5500	800 / 750 / 850 (31.5 / 29.5 / 33.5)	500 x 500 (19.7 x 19.7)	10000 {6000 / 15000}	40 {60, 90, 120, 150, 196, 256, 316, 376}	45/25 (60.3/33.5)
NHP 5500 <sup>2nd</sup>	800 / 750 / 900 (31.5 / 29.5 / 35.4)	500 x 500 (19.7 x 19.7)	10000 {10000, 15000}	40 {60, 90, 120, 150, 196, 256, 316, 376}	37/30/26 {49.6/40.2/34.9} (45/37/30/26, 37/30){60.3/49.6/40.3/49.6/40.2}
NHP 6300	1050 / 900 / 1000 (41.3 / 35.4 / 39.4)	630 x 630 (24.8 x 24.8)	10000 {6000 / 15000}	40 {60, 90, 120, 150, 196, 256, 316, 376}	45/25 (60.3/33.5)
NHP 8000	1400 / 1200 / 1370 (55.1 / 47.2 / 53.9)	800 x 800 (31.5 x 31.5)	10000 {6000 / 15000}	40 {60, 90, 120, 150, 196, 256, 316, 376}	45/25 (60.3/33.5)

{} : Option \* S3 25%/Cont.

### NHM 5000 / 6300 / 8000

Heavy duty Capability Horizontal Machining Center



Machine	X / Y / Z Travel mm (inch)	Pallet Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor* kW (Hp)
NHM 5000	800 / 700 / 850 (31.5 / 27.6 / 33.5)	500 x 500 (19.7 x 19.7)	6000 {8000}	60 {90, 120, 150, 196, 256, 316, 376}	25/15 (33.5/20.1)
NHM 6300	1050 / 850 / 1000 (41.3 / 33.5 / 39.4)	630 x 630 (24.8 x 24.8)	6000 {8000}	60 {90, 120, 150, 196, 256, 316, 376}	35/22** (46.9/29.5)
NHM 8000	1400 / 1050 / 1200 (55.1 / 41.3 / 47.2)	800 x 800 (31.5 x 31.5)	6000 {8000}	60 {90, 120, 150, 196, 256, 316, 376}	35/22** (46.9/29.5)

{} : Option  
\* S3 25%/Cont. \*\* S3 10%/Cont.

## HM 1000 / 1250

Large Horizontal Machining Center



Machine	X / Y / Z / W Travel mm (inch)	Pallet Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor* kW (Hp)
HM 1000	2100 / 1250 / 1250 / - (82.7 / 49.2 / 49.2 / -)	1000 x 1000 (39.4 x 39.4)	6000 {8000}	60 { 90, 120, 196, 256 }	26/22 (34.9/29.5)
HM 1250	2100 / 1500 / 1500 / - (82.7 / 59.1 / 59.1 / -)	1250 x 1250 (49.2 x 49.2)	6000 {8000}	60 {90/120/196, 256,316(MATRIX)}	26/22 (34.9/29.5)
HM 1250W	2100 / 1400 / 1400 / 300 (82.7 / 55.1 / 55.1 / 11.8)	1250 x 1250 (49.2 x 49.2)	3000	60 {90/120/196, 256,316(MATRIX)}	45/37 (60.3/49.6)
{} : Option * 30min/Cont.					

## DHF 8000 / ST

5 axis Horizontal Machining Center



Machine	X / Y / Z Travel mm (inch)	Pallet Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor* kW (Hp)
DHF 8000 / ST	1450 / 1200 / 1500 (57.1 / 47.2 / 59.1)	800 x 800 (31.5 x 31.5)	6000 {15000, 30000}	60 {90, 120, 150, 196 ~ 376}	35/22 (46.9/29.5)
{} : Option					

## HFP 1540

5 axis Horizontal Machining Center



Machine	X / Y / Z Travel mm (inch)	Pallet Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor* kW (Hp)
HFP 1540	4200 / 1600 / 550 (165.4 / 63.0 / 21.7)	4000 x 1500 (157.5 x 59.1)	30000	60	75 (100.6)
{} : Option					

Overview

Product Full Line-up

- Full Line-up of Products
- Turning Center
- Machining Center
- Double Column Machining Center
- Boring Machine

CUFOS

Optimal Technology

EZ Work

Service

Global Support

Network

Overseas Supplies

System

## Double Column Machining Center

### High Speed Double Column Machining Center

#### BM series

### High Speed Double Column Machining Center



Machine	X / Y / Z Travel mm (inch)	B/C Swivel Angle (deg)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor * kW (Hp)
BM 1530M	3000 / 1550 / 800 (118.1 / 61.0 / 31.5)	-	3000 x 1350 (118.1 x 53.1)	8000 / 12000	40 { 60 }	30/25 (40.2/33.5)
BM 2035M	3500 / 2050 / 800 (137.8 / 80.7 / 31.5)	-	3500 x 1850 (137.8 x 72.8)	8000 / 12000	40 { 60 }	30/25 (40.2/33.5)
BM 2035U	3500 / 2050 / 800 (137.8 / 80.7 / 31.5)	±110 / ±220	3500 x 1600 (137.8 x 63.0)	15000	60	45.9/34 (61.6/45.6)
BM 2740 / M	4000 / 2700 / 800 (157.5 / 106.3 / 31.5)	-	4000 x 2500 (157.5 x 98.4)	10000 / 12000	40 { 60 }	30/25 (40.2/33.5)
BM 2740U	4000 / 2500 / 800 (157.5 / 98.4 / 31.5)	±110 / ±220	4000 x 2500 (157.5 x 98.4)	15000 {30000}	60	45.9 / 34 (61.6 / 45.6) {90 / 78.3(120.7 / 105.0)}

{ } : Option \* 30min/Cont. \*\*Cont.

#### DBM / DCM II series

### Customized Double Column Machining Center



Machine	X/Y/Z(U)/W(U) Travelmm (inch)	B/C Swivel Angle (deg)	Table Size mm (inch)	Spindle Speed (r / min)	Effective width between column_mm (inch)	Motor* kW (Hp)
DBM 1525s	2800/1350/750/-	-	2800 x 1250	12000	1550	25**
DBM 2030 (U)	3250/2500/800 (128.0/98.4/31.5)	(±110 / ±220)	1500 x 3000 (59.1 x 118.1)	6000 {8000} (15000{30000})	2000 (78.7)	55/37** (73.8/49.6) (34 (45.6))**
DBM 2040 (U)	4250 / 2500 / 1100(800) (167.3 / 98.4 / 43.3(31.5))	(±110 / ±220)	1500 x 4000 (59.1 x 157.5)	6000 {8000} (15000{30000})	2000 (78.7)	55/37** (73.8/49.6) (34 (45.6))**
DBM 2540 (U)	4250 / 3000 / 1100(800) / - (167.3 / 118.1 / 43.3(31.5) / -)	(±110 / ±220)	2000 x 4000 (78.7 x 157.5)	6000 {8000} (15000{30000})	2500 (98.4)	55/37** (73.8/49.6) (34 (45.6))**
DBM 2550 (U)	5250 / 3000 / 1100(800) / - (206.7 / 118.1 / 43.3(31.5) / -)	(±110 / ±220)	2000 x 5000 (78.7 x 196.9)	6000 {8000} (15000{30000})	2500 (98.4)	55/37** (73.8/49.6) (34 (45.6))**
DBM 3050 (U)	5250 / 3500 / 1100(800) (206.7 / 137.8 / 43.3(31.5))	(±110 / ±220)	2500 x 5000 (98.4 x 196.9)	6000 {8000} (15000{30000})	3000 (118.1)	55/37** (73.8/49.6) (34 (45.6))**
DBM 3060	6250 / 3500 / 800(1100) (246.1 / 137.8 / 31.5(43.3))	-	2500x6000 (98.4 x 315.0)	6000{8000}	3000 (118.1)	55/37** (73.8/49.6)
DBM 3080	8250/3500/800 (324.8/137.8/31.5)	-	2500 x 8000 (98.4 x 315.0)	6000 {8000}	3000 (118.1)	55/37** (73.8/49.6)
DCM 2740F II (U)	4250 / 3200 / 700(1000) / 1100 (167.3 / 126.0 / 27.6(39.4) / 43.3)	(±110 / ±220)	2200 x 4100 (86.6 x 161.4)	6000 {4000, 12000} (15000{30000})	2700 (106.3)	25/22 (33.5/29.5) (34 (45.6))**
DCM 2750F II (U)	5250 / 3200 / 700(1000) / 1100 (206.7 / 126.0 / 27.6(39.4) / 43.3)	(±110 / ±220)	2200 x 5100 (86.6 x 200.8)	6000 { 4000, 12000} (15000{30000})	2700 (106.3)	25/22 (33.5/29.5) (34 (45.6))**
DCM 2760F II (U)	6250 / 3200 / 700(1000) / 1100 (246.1 / 126.0 / 27.6(39.4) / 43.3)	(±110 / ±220)	2200 x 6100 (86.6 x 240.2)	6000 { 4000, 12000} (15000{30000})	2700 (106.3)	25/22 (33.5/29.5) (34 (45.6))**
DCM 2780F II (U)	8250 / 3200 / 700(1000) / 1100 (324.8 / 126.0 / 27.6(39.4) / 43.3)	(±110 / ±220)	2200 x 8100 (86.6 x 318.9)	6000 { 4000, 12000} (15000{30000})	2700 (106.3)	25/22 (33.5/29.5) (34 (45.6))**
DCM 3250F II (U)	5250 / 3700 / 700(1000) / 1100 (206.7 / 145.7 / 27.6(39.4) / 43.3)	(±110 / ±220)	2700 x 5100 (106.3 x 200.8)	6000 { 4000, 12000} (15000{30000})	3200 (126.0)	25/22 (33.5/29.5) (34 (45.6))**
DCM 3260F II (U)	6250 / 3700 / 700(1000) / 1100 (246.1 / 145.7 / 27.6(39.4) / 43.3)	(±110 / ±220)	2700 x 6100 (106.3 x 240.2)	6000 { 4000, 12000} (15000{30000})	3200 (126.0)	25/22 (33.5/29.5) (34 (45.6))**
DCM 3280F II (U)	8250 / 3700 / 700(1000) / 1100 (324.8 / 145.7 / 27.6(39.4) / 43.3)	(±110 / ±220)	2700 x 8100 (106.3 x 318.9)	6000 { 4000, 12000} (15000{30000})	3200 (126.0)	25/22 (33.5/29.5) (34 (45.6))**
DCM 3780F II (U)	8250 / 4200 / 1000 / 1100(1400) (324.8 / 165.4 / 39.4 / 43.3(55.1))	(±110 / ±220)	3200 x 8100 (126.0 x 318.9)	6000 { 4000, 12000} (15000{30000})	3700 (145.7)	25/22 (33.5/29.5) (34 (45.6))**
DCM 37100F II (U)	10250 / 4200 / 1000 / 1100(1400) (403.5 / 165.4 / 39.4 / 43.3(55.1))	(±110 / ±220)	3200 x 10100 (126.0 x 397.6)	6000 { 4000, 12000} (15000{30000})	3700 (145.7)	25/22 (33.5/29.5) (34 (45.6))**
DCM 4280F II (U)	8250 / 5000 / 1000 / 1100(1400) (324.8 / 196.9 / 39.4 / 43.3(55.1))	(±110 / ±220)	3500 x 8100 (137.8 x 318.8)	6000 { 4000, 12000} (15000{30000})	4200 (165.4)	25/22 (33.5/29.5) (34 (45.6))**
DCM 3150/3160/3180 H	5250 {6250, 8250} / 3700 / 800 / 1200 (204.7 {246.1, 324.8} / 145.7 / 31.5 / 47.2)	-	2500 x {6000, 8000} (98.4 x {236.2, 315.0})	6000 {4000, 12000}	3200 (126.0)	37 (49.6) **

{ } : Option \* 30min/Cont. \*\* S3 25%/Cont.

## Boring Machine

Horizontal Boring Machine / Duplex Spindle Horizontal Boring Machine

### DBC 110 / 130 / 160

Horizontal Boring Machine



Machine	X / Y / Z / W Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r/min)	Tool Storage (ea)	Motor* kW (Hp)
DBC 110S	2000 / 1500 / 1200 / 500 (78.7 / 59.1 / 47.2 / 19.7)	1400 x 1600 (55.1 x 63.0)	3000	{40, 60, 90}	26/22 (34.9/29.5)
DBC 130S	2000 / 1500 / 1200 / 600 (78.7 / 59.1 / 47.2 / 23.6)	1400 x 1600 (55.1 x 63.0)	3000	40 {60 / 90}	26/22 (34.9/29.5)
DBC 110 II	2500 / 2000 / 1500 / 550 (98.4 / 78.7 / 59.1 / 21.7)	1400 x 1800 (55.1 x 70.9)	4000	{40, 60, 90}	26/22 (34.9/29.5)
DBC 130 II	3000 / 2000 / 1600 / 700 (118.1 / 78.7 / 63.0 / 27.6)	1600 x 1800 (63.0 x 70.9)	2500	{40, 60, 90}	26/22 (34.9/29.5)
DBC 130L II	4000 / 2500 / 2000 / 700 (157.5 / 98.4 / 78.7 / 27.6)	1600 x 1800 (63.0 x 70.9)	2500	{40, 60, 90}	26/22 (34.9/29.5)
DBC 160	4000 / 2500 / 1600 / 800 (157.5 / 98.4 / 63.0 / 31.5)	2000 x 2200 (78.7 x 86.6)	2000	{40, 60, 90}	45/37 (60.4/49.7)

{ } : Option \*30min/Cont.

### DBD series

Duplex Spindle Horizontal Boring Machine



Machine	X / Y / Z / W Travel mm (inch)	Table Size mm (inch)	Spindle Speed (r / min)	Tool Storage (ea)	Motor* kW (Hp)
DBD 1270	7000 / 1500 / 1000 / - (275.6 / 59.1 / 39.4 / -)	1250 x 7000 (49.2 x 275.6)	3000	{ 40, 60 }	26/22 (34.9/29.5)

{ } : Option \* 30min/Cont.

# CUFOS

## Customized User-friendly Flexible Operation Solutions

CUFOS is a PC based control system created by DN Solutions. Equipped with intuitive user-friendly functions such as a smart phone screen and easy customization, CUFOS helps to improve operational efficiency and performance for the user.

### • Features of CUFOS

#### User-Friendly

- **19 inch Multi Touch Screen**
- **Multiple Apps such as –**
  - **CPS app (Collision Protection System)**
  - **Turn-cut app**
  - Tool management app
  - Status monitoring and alarm guidance app
- **Max. program memory : 40GB<sup>option</sup>**
- App-based Interface for Smartphones & Tablet PC

#### Customized

- Simple Customization
- Extend Functionality with Additional apps
- Register for up to 6 individual users

#### Flexible

- Simple Connectivity with External Software (Cloud, Office etc.)
- SSD data server app
- PC based operating system (Windows®7)



# Optimal Technology

Continuous research and years of know-how of DN Solutions, offers reliability and convenience to our customers. Worldwide excellent technology will provide you the best solution.



## High speed Spindle Technology

Maximum speed and acceleration / deceleration speed are the two core performance factors of a spindle that affect a machine's productivity. DN Solutions has developed a high-speed, constant-pressure spindle optimized for high speed machining by introducing coil switching technology that can control and optimize power distribution on a structure with minimized vibration.



## Smart Monitoring Technology

DN Solutions develops and provides various features designed to enhance its machine tool performance and operational convenience in addition to the features inherent in the CNC system.



## High rigidity Guideway Technology

The high-rigidity box guideway installed in our products is equipped with air-based semi-floating technology. DN Solutions has applied its unique semi-floating sliding plate, which slashes maintenance costs through the reduction of engine oil consumption.



## Easy Operation Technology

Build your own Smart Factory with all doo control that offers monitoring data collection from various machine tools, ERP connection & data accumulation, and data analysis & solution provision by AI algorithm etc.



## Thermal Stability Technology

DN Solutions possesses technologies that minimize the impact of plant environments on machine tools, including a variety of technologies related to cooling and pre-load methods, low-heat ball screws, and cooling oil inside the main shaft.



## Eco-Friendly Technology

DN Solutions deliver eco-friendly value and energy savings in addition to the machine's own performance.

Product Full Line-up

- Full Line-up of Products
- Turning Center
- Machining Center
- Double Column Machining Center
- Boring Machine

CUFOS

- Optimal Technology
- EZ Work**
- Service

Global Support

- Network
- Overseas Supplies
- System

# EZ Work

EZ Work is a smart software program consisting of about 70 convenient features designed to help customers carry out their setting/operation tasks more easily and conveniently. It will help them to improve their productivity through accurate, fast machining operations.

## Convenient Control

These software features are designed to enable users to operate their machine tools conveniently. They help users carry out their program setting and scheduling tasks easily through NC screens, manage/handle accessory devices and tools effectively, and fix problems when alarms ring or problems arise.

### Program setting


- CALCULATOR
- PATTERN CYCLE FOR DCM
- ENGRAVING
- WORK OFFSET SETTING
- G-CODE LIST
- M-CODE LIST

### Operation control


- MACHINE MOVING FOR SETUP
- ATC / APC / AAC SETTING SCREEN
- RENISHAW GUI
- APC SETTING SCREEN
- MATRIX
- MULTI PALLET MAGAZINE (PMG)
- MULTI PALLET STATION(MPS)
- 5APC
- TAIL STOCK THRUST SETTING
- PMC SOFT PANEL SWITCH
- Q-SETTER GUIDE (DEVELOPING)
- MULTI FACE SUPPORT

### Easy Maintenance

- ALARM GUIDANCE
- ATC RECOVERY HELP
- EASY NC PARAMETER HELP
- TOOL DATA REGISTRY SCREEN
- TOOL MANAGEMENT I
- TOOL MANAGEMENT II (with Tool ID)
- TOOL MANAGEMENT 8-digits (with Tool ID)

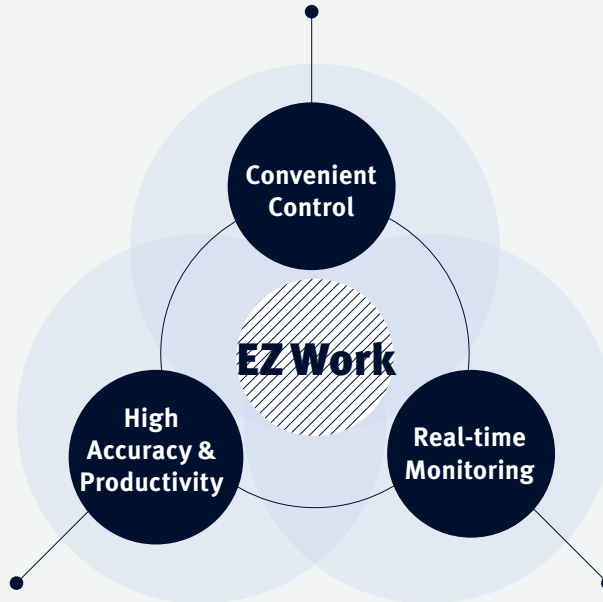

### TOOL MANAGEMENT(example)




- Tool information
- Tool number
  - Tool name
  - Tool size, status
  - Manage broken or warning tool
  - Switch tool
  - Regist and set manual tool

## High Accuracy & high Productivity

This feature helps improve users' productivity by ensuring that they can carry out their machining operations more accurately and efficiently.

- SMART THERMAL COMPENSATION
- SQUARENESS COMPENSATION
- AUTOMATIC BACKLASH COMPENSATION
- DCP-i
- AFC(Adaptive Feed Control)

### DCP-i (DN Solutions Center Point position Intelligence)

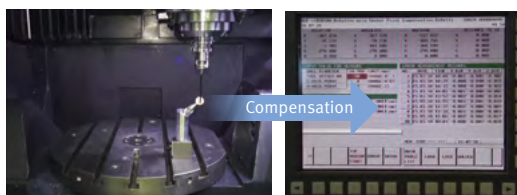

## Real-time Monitoring

This feature enables users to monitor everything that takes place during their machining operations in real time. Users can check their machining progress rates and machining results.

- OPERATION RATE
- SENSOR STATUS MONITOR
- TOOL LOAD MONITOR
- PRODUCT COUNT
- TOOL LIFE COUNT

### AFC (Adaptive Feed Control)



AFC 'OFF'  
02:19



AFC 'ON'  
01:49



# Customer Support Service

We offer 24-hour personalized customer service. We help customers to achieve success by providing a variety of professional services from pre-sales consultancy to post-sales support.



## Supplying Parts

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service



## Field Services

- On site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair



## Technical Support

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy



## Training

- Programming / machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



# Responding to Customers Anytime, Anywhere

## DN Solutions' Global Network, Responding to Customer's Needs nearby, Anytime, Anywhere

DN Solutions provides a system-based professional support service before and after the machine tool sale by responding quickly and efficiently to customers' demands. By supplying spare parts, product training, field service and technical support, we can provide top class support to our customers around the world.



### Global Sales and Service Support Network

Corporations	Dealer Networks	Technical Centers	Service Post	Factories
6	155	51 <small>Technical Center: Sales Support, Service Support, Parts Support</small>	204	3

# Overseas Supplied System

## DN Solutions Products Working In Industries World Wide

Machining systems | Flexible Manufacturing Cells | Flexible Manufacturing System | Flexible Transfer Line

### UNITED STATES

Alco Controls  
Allied Signal  
Allied Signal Engines  
Ambel Precision  
Manufacturing Co.  
American Sleeve Bearing  
Anchor Hocking  
ATM Specialties  
B.F. Goodrich Aerospace  
Baldor Electric  
Baldor Electric Co.  
Bath Iron Works  
Bendix Benz  
Bimba Manufacturing  
Bosche  
Browning Bosche  
Brunswick  
Buck Chuck  
Camco  
Carrier  
Caterpillar  
Chicago Roll  
Clark Equipment  
Colts Manufacturing  
Combustion Engineering  
Cooper Industries

Cooper Power Tools  
Cushman  
Dana  
Dana Spicer  
Darmark Corp.  
Dayton Progress  
Dresser  
E.G. & G.  
Eaton  
Elgin Sweeper  
Emerson Electric  
Fastenal Inc.  
Federal Mogal  
Federal Signal  
Ford  
France Compressor Products  
General Dynamics  
General Motors  
George Fisher Foundries  
Gildea  
Grimes Engineering  
Hexatron Engineering  
Hydraw Flow  
I. B. M.  
In-Sink-EratorInvar  
Manufacturing  
ITT Engineered Valves

Jacobs Vehicle  
Jake Brake  
Kellogg Crankshaft  
Kelsey-Hayes  
Kuhn Industries  
Kurk Manufacturing  
TCN Vehicles Division S.r.l.  
TEKNO S.r.l.  
VIAR Meccanica S.r.l.  
Lift-Tech International , Inc.  
Marathon Electric Company  
Mason & Hanger  
Mennies  
Milwaukee Electric  
Modern Tooling  
Outboard Marine Corp.  
Parker-Hannifin  
PGI International  
Sikorsky  
Spicer Heavy Axle  
Stace Allen Chucks  
TDM Corp.  
Technical Machine Service  
Triad Machine  
Trompler Co.  
TRW  
Twin Disk

Union Special Corp.  
United Technologies  
US Axle, Inc.  
Valentek Olivette  
Van Corp.  
Velan Engineering  
W.D. Lee & Co.  
WABCO Locomotive Products  
Watts Industries  
Westinghouse Electric  
White Rodgers  
Zurn Industries

### GERMANY

Benz Sohne  
Deutsche Metallwerke  
Duspohl  
Erco Leuchten  
Fischer Mess-und  
Regeltechnik  
Flender AG  
Gestra AG  
Heraeus  
Intra  
R & H Alurad Group  
Regeltechnik Kornwestheim  
Ronald Group

### ITALY

A.D.R. S.r.l.  
Atomat S.p.A.  
Baruffaldi S.p.A.  
Brembo S.p.A. Divisione  
Dischi  
Contarini Leopoldo S.r.l.  
Dott. Ing. Mario Cozzani  
S.r.l.  
Franzoni Ruggero  
Fucine Rostagno S.p.A.  
Manfredini Doviglio & C.  
S.n.c.  
Meccanica Melegari S.r.l.  
Mekanotech S.n.c. di  
Perissinotto  
O/Cava Meccanica S.p.A.  
O.M.L. di Antonioli T. &  
C.S.a.s.  
O.M.G. S.p.A. di Messieri &  
C.  
Roero Meccanica S.r.l.  
SFARMEC S.r.l.  
TCN Vehicles Division S.r.l.  
TEKNO S.r.l.  
VIAR Meccanica S.r.l.

### U. K

Anson  
Automatic Components  
Bombardier  
British Aerospace  
Depuy  
Firth Rixon  
FMC Technologies  
GKN  
Hewland Engineering  
Howdens  
Kawasaki Heavy Industries  
Nikken  
Pear Engineering  
Renishaw  
Rolls Royce Aerospace  
Rolls Royce  
RT Quaiife  
Sandvik Medical  
Slomaw Engineering  
Smith and Nephew  
Thales Defence  
Trelleborg

### INDIA

Ace Designers Ltd  
Amtex Auto Limited  
Apex Auto Limited  
BRAKES India Ltd  
CRI Pumps Pvt. Ltd  
Cummins India Ltd  
GNA Enterprises Limited  
International Auto Limited  
KIRLOSKAR Brothers Ltd  
KIRLOSKAR Ebara Pumps Ltd  
KIRLOSKAR Oil Engines Ltd  
KIRLOSKAR Pneumatic Co. Ltd  
Ramkrishna Forgings Limited  
Rico Auto Industries Ltd  
TATA motors  
Wheels India Ltd

### MALAYSIA

Hicom Engineering  
OMS Oilfield Services  
Sapura Machining  
SMEA  
Takako Vietnam  
TRW

### SINGAPORE

ASM Front-End  
Manufacturing

### INDONESIA

PT. Inti Ganda Perdanan  
Group

### JAPAN

Komatsu  
Nissan  
SNK

### THAILAND

Delphi  
Honda Automobile  
TRW

### BRAZIL

Volkswagen

### HUNGARY

Rabbe

### SWEDEN

Volvo

### IRAN

Mega motors  
Saipa Malleable

### MEXICO

Delphi

### CHINA

FAW Group  
Flender  
JAC Group  
KF Valve  
KNORR  
SAIC  
Sany Group  
Shaanxi Fast Group  
WEICHAI Power  
XCMG Group

### PAKISTAN

KSB Pumps  
Rastgar Engineering

### UAE

Ados Engineering Industries  
FTV Proclad  
Hoerbiger Service ME  
Weatherford

### SAUDI ARABIA

Saudi Mechanical Industries

### OMAN

Cameron Services  
Middle East  
United Engineering Services



[dn-solutions.com](http://dn-solutions.com)

#### **Head Office**

19F, 10, Tongil-ro,  
Jung-gu Seoul,  
Republic of Korea, 04527  
Tel: +82-2-6972-0370/0350  
Fax: +82-2-6972-0400

#### **DN Solutions America**

19A Chapin Road,  
Pine Brook New Jersey 07058,  
United States  
Tel: +1-973-618-2500  
Fax: +1-973-618-2501

#### **DN Solutions Europe**

Emdener Strasse 24,  
D-41540 Dormagen, Germany  
Tel: +49-2133-5067-100  
Fax: +49-2133-5067-111

#### **DN Solutions India**

No.82, Jakkuar Village  
Yelahanka Hobli,  
Bangalore-560064  
Tel: + 91-80-2205-6900  
E-mail:  
[india@dncompany.com](mailto:india@dncompany.com)

#### **DN Solutions China**

Room 101,201,301,  
Building 39 Xinzhuan Highway  
No.258 Songjiang District  
China Shanghai (201612)  
Tel: +86 21-5445-1155  
Fax: +86 21-6405-1472

#### **DN Solutions Mexico**

Avenida central 605,  
Parque Logistico,  
San Luis Potosí, 78395, Mexico

#### **DN Solutions Vietnam**

M.O.R.E building 2F, 40A-40B  
Ut Tich Street, 04 Ward 04,  
District Tan Binh District,  
Ho Chi Minh City, Vietnam  
Tel: +84 28-7304-0163

#### **Sales inquiry**

[sales@dncompany.com](mailto:sales@dncompany.com)

\* For more details, please contact DN Solutions.

\* Specifications and information contained within this catalogue may be changed without prior notice.