

TWIN-SPINDLE, TWIN-TURRET TURNING CENTERS WITH Y-AXES

# PUMA TT 1300·2100

**PUMA TT 1300SY/SYY**

**PUMA TT 2100SY**



# PUMA TT 1300·2100

The PUMA TT1300SY/SYY and TT2100SYY are 42-81mm (5-10 inch) bar capacity high productivity horizontal turning centers. They are equipped with twin opposed spindles and upper/lower turrets with Y-axis. The left and right spindles can process workpieces independently to achieve excellent productivity. The workpieces processed by the left and right spindles are discharged via an automatic system. The TT Series has become one of DN Solutions's bestselling products and is favored by customers all around the world. The compact PUMA TT is packed with one-setup efficiency. Thanks to its 24 tool positions in the upper and lower turrets, you'll complete complicated parts that require plenty of tools in just one setup.

## CONTENTS

### Product Overview

### Basic Information

- 04 Basic Structure
- 05 Flexible Machining
- 06 Spindle
- 07 Turret
- 08 Cutting Concepts

### Detailed Information

- 11 Standard / Optional Specifications
- 12 Peripheral Equipment
- 15 Fanuc i Plus
- 16 SINUMERIK ONE
- 17 Power | Torque
- 18 External Dimensions
- 20 Tooling System
- 22 Tool Interface
- 23 Working Range
- 25 Machine Specifications

### Customer Support Service

- 27 Customer Support and Services
- 27 Global Network



## DOUBLED PRODUCTIVITY



The left and right spindles and the upper and lower turrets operate independently to double the TT's productivity. Adding a lower Y-axis increased the productivity 20% more than having only upper Y-axis.

## FLEXIBLE SIZING



The TT's 5-, 6-, 8- and 10-inch chucks and 42 to 81mm bar capacity ensure customers can select the ideal machine.

## ADVANCED UNLOADER SYSTEM



The left and right spindles are equipped with independent upgraded part catcher and unloader systems to provide a fully automated manufacturing system. The enhanced parts unloader system sports 33% more productivity than the previous model.




# BASIC STRUCTURE


All axis in the TT are equipped with roller LM guide ways for increased rigidity and high speed, providing maximum productivity.

## Feed axis construction

High productivity is achieved with a process-intensive structure comprising opposing types of spindles and upper and lower turrets.

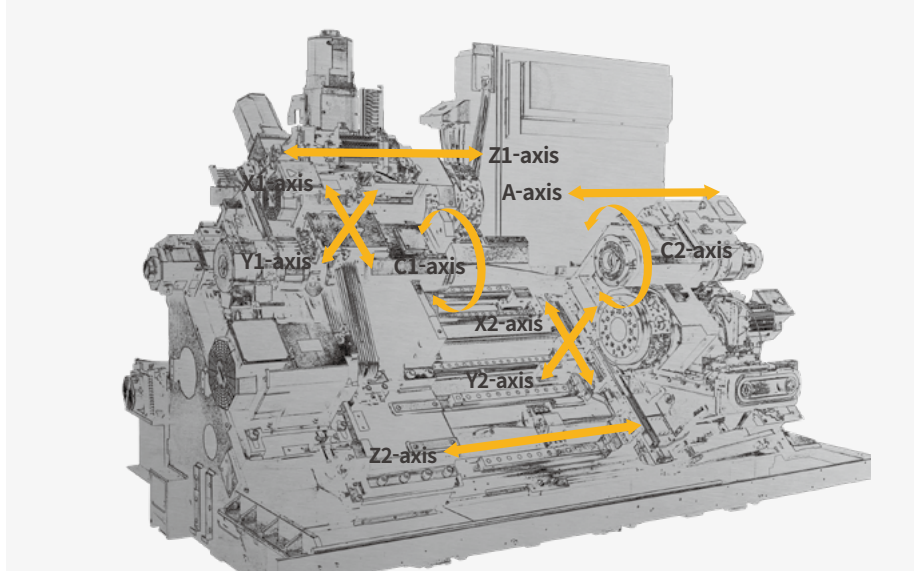


Description		Unit	PUMA TT1300SY / SY	PUMA TT2100SY
Travel distance	X1, X2 axis	mm (inch)	X1 : 135 (5.3)/X2 : 135 (5.3) (PUMA TT1300SY) X1 : 135 (5.3)/X2 : 150 (5.9) (TT 1300SY)	X1 : 165 (6.5), X2: 165 (6.5)
	Z1, Z2 axis	mm (inch)	Z1 : 530 (20.9), Z2: 530(20.9)	Z1 : 700 (27.6), Z2: 700 (27.6)
	Y-axis	mm (inch)	80(±40) (3.1(±1.6))	100 (±50) (3.9 (±2.0))
	A-axis	mm (inch)	540 (21.3)	730 (28.7)
Rapid traverse rate	X1, X2 axis	m/min (ipm)		30 (1181.1)
	Z1, Z2 axis	m/min (ipm)		40 (1574.8)
	Y-axis	m/min (ipm)		15 (590.6)
	A-axis	m/min (ipm)		40 (1574.8)

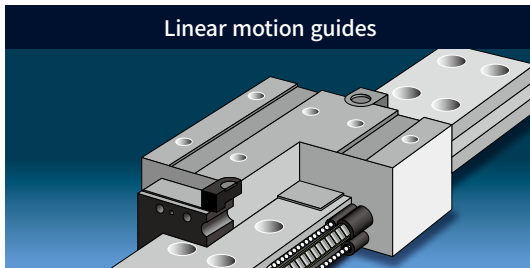

Linear motion guides


High rigidity and high speed structures with roller LM guides.

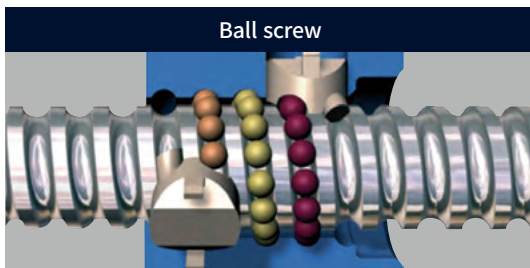

Ball screw


Temperature fluctuations on the travel system have been minimized through the use of low friction ball screws.

Designed as a wide-rib torque-tube structure to prevent twisting and deformation.

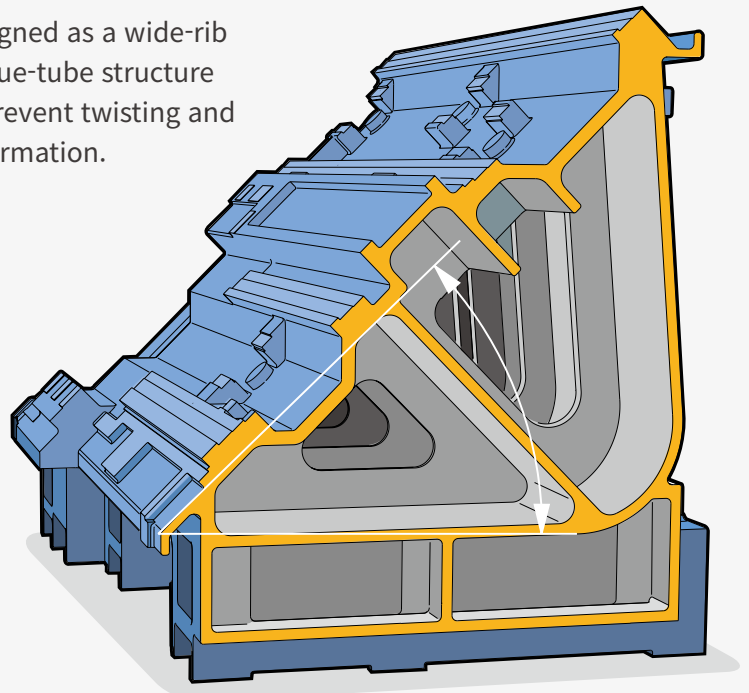

# FLEXIBLE MACHINING

PUMA TT1300SY·TT2100SY Maximum turning capabilities

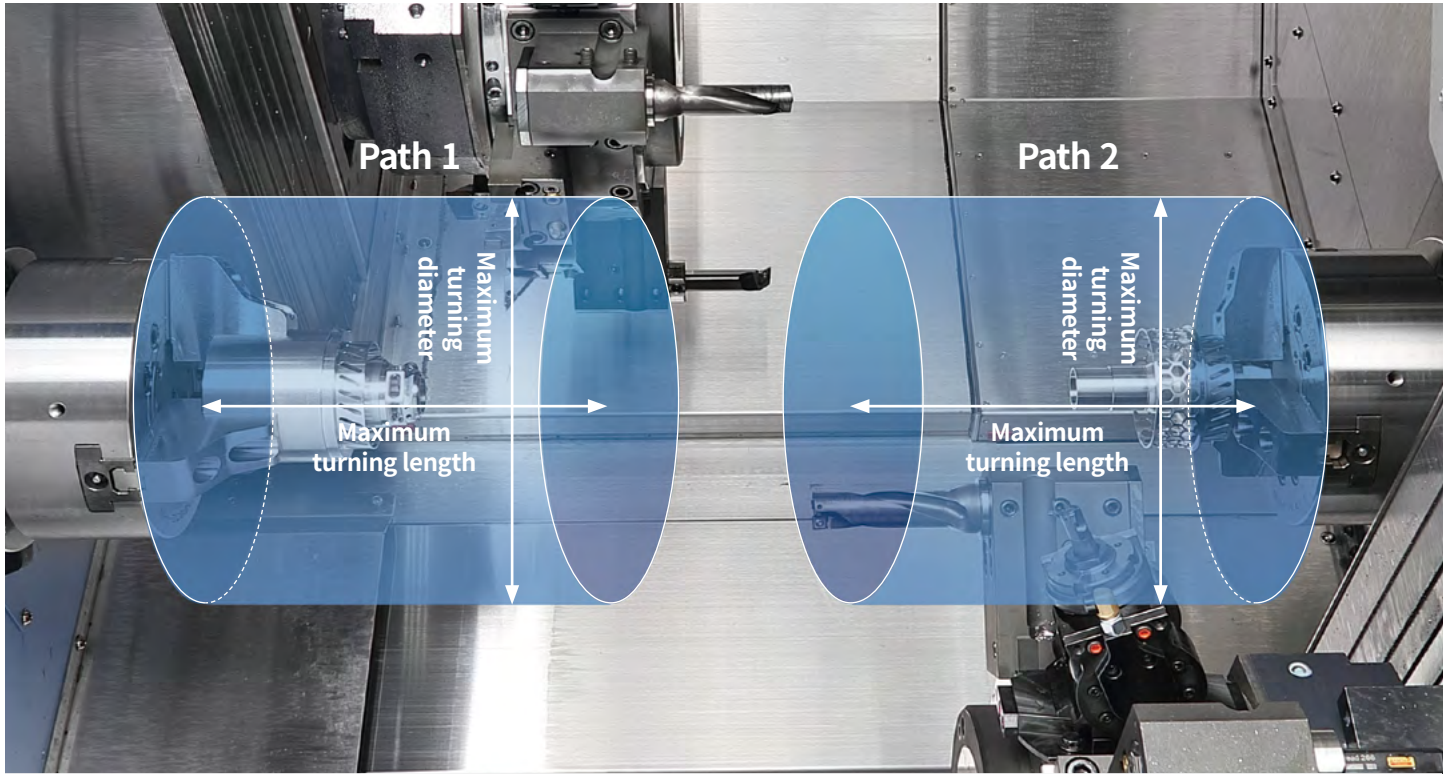

Max turning diameter / path length

PUMA TT 1300SY/SYY

**Ø175/120** mm (Ø6.9/4.7 inch)

PUMA TT 2100SY

**Ø230/230** mm (Ø9.1/9.1 inch)

## Y-axis milling

A wide variety of multi-axis milling cycles can be achieved using the Y-axis.

Y1/Y2-axis stroke

PUMA TT 1300SY/SYY

**80**(±40) mm (3.1 (±1.6) inch)


PUMA TT 2100SY

**100**(±50) mm (3.9 (±2.0) inch)


Y1/Y2- axis rapid traverse

**15** m/min (590.6 ipm)


Groove finish cutting using the Y-axis

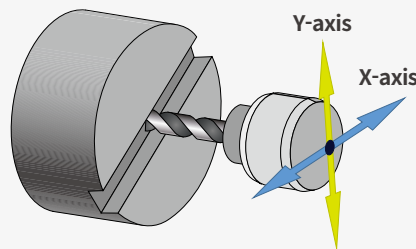


Multi-face cutting

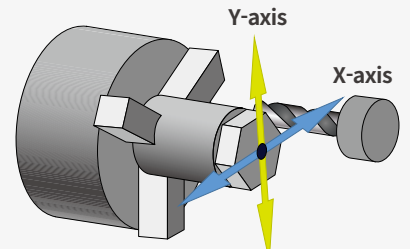

Milling in an eccentric position

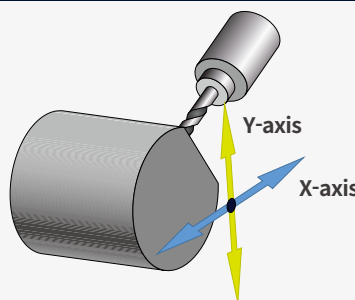

Y & X-axis circular interpolation

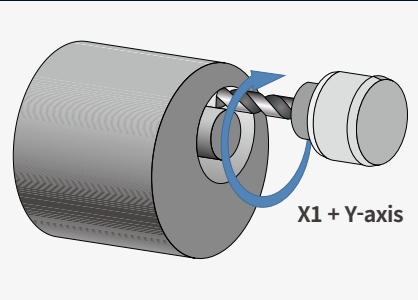

# SPINDLE INFORMATION

Highly rigid, low vibration belt spindle design, applied taper rollers and two angular bearings enhance the reliability of the spindle. The best torque and power give the user the highest cutting performance possible.

## Max spindle speed

PUMA TT 1300SY/SYY

**6000** r/min

PUMA TT 2100SYY

**5000** r/min

## Max power

PUMA TT 1300SY/SYY

**11/5.5** kW (14.8 / 7.4 Hp)

PUMA TT 1300SYYB

**15/7.5** kW (20.1 / 10.1 Hp)

PUMA TT 2100SYY

**25/15** kW (33.5 / 20.1 Hp)

PUMA TT 2100SYYB

**22/18.5** kW (29.5/ 24.8 Hp)

## Max torque

PUMA TT 1300SY/SYY

**93** N·m (68.6 ft-lbs)

PUMA TT 1300SYYB


**116** N·m (85.6 ft-lbs)

PUMA TT 2100SYY

**223** N·m (164.6 ft-lbs)



PUMA TT 2100SYYB

**244** N·m (180.1 ft-lbs)

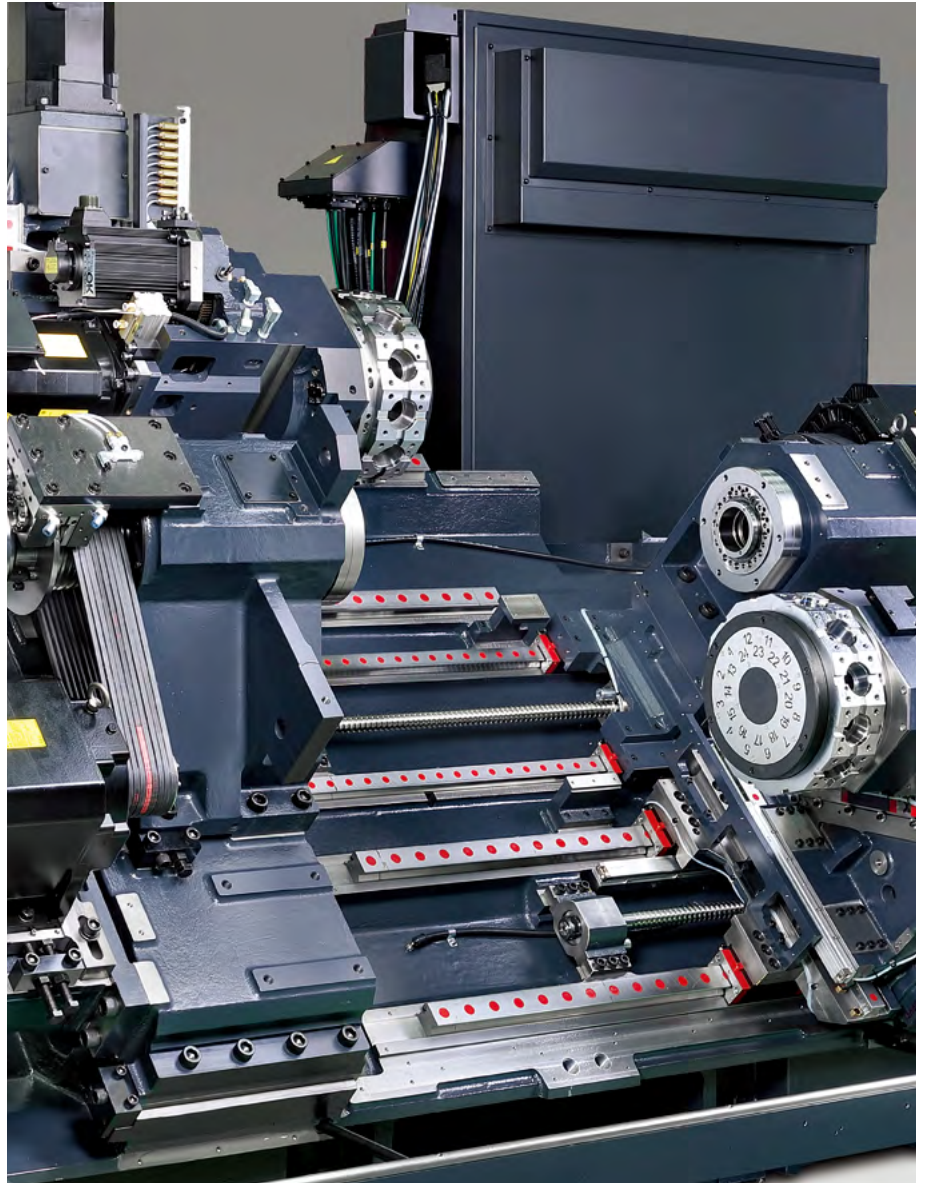

## C-axis accuracy

The positioning and repeatability of the C-axis has been enhanced.

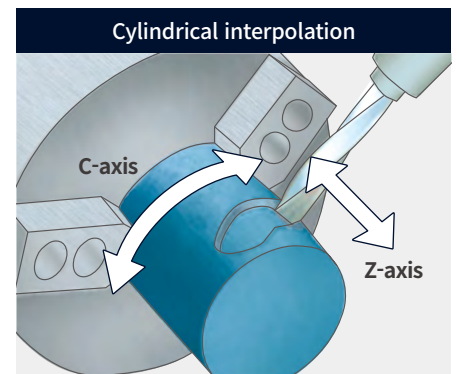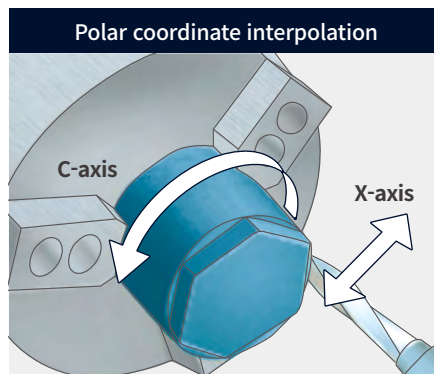

# TURRETS

Featuring stronger and faster turrets; upgraded servo motors for faster and more accurate tool rotation; and a stabilized structure for higher productivity and heavier-cutting capabilities.

## Turret with upgraded speed and rigidity

The newly-designed turret has passed stricter speed and side loading tests. In addition, the cross-roller bearing reduces backlash and improves accuracy due to its improved rigidity. Indexing time has been reduced by 20- 30% compared with previous models.

**Turret indexing time** (1-face)

**0.12** seconds

**Number of tool stations**


(same for upper and lower turrets)

**12** station

**Number of index positions**

(same for upper and lower turrets)


**24** index position

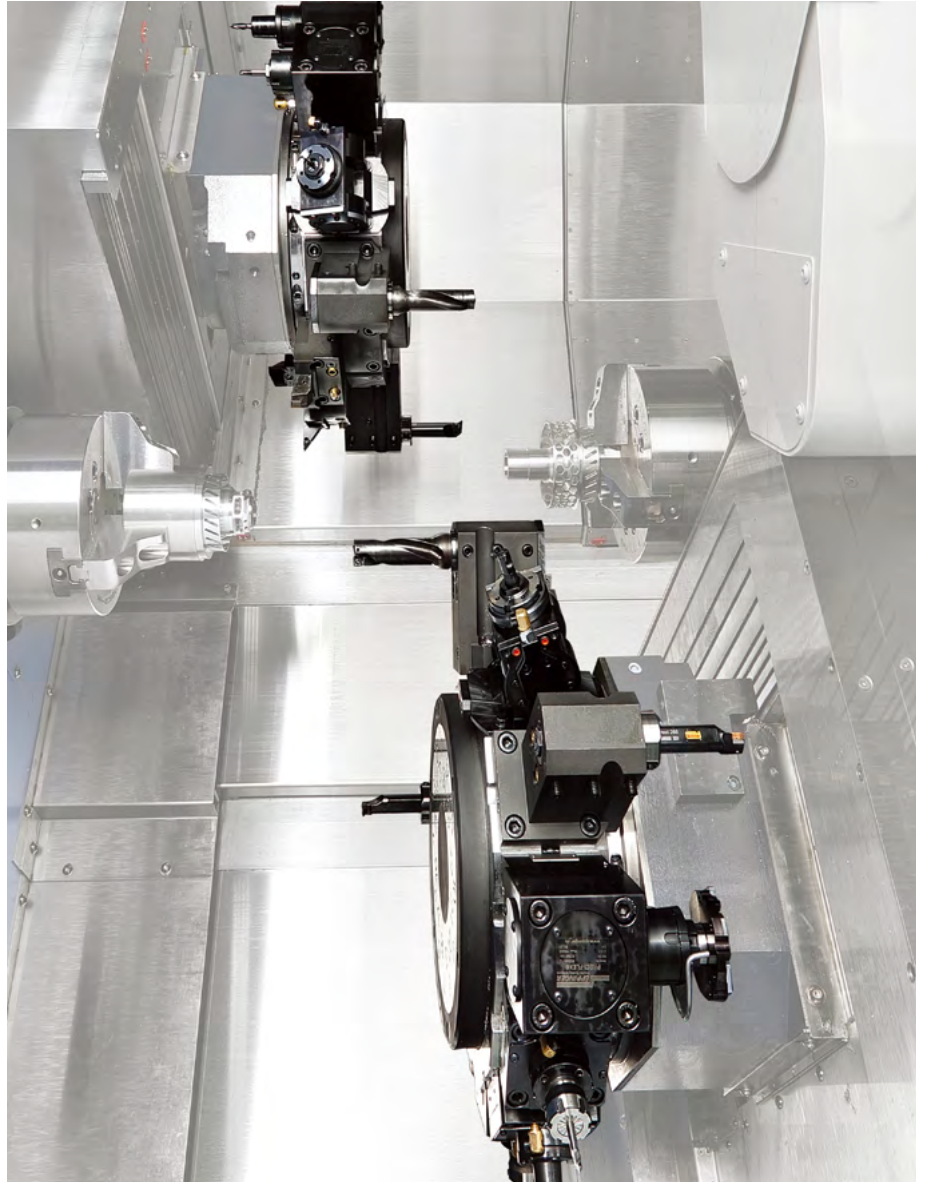

## Rotary tool structure is highly resistant to thermal displacement

The milling turret, including rotary tools, features a BMT design for higher rigidity. In addition, the minimization of thermal error due to oil and air lubrication of the rotary tools delivers class-leading milling, drilling and tapping performance.

- Reduce non-cutting time by 10%
- Higher indexing speeds
- Improved accuracy

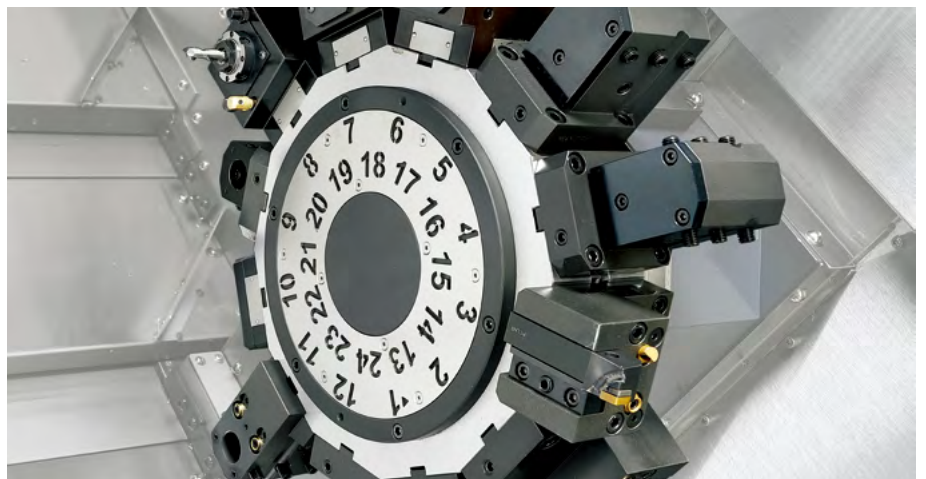


# CUTTING CONCEPTS


Multi-tasking with left and right spindles and upper and lower turrets optimizes productivity.

## “LONG SHAFT MACHINING BY SYNCHRONISING THE ROTATION OF BOTH SPINDLES” CONCEPT

PUMA TT Series turning centers can double productivity when machining long workpieces through the synchronized control of the left and right spindles and using both the upper and lower turrets for simultaneous machining.

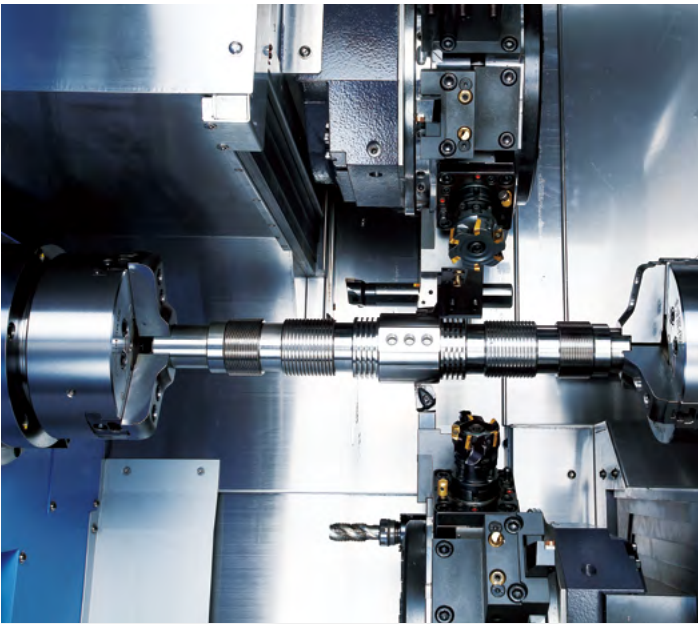


Turning at the same position is carried out using the upper and lower turrets simultaneously.

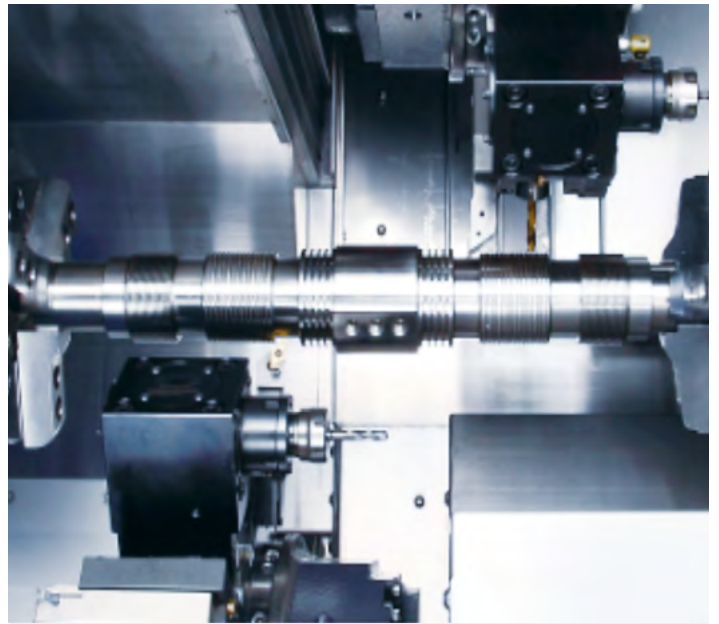


Different cutting processes can be carried out on a single workpiece using the upper and lower turrets simultaneously.

## “ONE MACHINE, TWO PARTS” CONCEPT

PUMA TT Series turning centers double productivity thanks to the independent, yet simultaneous, operation of the left and right spindles and the upper and lower turrets.

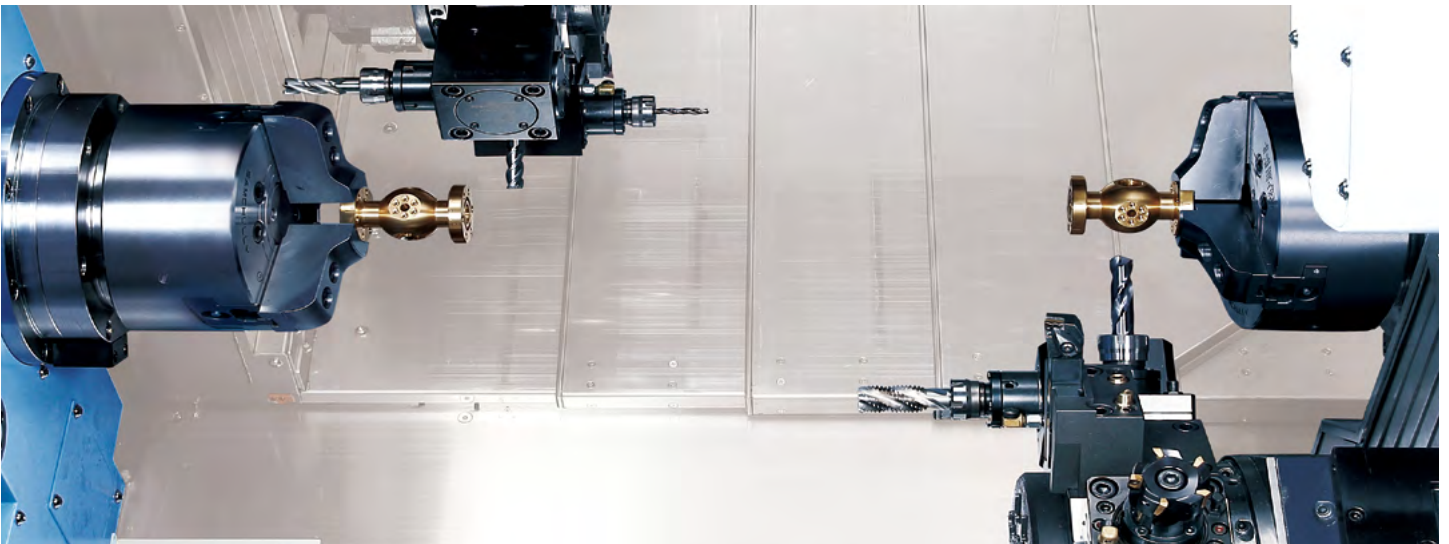


# CUTTING CONCEPTS

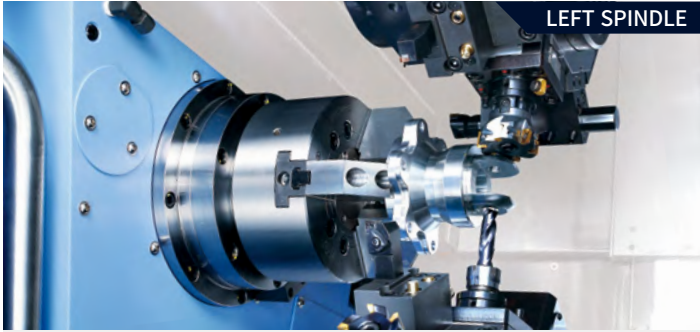


LEFT SPINDLE

Upper and lower turret simultaneously machining with left spindle

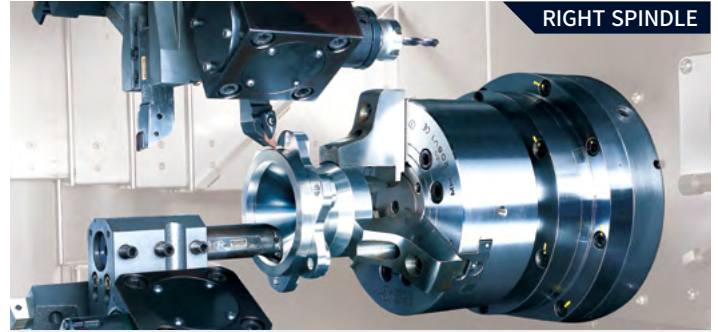


RIGHT SPINDLE

Upper and lower turret simultaneously machining with right spindle

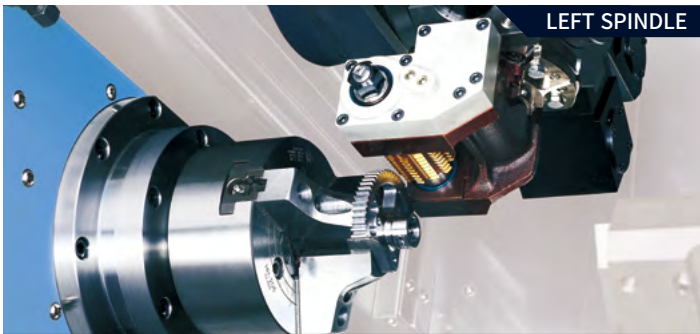

LEFT SPINDLE

Gear hobbing and polygon turning

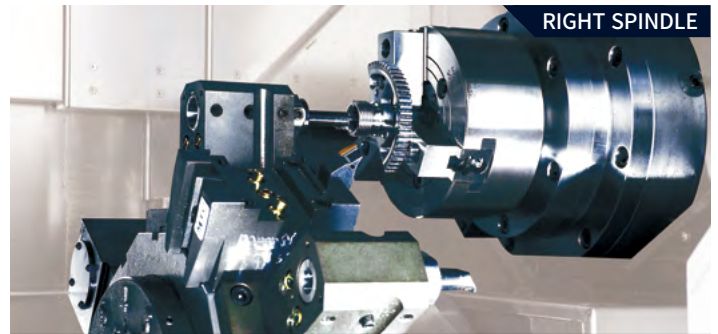


RIGHT SPINDLE

Internal slotting operation


## “FIRST AND SECOND PROCESS SIMULTANEOUS MACHINING” CONCEPT

The PUMA TT can produce different milled features using its spindles. Example: bolt hole pattern using the right spindle to a keyway machined feature using the left spindle.

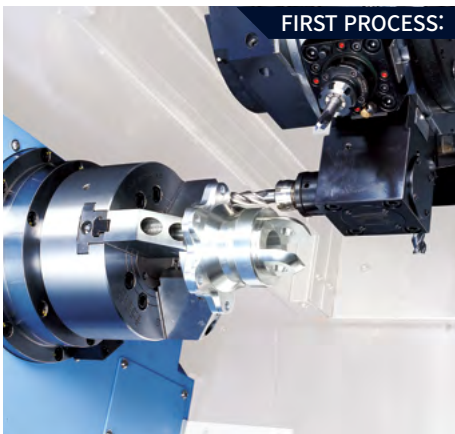


FIRST PROCESS:

Cutting with the left spindle

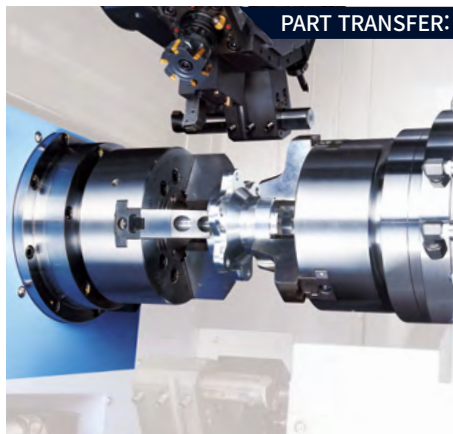

PART TRANSFER:

Synchronized rotation and parts feed using the left and right spindles

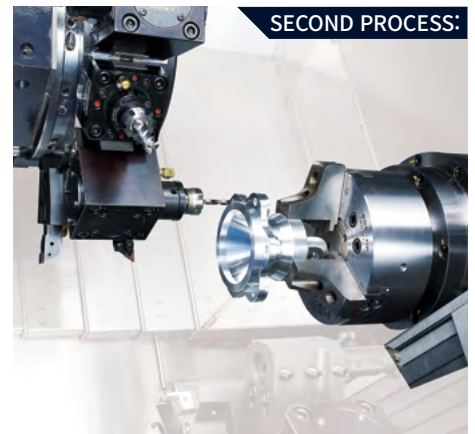

SECOND PROCESS:

Rear side cutting with the right spindle


# ONE MACHINE, TWO PROCESSES

With the adoption of two opposing spindles and upper/lower turrets, the PUMA TT Series can machine both first and second operations simultaneously. Furthermore, the axis travel system, which features high rigidity roller LM guideways and a fast feed rate of 40 m/min, provides speed with process reliability.



## DIVERSE LINE-UP WITH LARGE CAPABILITY

Rotary tools can be selected for milling, tapping and drilling, while the Y-axis can be used for cutting inclined or curved surfaces. This process-intensive turning center is capable of conducting multiple processes, further widening its potential and appeal.

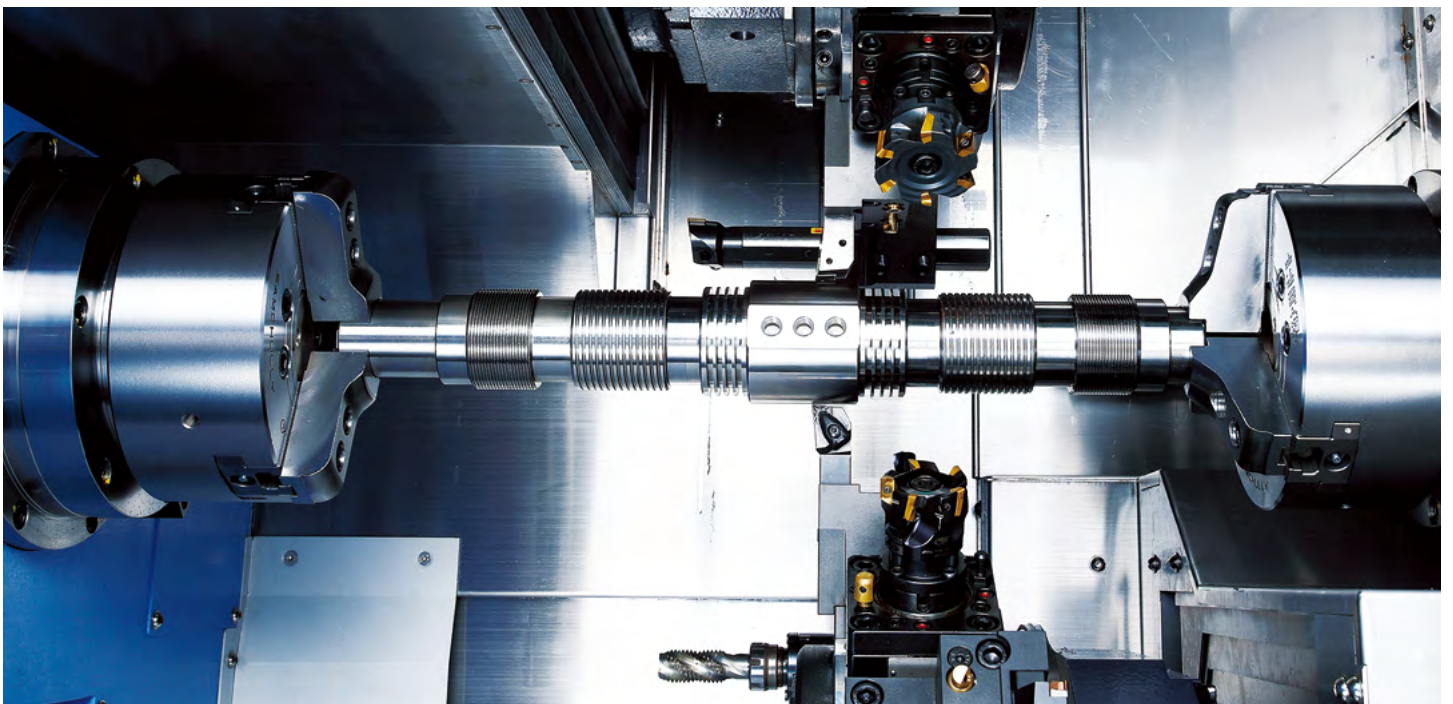

# STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Features	PUMA TT1300SY/SYY	PUMA TT1300SYB/SYYB	PUMA TT2100SYY	PUMA TT2100SYB
<b>Chuck (Left)</b>	135 mm (5 inch)	●	X	X	X
	165 mm (6 inch / TT1300SYB: 170 mm)	○	●	X	X
	210 mm (8 inch)	X	X	●	X
	254 mm (10 inch)	X	X	X	●
	None	○	○	○	○
<b>Chuck (Right)</b>	135 mm (5 inch)	●	●	X	X
	165 mm (6 inch)	○	○	X	X
	210 mm (8 inch)	X	X	●	●
	254 mm (10 inch)	X	X	X	X
	None	○	○	○	○
<b>Jaws (Left / Right)</b>	Soft jaws	●	●	●	●
	Hardened & ground hard jaws	○	○	○	○
<b>Chucking option</b>	Dual pressure chucking	○	○	○	○
	Chuck clamp confirmation	○	○	○	○
<b>Tailstock</b>	Tail center for turret	○	○	○	○
<b>Coolant pump (60 / 50Hz)</b>	4.5 Bar	●	●	●	●
	Power up(7/10/14.5/20 Bar)	○	○	○	○
<b>Coolant options</b>	Oil skimmer	○	○	○	○
	Coolant pressure switch	○	○	○	○
	Coolant level switch : Sensing level - low	○	○	○	○
	Cooling flow switch	○	○	○	○
	High coolant interface	○	○	○	○
	Chuck coolant (Left/Right)	○	○	○	○
	TSC for spindle (Left/Right)	○	○	○	○
	Coolant gun	○	○	○	○
<b>Chip processing options</b>	Chip conveyor_Side Type	○	○	○	○
	Chip conveyor_Rare Type	○	○	○	○
	Chip bucket	○	○	○	○
	Air blow (Left/Right)	○	○	○	○
	Mist collector	○	○	○	○
<b>Precision enhanced option</b>	Thermal compensation function (sensor type)	○	○	○	○
	Water soluble Coolant Chiller**	○	○	○	○
	Linear scale (X1,X2,Z1,Z2,Y1,Y2)	○	○	○	○
<b>Measurement &amp; automation</b>	Tool setter(Automatic)	○	○	○	○
	Parts catcher and box	○	○	○	○
	Parts unloader and conveyor	○	○	○	○
	Work ejector	○	○	○	○
	Parts unloader operating while main spindle cutting(Real time customer macro)	○	○	○	○
	Auto door	○	○	○	○
	Cut-Off confirmation	○	○	○	○
	Work/Tool counter	○	○	○	○
	Robot interface (PMC I/O, Profibus)	○	○	○	○
	Bar feeder interface	○	○	○	○
Bar puller	○	○	○	○	
<b>Optional devices</b>	CBS II	○	○	○	○
	Tool load monitoring	○	○	○	○
	Signal tower	○	○	○	○
	Air gun	○	○	○	○
	Air conditioner for electric cabinet	○	○	○	○
	Light for electric cabinet	○	○	○	○
	Extra M-code (4ea)	○	○	○	○
	Auto power Off	○	○	○	○
Quick change tooling(CAPTO)	○	○	○	○	

\* Please contact your DN Solutions representative for detailed machine information.

\* When using a semi-synthetic type or synthetic type, contact our sales representative or service center in advance.




\*\* Technical consultation is mandatory for the chilling of non-water soluble coolant

● Standard ○ Optional X Not applicable

# PERIPHERAL EQUIPMENT


## Chip conveyor (right side) OPTION

The chip conveyor with its stable design delivers excellent chip disposal, superior operation and maintenance convenience. Users can select the optimum type of conveyor that meets their specific machining and floor space requirements.

Name	Hinged belt	Magnetic scrapper	Drum filter (Single type)
Application	Steel	Cast steel, iron	Steel, cast, nonferrous metals
Features	<ul style="list-style-type: none"> <li>• General use</li> <li>• Suitable for steel applications producing 30mm chips or longer</li> </ul>	<ul style="list-style-type: none"> <li>• Easy-to-understand manual</li> <li>• Chips are scraped up and discharged</li> </ul>	<ul style="list-style-type: none"> <li>• Suitable for long and short chips</li> <li>• Cooling water filtering function</li> </ul>
Shape			

## Coolant chiller (recommended) OPTION

Coolant chiller is highly recommended to prevent temperature rise and minimize thermal deformation, when using a water-insoluble coolant or high-pressure coolant system of which the power is over 1.5 kw.

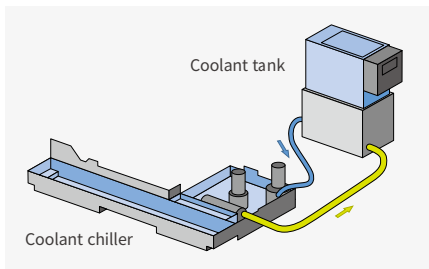

## 70 bar high pressure coolant OPTION

70 bar high pressure coolant suitable for high productivity.



## Quick change capto OPTION

The Quick-Change tool system simplifies tool change operations. Recommended for users who need to change tools frequently or who need to reduce set-up times.



## Optional equipment

### Auto tool setter




### Coolant blower




### Signal tower



### Collet chuck

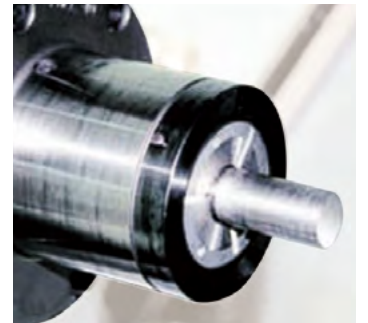


### ID/OD special holder (each turret 12ea/tool 24ea)





### Milling special holder (each turret 12ea/tool 24ea)



### Work ejector

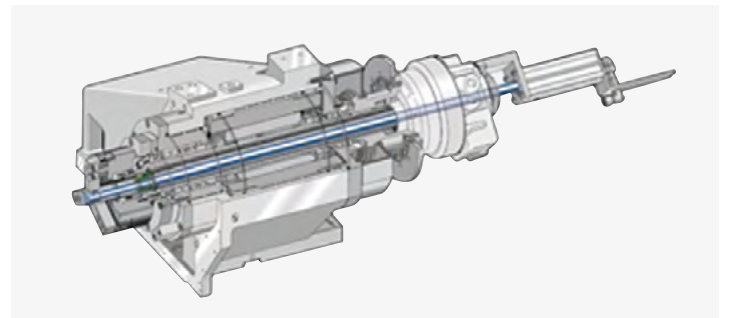


# PERIPHERAL EQUIPMENT

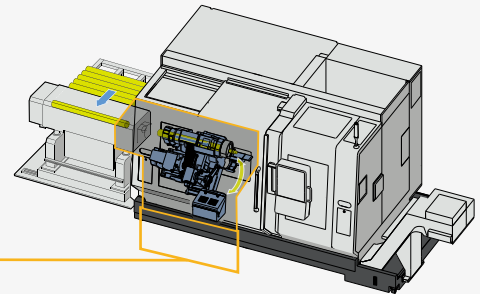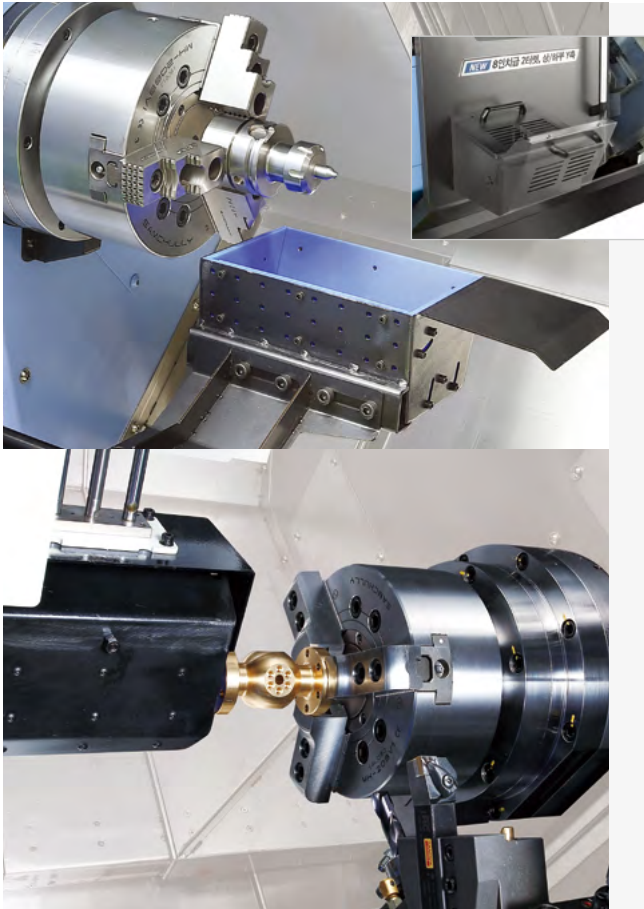

## Left spindle parts catcher OPTION

Single operation parts produced on the left spindle, or bar remnants can be ejected into the bucket.

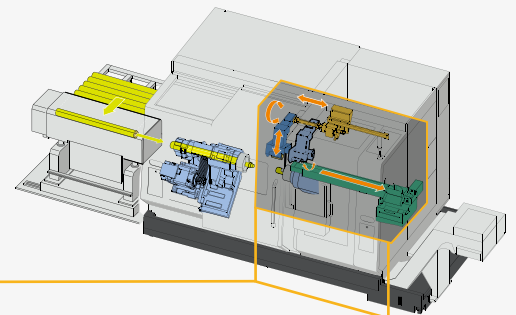

## Right spindle parts unloader and ejector OPTION

Work processed by the right spindle is delivered to the parts unloader by the work ejector and then discharged to the parts conveyor.

## Maximum material sizes for unloader / conveyor system

### Max. work diameter

PUMA TT 1300SY/SYY

**Ø51** mm (Ø2.0 inch)

PUMA TT 2100SY

**Ø65** mm (Ø2.6 inch)

### Max work length

PUMA TT 1300SY/SYY

**100** mm (3.9 inch)

PUMA TT 2100SY

**150** mm (5.9 inch)

### Max work weight

PUMA TT 1300SY/SYY

**1.6** kg (3.5 lb)

PUMA TT 2100SY

**3.5** kg (7.7 lb)



## Parts conveyor OPTION

Finished workpieces are transferred to the indexable output belt conveyor which discharges them to a receiving container.

# DN SOLUTIONS FANUC i PLUS

DN Solutions Fanuc i Plus maximizes customer productivity and convenience.

## 15" Screen + New OP

DN Solutions Fanuc i Plus' operation panel enhances operating convenience by incorporating common-design buttons and layout. It features a Qwerty keyboard for fast and easy data input and operation.

## DN Solutions Fanuc i Plus

- 15-inch color display
- Intuitive and user-friendly design

## USB and PCMCIA card QWERTY keyboard

- EZ-Guide i standard
- Ergonomic operator panel
- 2MB Memory
- Hot keys



## iHMI touchscreen

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.


## Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.



## Real-time custom macro function OPTION

During operation of the parts unloader of the right spindle, this function allows the lower turret to conduct the cutting operation for the left spindle. This function also further improves the productivity.

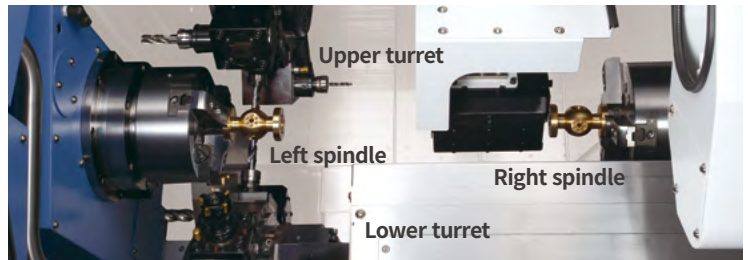

## NUMERIC CONTROL SPECIFICATIONS



Division	Item	Specifications	SY	SY
			DN Solutions Fanuc i Plus	DN Solutions Fanuc i Plus
Controlled axis	Controlled axes		8 (X1,Z1,C1,Y,X2,Z2,C2,A)	9 (X1,Z1,C1,Y1,X2,Z2,C2,Y2,A)
	Simultaneously controlled axes		4 axes (each path)	4 axes (each path)
Data input/output	Fast data server		○	○
	Memory card input/output		●	●
	USB memory input/output		●	●
	Large capacity memory(2GB)	Fanuc iPlus iHMI 적용시 선택 가능	○	○
Interface function	Embedded ethernet		●	●
	Fast Ethernet		○	○
	Enhanced embedded ethernet function		●	●
Operation	DNC operation	Included in RS232C interface.	●	●
	DNC operation with memory card		●	●
Program input	Workpiece coordinate system	G52 - G59	●	●
Feed function	AI contour control I	G5.1 Q_, 40 Blocks	●	●
	AI contour control II	G5.1 Q_, 200 Blocks	○	○
Operation guidance function	EZ Guidei (Conversational programming solution)		●	●
	iHMI with machining cycle	Note *1) Only with 15" touch LCD standard	○ <sup>*1)</sup>	○ <sup>*1)</sup>
	Multi path function	Supporting 2 or 3 path machine	●	●
	EZ Operation package		●	●
Setting and display	CNC screen dual display function		●	●
Network	FANUC MTConnect		⊕	⊕
	FANUC OPC UA		⊕	⊕
Others	Display unit	15" color LCD	●	●
		15" color LCD with touch panel	○	○
	Part program storage size & Number of registerable programs	1280M(512KB)_1000 programs	X	X
		5120M(2MB)_1000 programs	●	●

# DN SOLUTIONS FANUC i PLUS

## EZ-Guide i

Using the DN Solutions EZ-Guide i, users can create a cutting program for any desired shape, including patterns, by entering just the dimensions.

### CBS, Chip Breaking Solution II


The servo axis vibrates in the direction of processing operations thereby improving chip control and preventing chip curling, and ensuring process stability, material transfer etc.

### Comparison of results between regular turning operations and CBS II machining


\*Only provided to chuck size 8 inch and under.



### Example programming : Cutting shape

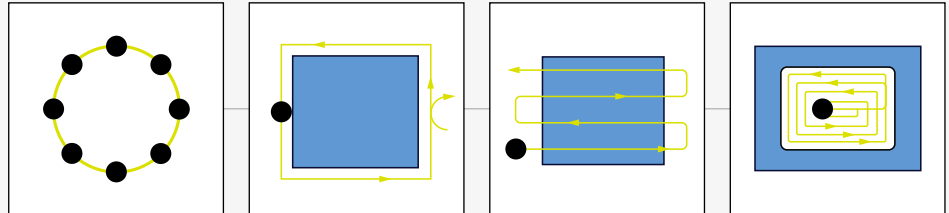

### Example part



### Automatic creation of cutting program

```
O7000 (SAMPLE PROGRAM) ;
...
M3 S1500 ;
G0 X50. Y125. ;
G0 Z30. ;
G1040 T0.5 J3. H0.2 K0.5 ... ;
G1020 H120. V50. U37. W68. ... ;
G0 Z80. ;
M5 ;
```

A cutting program is automatically created with the entered values.

### EZ-Guide i screen



Enter the dimensions of the shape

## EZ work

DN Solutions's EZ work supports the user with functions relating to tool data, error diagnostics, set up and machine monitoring.

### Tool monitoring screen



### Tool load monitoring function

During cutting operation, abnormal load caused by wear or damage of the tool is detected and an alarm is triggered to prevent further damage.

### Parts unloader maintenance and service screen



### Convenience of maintenance and service

The condition and service procedures of the sensors are provided for easy maintenance and servicing of major units.

### Q-setter Automatic measurement



### Convenient set up for peripheral equipment

Helps tool setter guide, work setting, tailstock setting, and other measurement and parameter control to reduce setting-up time and facilitates operation.



### Crash avoid check

Set the interference area between turret and sub spindle to avoid collision.



### Tool management

# CONVENIENT OPERATION

## SIEMENS SINUMERIK ONE


### 21.5 inch display + New OP

Two path programs are displayed simultaneously in the large 21.5-inch screen for enhanced user convenience.


- 21.5-inch display
- 6GB user memory
- USB (standard)
- QWERTY keyboard



### Conversational convenient function




**Cutting and operation support function**  
This function shows a cutting and tool path simulation in real-time.



Shop-turn mode  
[various]  
↓  
[attachments]

The automation elements (parts catcher, parts unloader etc.), can be easily controlled via interactive screens.




[Custom]  
↓  
[Protection zones]

**Operation safety function**  
Protection Zone Synchronized Actions checks the interference between the turret and the spindle to prevent collisions caused by operator error.



[offset]  
↓  
[operating parameter]  
↓  
[TC service]

**Maintenance and service convenience function**  
Maintenance and service of major equipment and peripheral devices, including the timer and parts counter settings can be easily undertaken.



[various]  
↓  
[attachment]  
↓  
[DSSV]

**Machining accuracy improvement**  
The NC controls spindle speed at an optimal level for precision threading and turning, making it possible to automatically improve surface roughness.



Before applying the function  
After applying the function

## NUMERIC CONTROL SPECIFICATIONS

SIEMENS


Division	Item	Specifications	SY			
			S828D	SONE	S828D	SONE
Controlled axis	Controlled axes		X1,Z1,C1,X2,Z2,C2,Z3,C3,C4	X1,Z1,C1,X2,Z2,C2,Z3,C3,C4	X1,Z1,C1,X2,Z2,C2,Z3,C3,C4	X1,Z1,C1,X2,Z2,C2,Z3,C3,C4
	Simultaneously controlled axes		4 axes	4 axes	4 axes	4 axes
Data input/output	Memory card input/output		X	X	X	X
	USB memory input/output		●	●	●	●
Interface function	Ethernet	(X130)	○	●	○	●
Operation	On network drive	(without EES option, Extcall)	○	●	○	●
	On USB storage medium, e.g. memory stick	(without EES option, Extcall)	●	●	●	●
Program input	Workpiece coordinate system	G54 - G59, G507 - G599	●	●	●	●
	Advanced surface		X	●	X	●
Feed function	Top surface		X	X	X	X
	Look ahead number of block		1	1000	1	1000
Programming & Editing function	3D simulation, finished part		●	●	●	●
	Simultaneous recording		●	●	●	●
	DXF reader for PC integrated in SINUMERIK operate		○	○	○	○
Operation guidance function	Shopturn		●	●	●	●
	EZ operation package		●	●	●	●
Setting and display	Operation via a VNC viewer		●	●	●	●
	MTCConnect		⊕	⊕	⊕	⊕
Network	OPCUA		○	○	○	○
	Others					
Others	Display unit	15.6" color display with touch screen(SW4.9)	●	○	●	○
		21.5" color display with touch screen(SW4.9)	X	●	X	●
		CNC user memory 10 MB	●	●	●	●
		CNC user memory 100 MB	○	○	○	○
		CNC user memory 6GB	X	○	X	○
		CNC user memory 40GB (with PCU or IPC)	X	○	X	○
		CNC user memory without limit(Execution from external storage devices)(EES / Using by USB or Network)	○	○	○	○
	HMI user memory for CNC part program 6GB	X	●	X	●	

● Standard ○ Optional X N/A ⊕ Available

# POWER | TORQUE


## L/R Spindle

PUMA TT1300SY/SYY

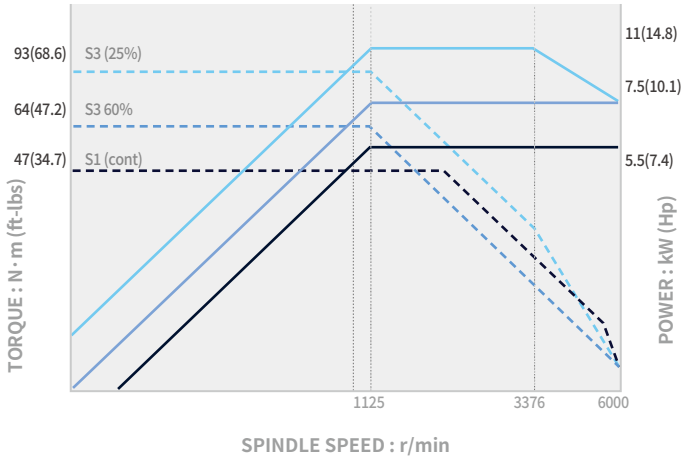


## L Spindle

PUMA TT1300SYYB

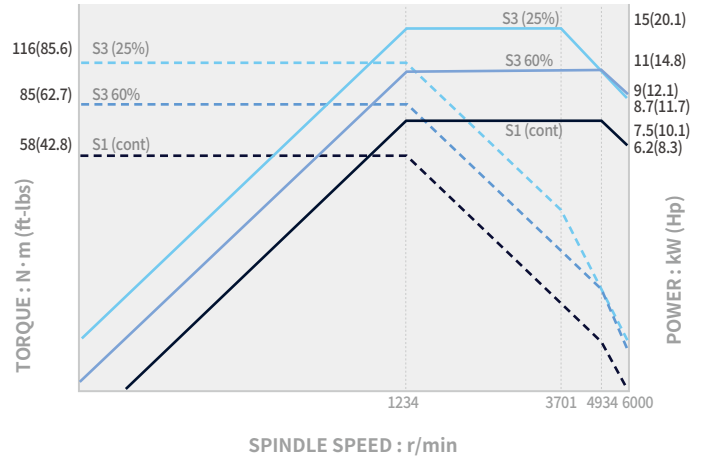


## L/R Spindle

PUMA TT2100SY

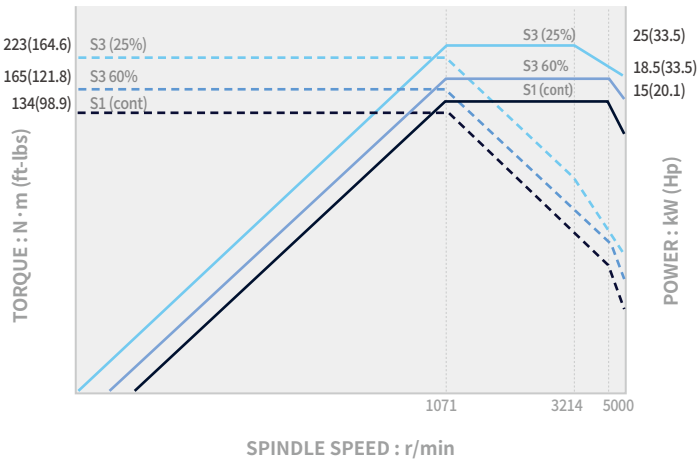


## L Spindle

PUMA TT2100SYYB

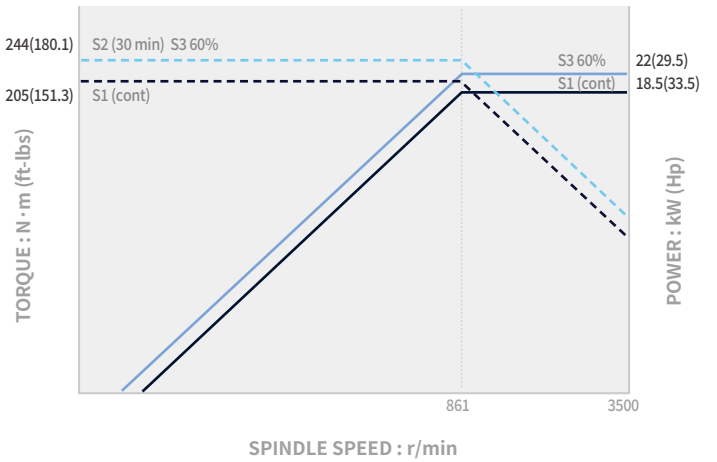


## Turret

PUMA TT 1300SY/SYY\_6000 r/min

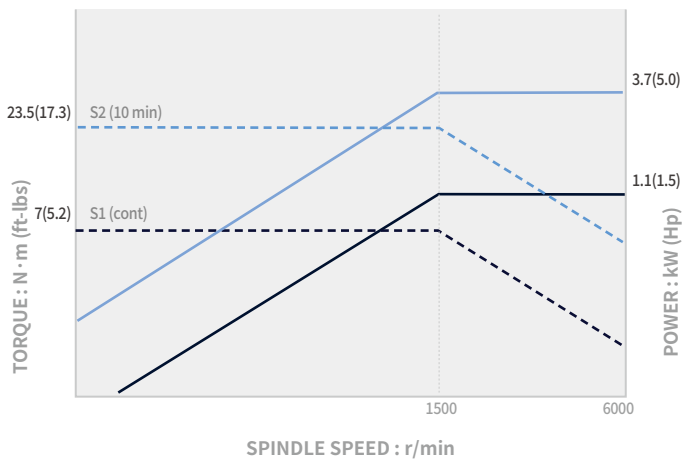

## BMT55P

PUMA TT2100SYY/SYYB\_6000 r/min

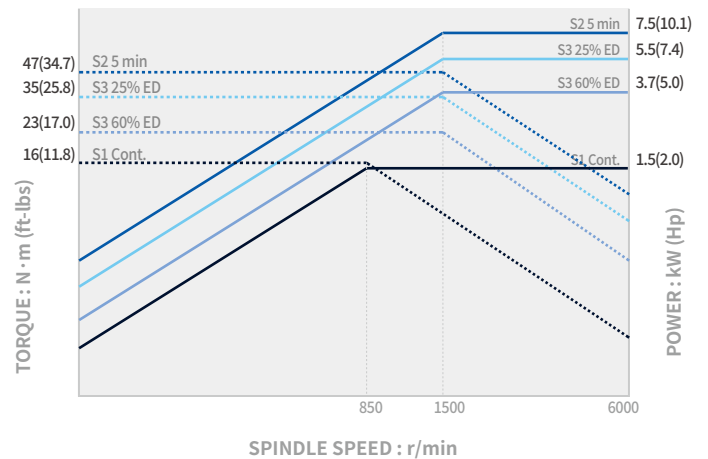




# EXTERNAL DIMENSIONS


## PUMA TT2100SY

Unit : mm (inch)

### FRONT

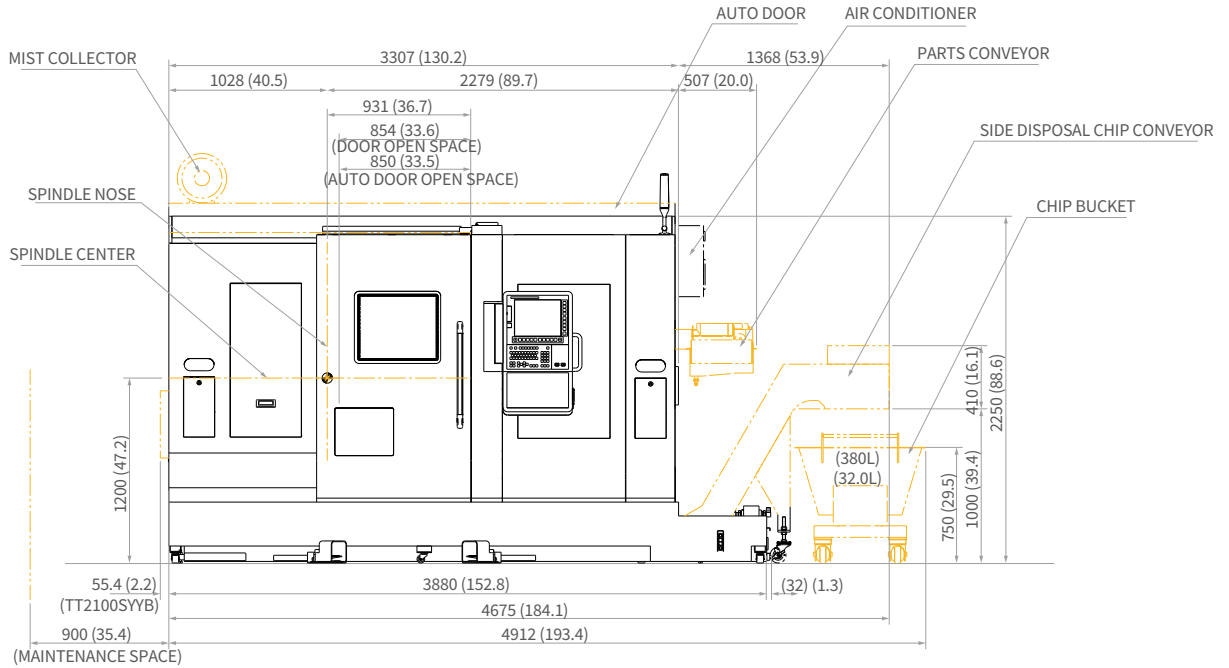


### SIDE

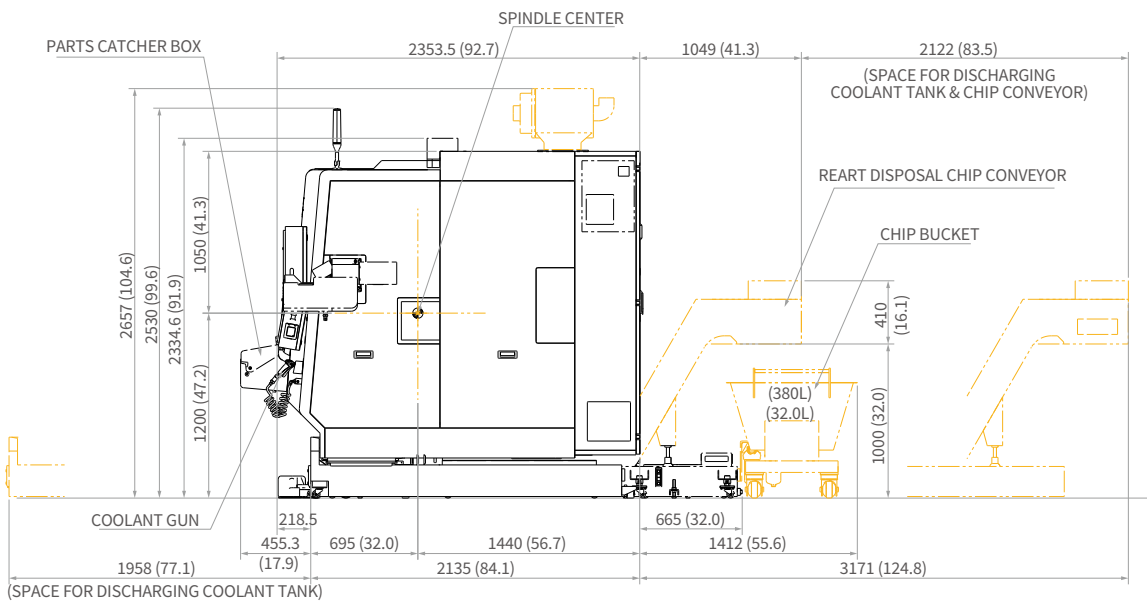

# TOOLING SYSTEM

PUMA TT1300SY


Unit : mm (inch)

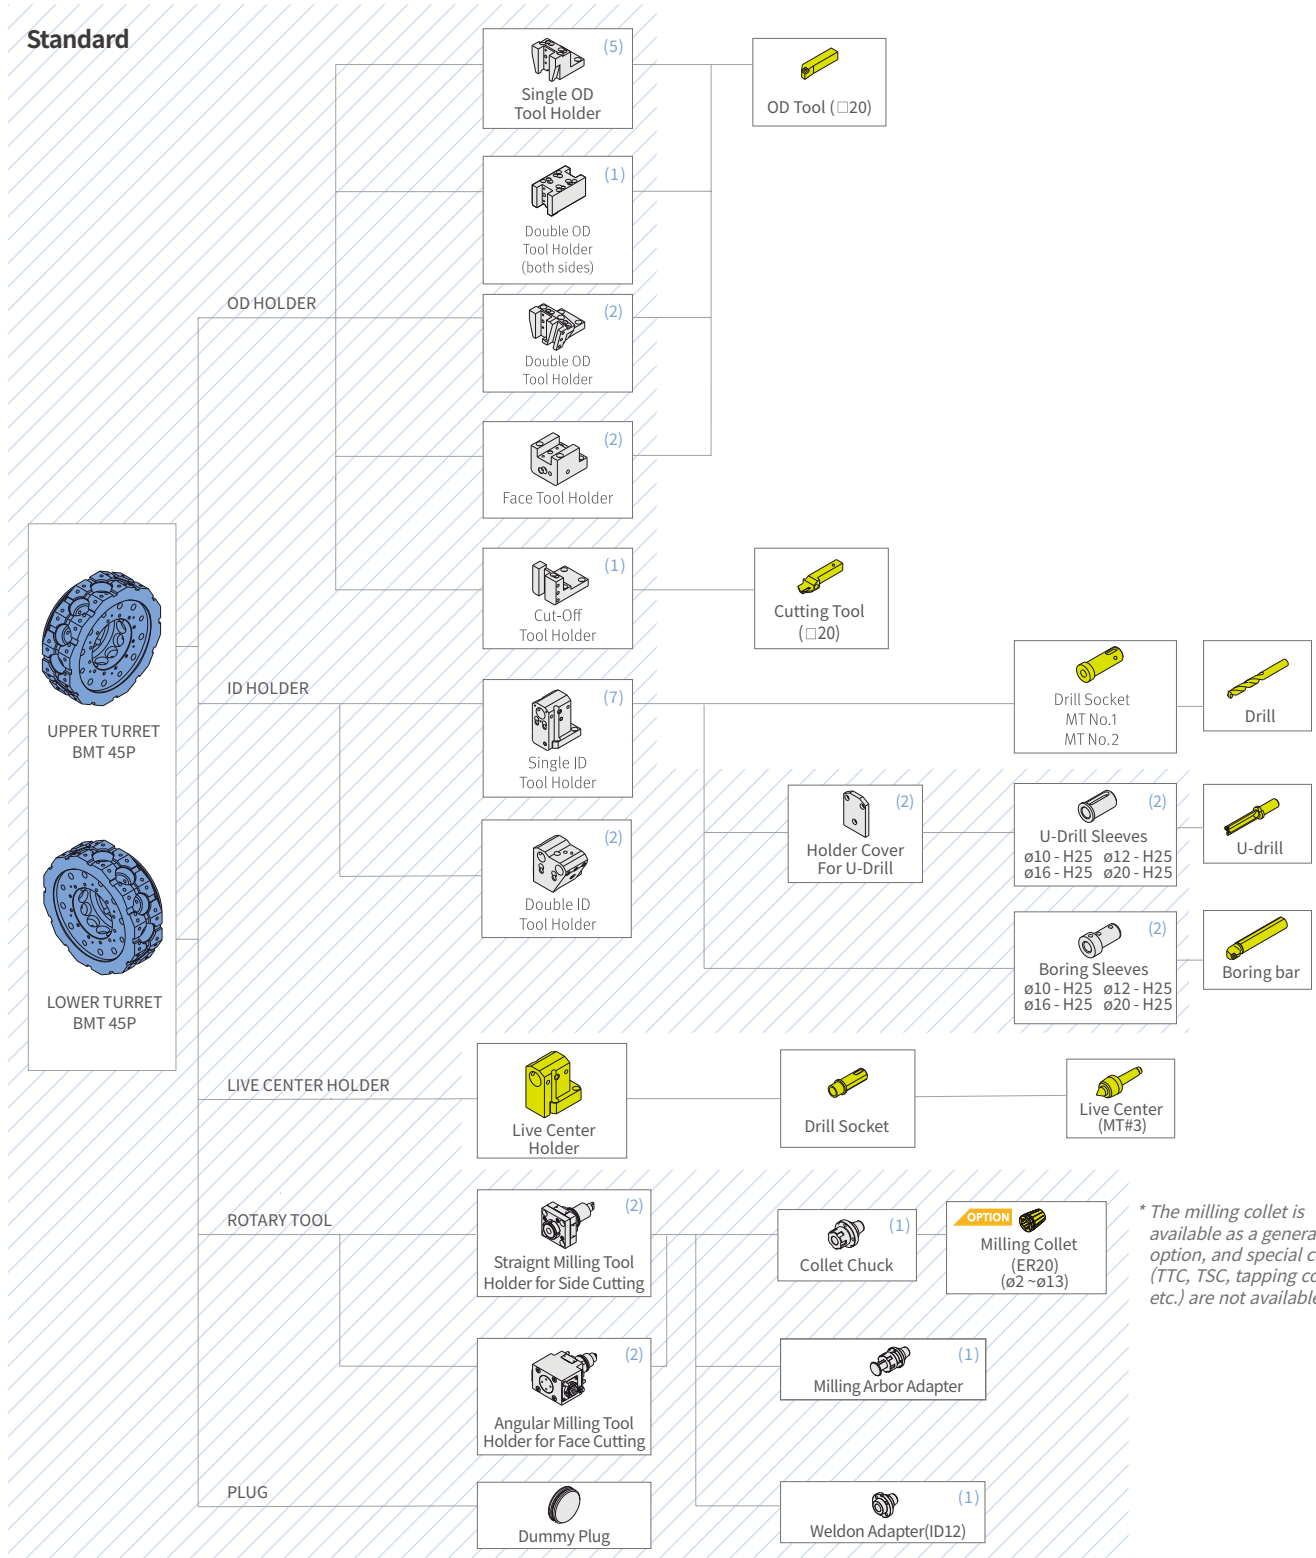

# TOOLING SYSTEM

PUMA TT2100SY

Unit : mm (inch)

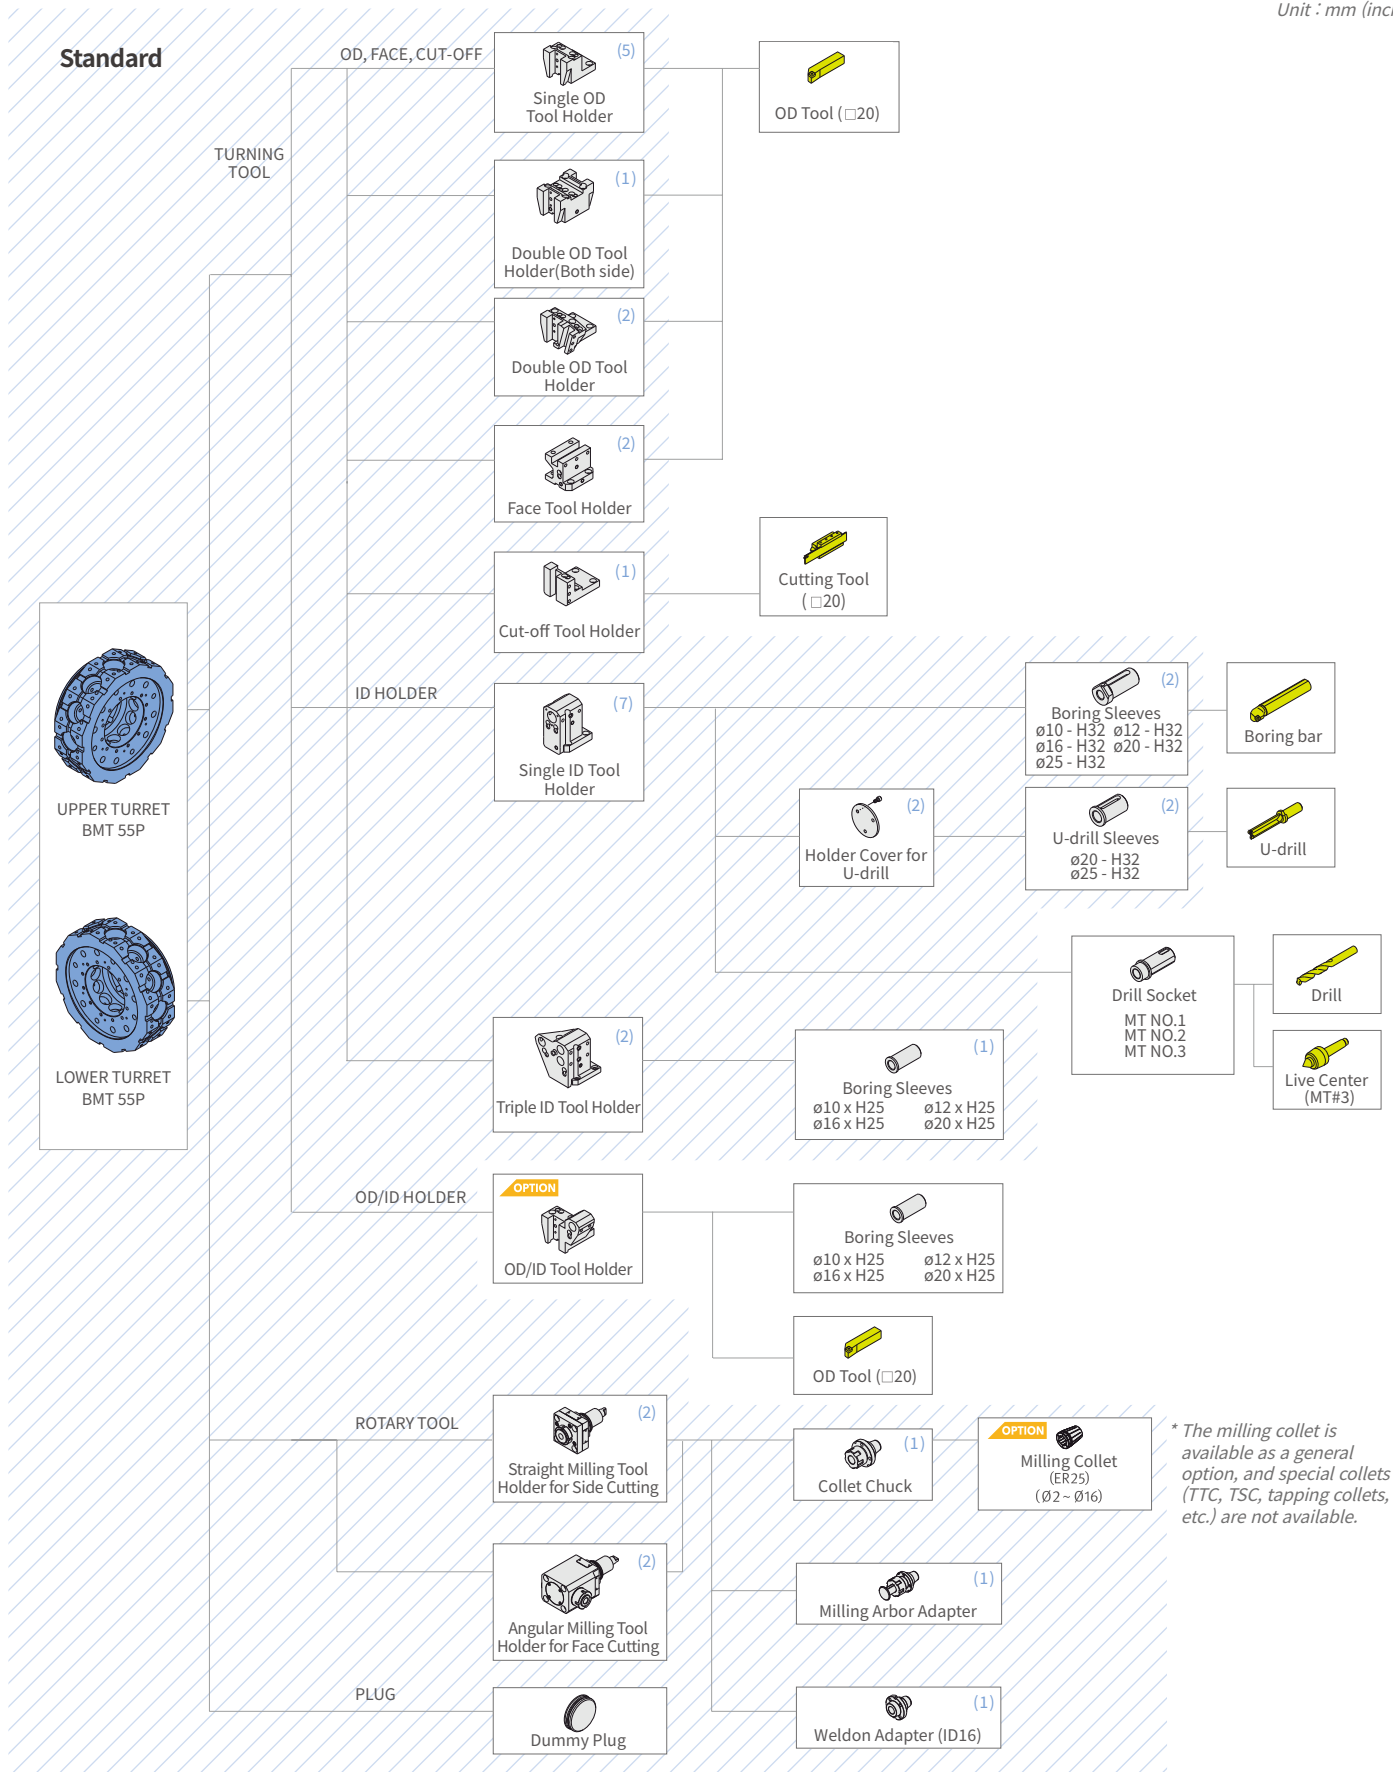

\* The milling collet is available as a general option, and special collets (TTC, TSC, tapping collets, etc.) are not available.












# WORKING RANGE

## PUMA TT2100SY

Unit : mm (inch)

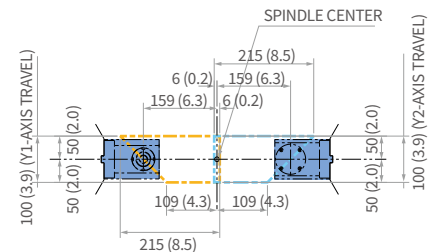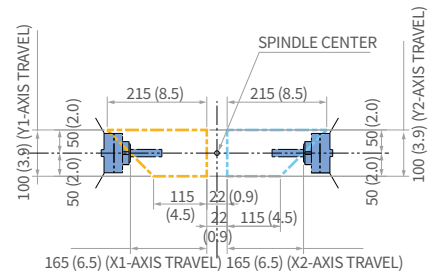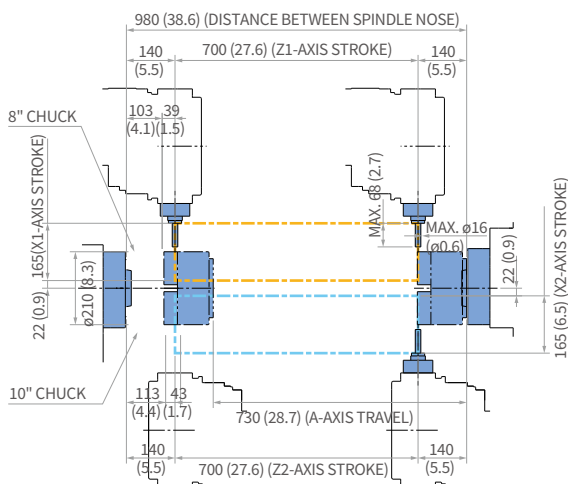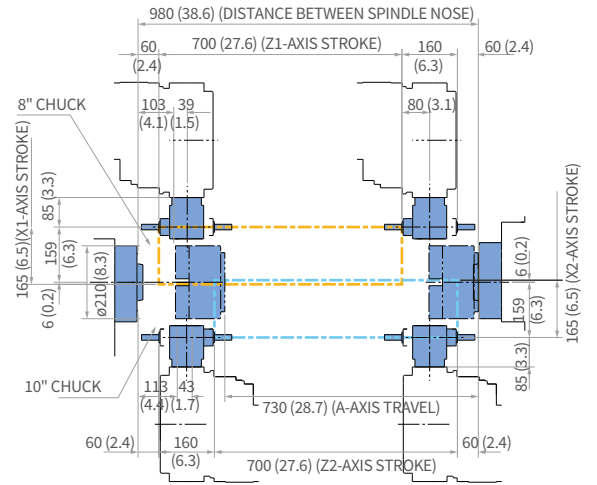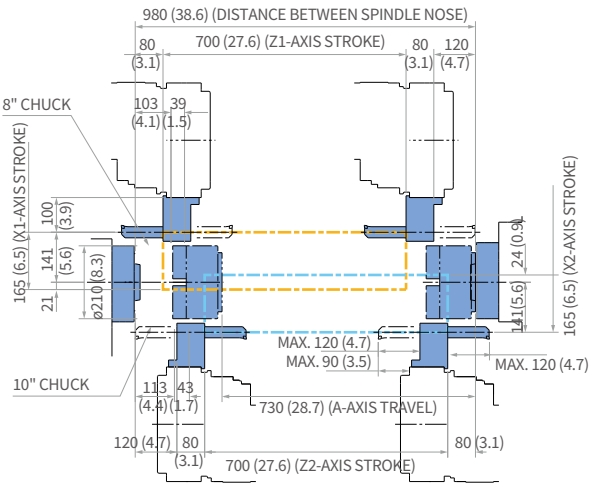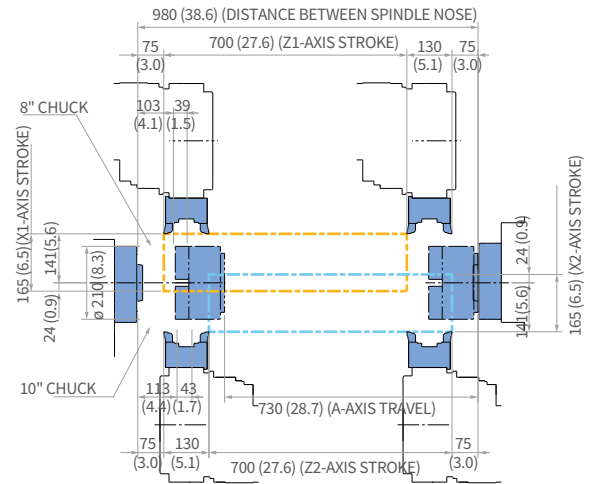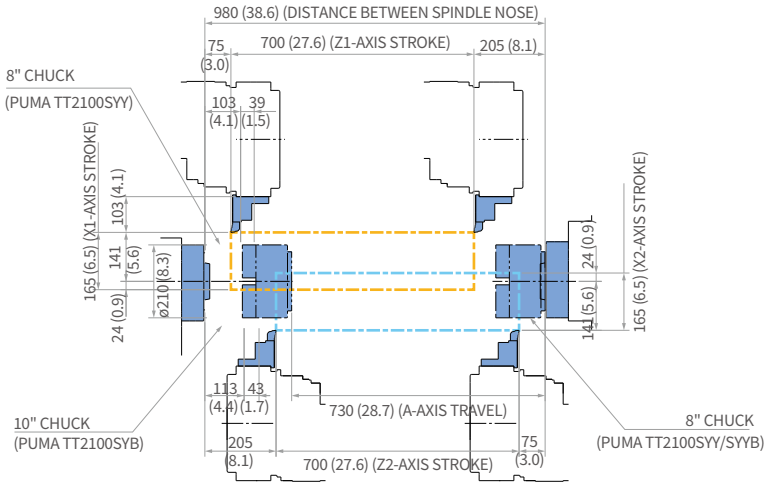

# MACHINE SPECIFICATIONS


## PUMA TT1300SY·2100SY

Description		Unit	PUMA TT1300SY/SY	PUMA TT1300SYB/ SYB	PUMA TT2100SY	PUMA TT2100SYB
Capacity	Swing over bed	mm (inch)	175 (6.9)		230 (9.1)	
	Swing over saddle	mm (inch)	175(6.9)		230 (9.1)	
	Recommended turning diameter	mm (inch)	135 (5.3)		210 (8.3)	
	Maximum turning diameter	mm (inch)	Upper turret: 175 (6.9) Lower turret: 175 (6.9)		Upper turret: 230 (9.1) Lower turret: 230 (9.1)	
	Maximum turning length	mm (inch)	120 (4.7)		230 (9.1)	
	Chuck size (left spindle)	inch	5/5	6/5	8/8	10/8
	Bar working diameter	mm (inch)	42/42 (1.7/1.7)	51/42 (2.0/1.7)	65/65 (2.6/2.6)	81/65 (3.2/2.6)
Travel	Travel distance	X1/X2-axis	TT 1300SY: 135/150 (5.3/5.9) PUMA TT1300SY: 135/135 (5.3/5.3)		165 (6.5)	
		Z1/X2-axis	530 (20.9)		700 (27.6)	
		Y-axis	80 (±40) (3.1 (±1.6))		100 (±50) (3.9 (±2.0))	
		A-axis	540 (21.3)		730 (28.7)	
Feedrates	Rapid traverse rate	X1/X2-axis	30 (1181.1)		30 (1181.1)	
		Z1/X2-axis	40 (1574.8)		40 (1574.8)	
		Y-axis	15 (590.6)		15 (590.6)	
		A-axis	40 (1574.8)		40 (1574.8)	
Left spindle	Maximum spindle speed	r/min	6000		5000	3500
	Maximum spindle power	kW (Hp)	11/7.5/5.5 (14.8/10.1/7.4) (S3 25%/S3 60%/cont.)	15/11/7.5 (20.1/14.8/10.1) (S3 25%/S3 60%/cont.)	25/18.5/15 (44.9/24.8/20.1) (S3 25%/S3 60%/cont.)	22/18.5 (44.9/24.8) (S3 60%/cont.)
	Maximum spindle torque	N·m (ft-lbs)	93 (68.6)	116 (85.6)	223 (164.6)	244 (180.1)
	Spindle nose	ASA	A2 #5		A2 #6	A2 #8
	Spindle bearing diameter (front)	mm (inch)	80 (3.1)	90 (3.5)	110 (4.3)	130 (5.1)
	Spindle through hole	mm (inch)	53 (2.1)	61 (2.4)	76 (3.0)	91 (3.6)
	Minimum spindle indexing angle (C-axis)	deg	0.001		0.001	
Right spindle	Maximum spindle speed	r/min	6000		5000	
	Maximum spindle power	kW (Hp)	11/7.5/5.5 (14.8/10.1/7.4) (S3 25%/S3 60%/continuous)		25/18.5/15 (44.9/24.8/20.1) (S3 25%/S3 60%/continuous)	
	Maximum spindle torque	N·m (ft-lbs)	93 (68.6)		223 (164.6)	
	Spindle nose	ASA	A2 #5		A2 #6	
	Spindle bearing diameter (front)	mm (inch)	80 (3.1)		110 (4.3)	
	Spindle through hole	mm (inch)	53 (2.1)		76 (3.0)	
	Minimum spindle indexing angle (C-axis)	deg	0.001		0.001	
Turret	Number of tool stations (upper+lower)	ea	24 + 24 position		24 + 24 position	
	Holder mount type	-	BMT45P		BMT55P	
	OD tool size	mm (inch)	20 x 20 (0.8 x 0.8)		20 x 20 (0.8 x 0.8)	
	Maximum boring bar size (main/sub)	mm (inch)	ø25 (ø1.0)		ø32 (ø1.3)	
	Turret indexing time (1 station swivel)	s	0.12		0.12	
	Maximum rotary tool speed	r/min	6000		6000	
	Maximum rotary tool speed power	kW (Hp)	3.7/1.1 (5.0/1.5) (S3 25%/continuous)		7.5/1.1 (10.1/1.5) (S2 5-min/continuous)	
	Maximum rotary tool speed torque	N·m (ft-lbs)	23.5 (17.3)		47.7 (35.2)	
Power source	Electric power supply (rated capacity)	kVA	49.68 / 50.17	51.68 / 52.17	69.40	72.90
Machine dimensions	Length	mm (inch)	3405 (134.1)	3510 (138.2)	3880 (152.8)	3940 (155.1)
	Width	mm (inch)	2300 (90.6)		2360 (92.9)	
	Height	mm (inch)	2070 (81.5)		2250 (88.6)	
	Weight	kg (lb)	8000 (17636.7)	8100 (17857.2)	9500 (20943.6)	9600 (21164.1)
CNC	NC system	DN Solutions Fanuc i Plus {Fanuc 31i}*				

# WHY Y-Axis?

## DOUBLE THE PRODUCTIVITY

Adding a single Y-axis to your machine allows for single-setup efficiency and a new level of accuracy. But if you add a dual Y-axis—as you can in the PUMA TT series—the productivity difference is so striking that you won't ever go back.

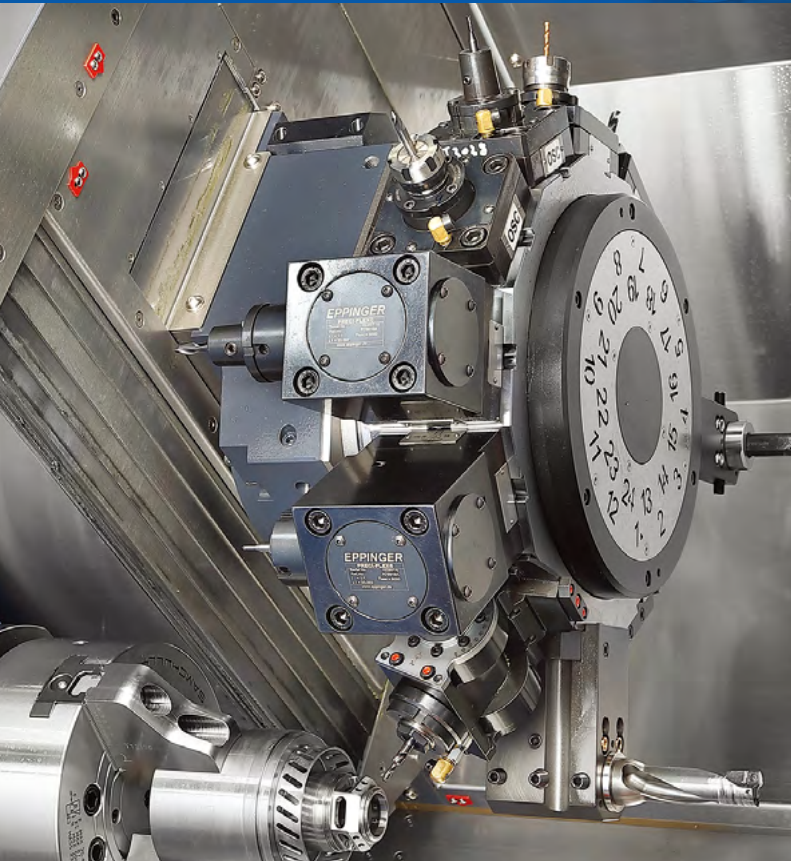

## DUAL POWER

The PUMA TT series doubles productivity with independently-operating left/right spindles and upper/lower turrets. What's more, the lower Y-axis increases productivity 20% more than having only an upper Y-axis. (PUMA TT1300/2100SY)

## MORE VERSATILITY

With a Y-axis (or, in the case of the PUMA TT, a dual Y-axis), machine shops are capable of a wide variety of multi-axis milling cycles. That means there's a greater potential for done-in-one parts.



# RESPONDING TO CUSTOMERS **ANYTIME, ANYWHERE**

## DN SOLUTIONS GLOBAL NETWORK

**66** COUNTRIES | **140** + SALES NETWORKS | **3** FACTORIES | **6** REGIONAL HQS



## CUSTOMER SUPPORT AND SERVICES

### WE'RE THERE FOR YOU WHENEVER YOU NEED US.

We help our customers operate at maximum efficiency by providing them with a range of tried, tested and trusted services - from pre-sales consultancy to post-sales support.



#### FIELD SERVICES

- On-site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair service



#### PARTS SUPPLY

- Supplying a wide range of original DN Solutions spare parts
- Parts repair service



#### TRAINING

- Programming, machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering



#### TECHNICAL SUPPORT

- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy



**Head Office**

19F, 10, Tongil-ro, Jung-gu Seoul,  
Republic of Korea, 04527  
Tel: +82-2-6972-0370/0350  
Fax: +82-2-6972-0400

**DN Solutions America**

19A Chapin Road,  
Pine Brook New Jersey 07058,  
United States  
Tel: +1-973-618-2500  
Fax: +1-973-618-2501

**DN Solutions Europe**

Emdener Strasse 24, D-41540  
Dormagen, Germany  
Tel: +49-2133-5067-100  
Fax: +49-2133-5067-111

**DN Solutions India**

No.82, Jakkuar Village  
Yelahanka Hobil,  
Bangalore-560064  
Tel: + 91-80-2205-6900  
E-mail: [india@dncompany.com](mailto:india@dncompany.com)

**DN Solutions China**

Room 101,201,301, Building 39 Xinzhuan Highway  
No.258 Songjiang District China Shanghai (201612)  
Tel: +86 21-5445-1155  
Fax: +86 21-6405-1472

**DN Solutions Vietnam**

M.O.R.E building 2F, 40A-40B Ut Tich Street, 04 Ward 04,  
District Tan Binh District, Ho Chi Minh City, Vietnam  
Tel: +84 28-7304-0163

**Sales inquiry**

[sales@dncompany.com](mailto:sales@dncompany.com)