


ADDITIVE MANUFACTURING SOLUTIONS

DLX

DLX 150

DLX 325

DLX 450

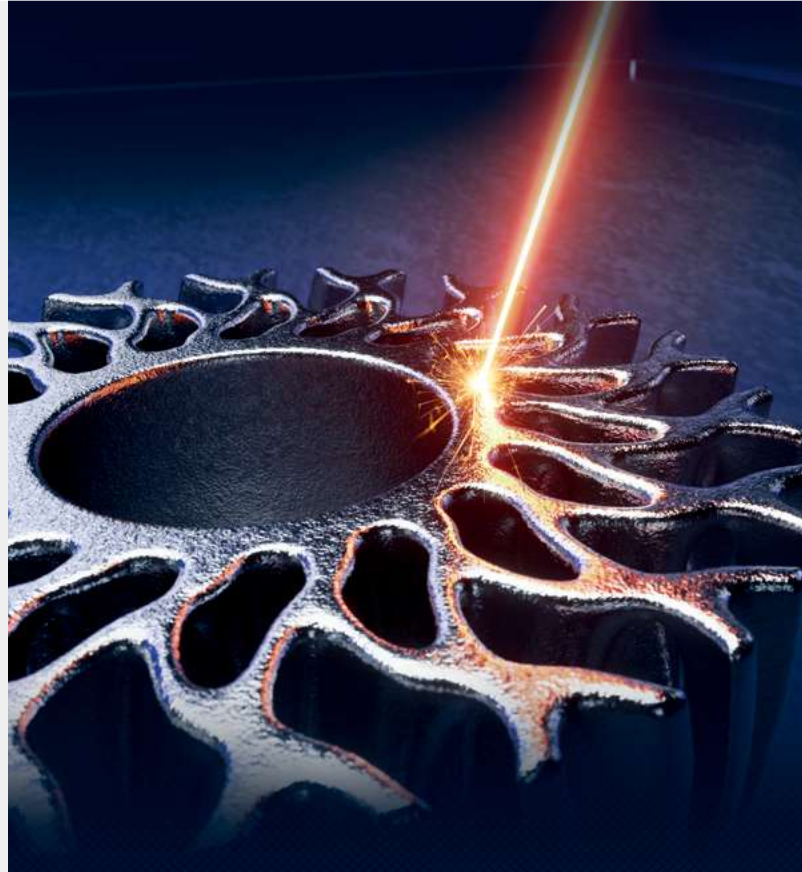

END TO END SOLUTION

SOLUTION

End-to-End solution from single source through Machine + Automation + Post Processing.


SOFTWARE

End-to-End software portfolio with 6 consistent products for every step of the process from a single source.

AMExplorer AMCosting AMSimulation

AMBuilder AMBuildSmart AMOptoMet

You step into a new world of manufacturing and we support you every step of the way with a comprehensive 360° solution offering.

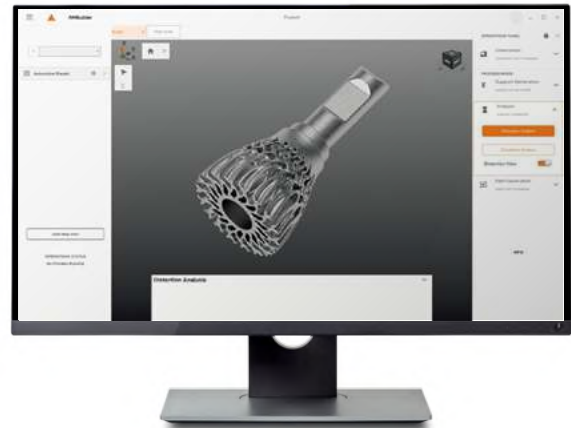

SERVICES

Enable R&D to identify / explore additive parts, redesign for additive manufacturing and support production ramp up.

SUPPORT

Additive Solution Centers (ASC) in all major regions as well as remote locations to support customers anywhere across the globe.



Additive Solution Centers (ASC) worldwide

SCALE

SPEED

Transitioning towards end to end single source solution provider.

360° OFFERING





*The future of
manufacturing
is hybrid.*

Wonjong Kim, CEO DN Solutions

7 ADVANTAGES OF ADDITIVE TECHNOLOGY

1**PART CONSOLIDATION**

Reduced assemblies
by part integration

2**DESIGN FREEDOM**


Conformal cooling channels impossible
to manufacture subtractively

3**LIGHTWEIGHT DESIGN**

Reduce tooling wear and
optimize use of material

4**FUNCTIONAL
INTEGRATION**

Lattice Structures

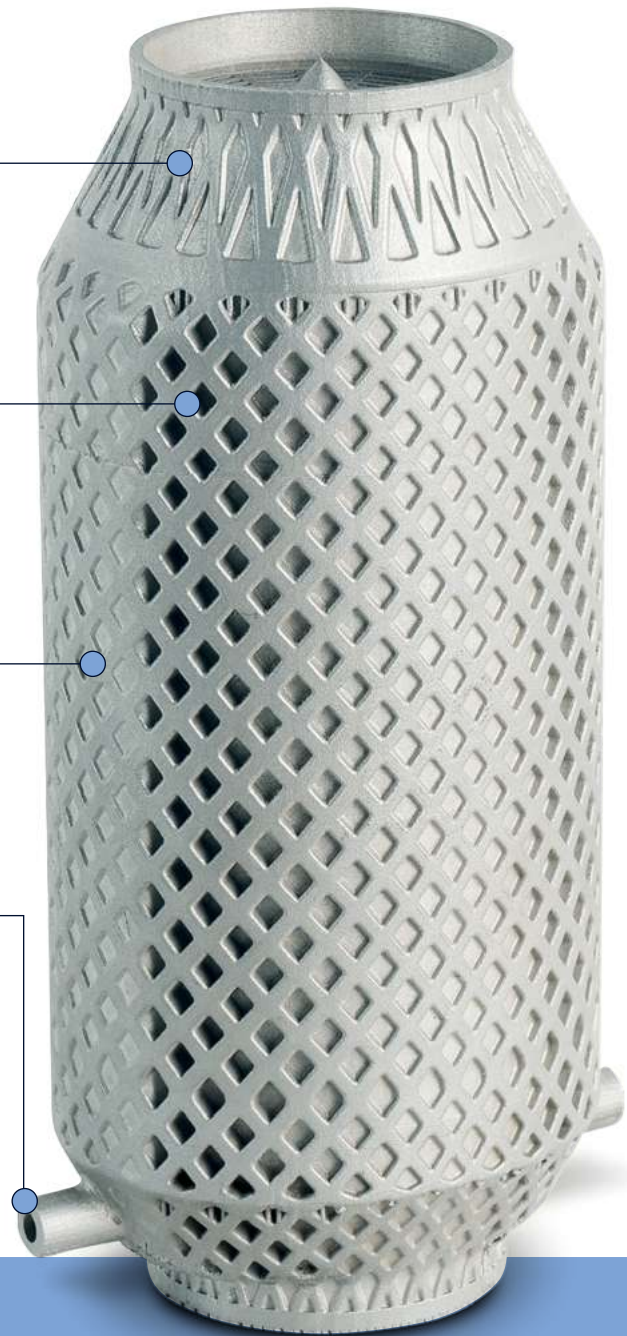**OVERALL BENEFITS OF
ADDITIVE MANUFACTURING**

- 5. Reduced time to market:** Functional prototypes and fast iteration
- 6. Supply chain enhancement:** Reduced inventory and just-in-time production
- 7. Mass customization:** Multiple designs produced without tooling changeovers


- ◆ Aerospace Industry, Heat Exchanger
- ◆ Material: AlSi10Mg
- ◆ Size: 102 × 161 × 319 mm

KEY TECHNOLOGY FOR

FUTURE INDUSTRIES

Additive Manufacturing is decisive for today's industries as it enables unparalleled flexibility, speed, and customization in production and allows for complex geometries. This capability is transformative for sectors where lightweight design, mass customization and performance increase within limited space are key.

By reducing material waste and enabling localized production, Additive Manufacturing also supports the transformation to sustainable practices, positioning it as a **key technology for innovation** in a wide range of industries.

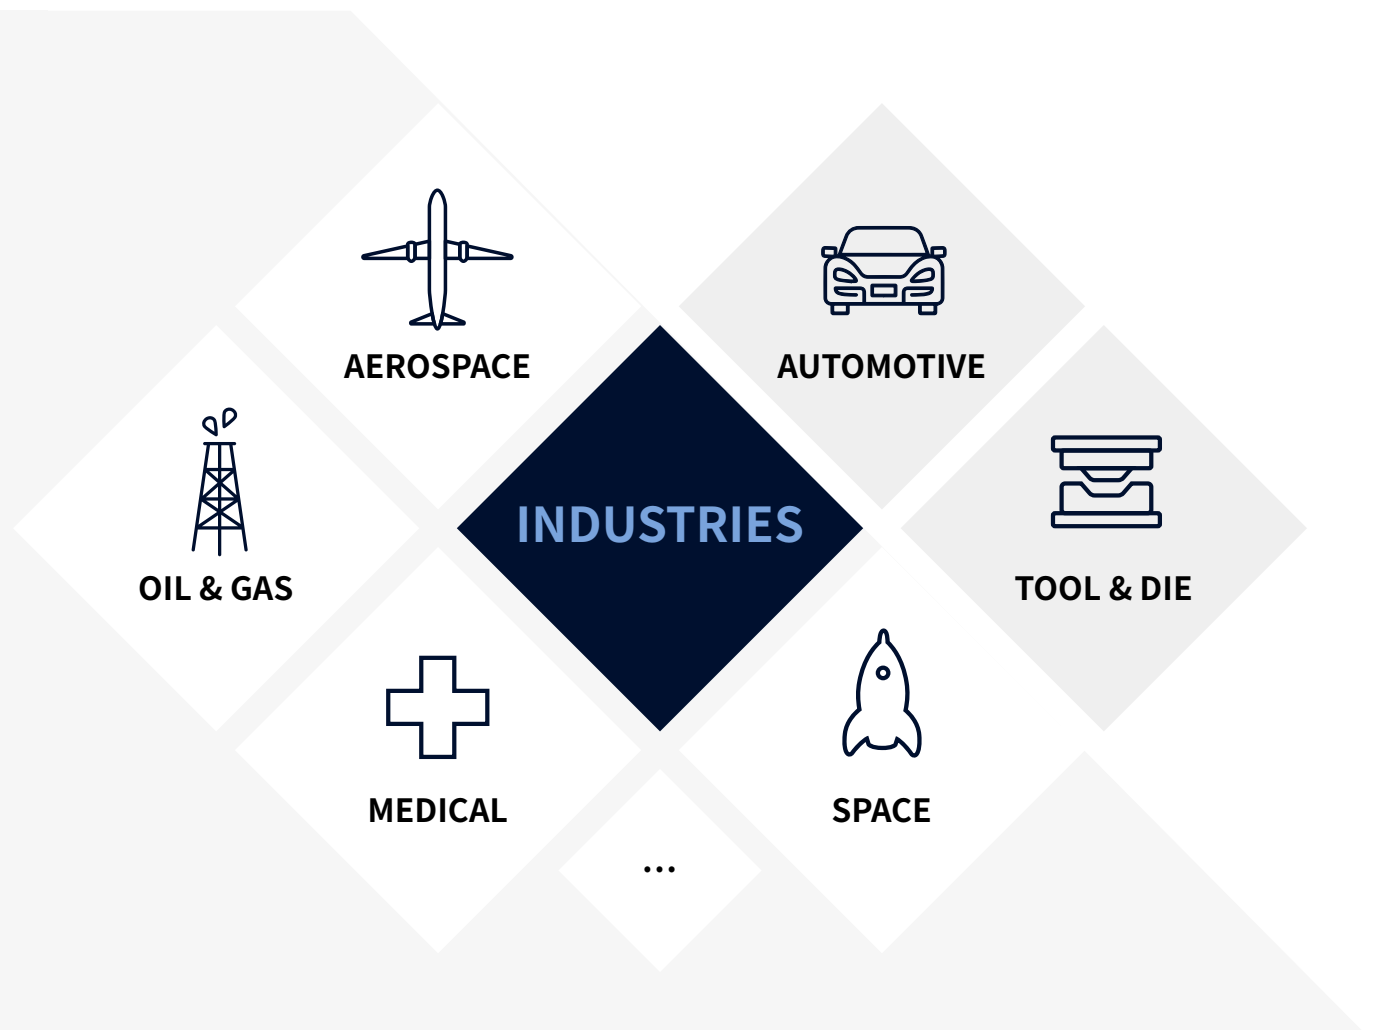

DN SOLUTIONS IS THE GAME CHANGER TO PUSH THE BOUNDARIES OF ADVANCED MANUFACTURING.

**17%
PERFORMANCE
INCREASE**


- ◆ Automotive, Heat Sink
- ◆ Material: AlSi10Mg
- ◆ Size: 35 × 35 × 78 mm



**52%
LESS WEIGHT**

**76%
LESS POWER
CONSUMPTION**

- ◆ Consumer Electronics, UAV Rectifier Heat Sink
- ◆ Material: AlSi10Mg
- ◆ Size: 94 × 54 × 21 mm

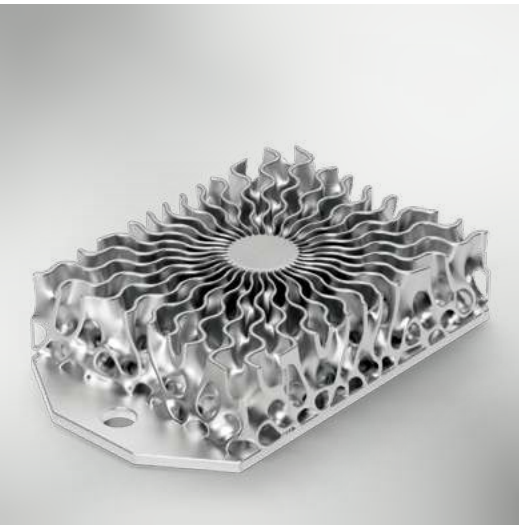

**70%
LESS PRO-
DUCTION TIME**

**50%
COST CUT**

- ◆ Automotive, Tyre Mould
- ◆ Material: SS316L
- ◆ Size: 172 × 111 × 113 mm





**16.5%
LESS WEIGHT**

**29%
INCREASED COOLING
PERFORMANCE**

- ◆ Aviation, Heat Exchanger
- ◆ Material: AlSi10Mg
- ◆ Size: Ø 120 × 143 mm

END TO END SOLUTION

ALL FROM A SINGLE SOURCE

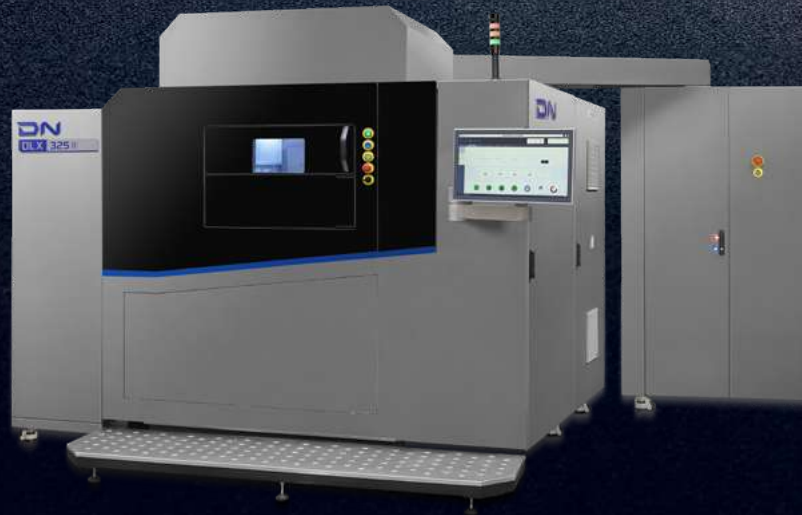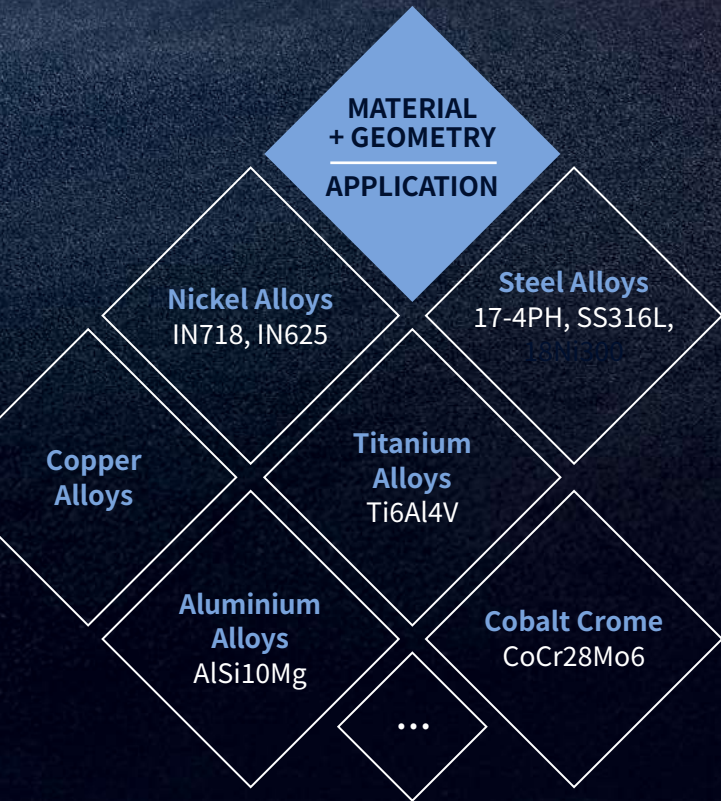

END TO END SOLUTION

APPLICATION



ADDITIVE MANUFACTURING


6 SOFTWARE SOLUTIONS FOR A COMPLETE

AMExplorer

AMBuilder

AMCosting

ESTABLISH A ROBUST,
END TO END PROCESS TO MAXIMIZE
PRODUCTIVITY AND QUALITY.

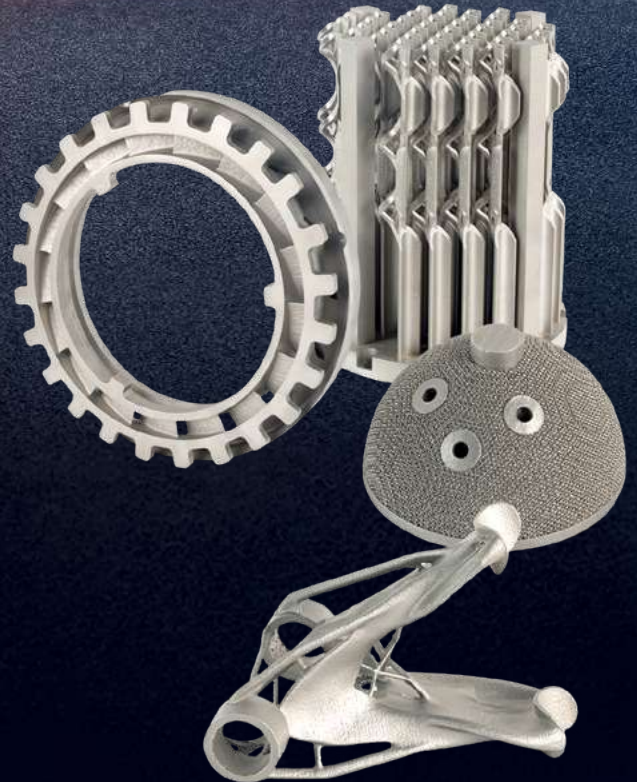

▶ COMPLETE MACHINE RANGE
OFFERED BY DN SOLUTIONS

POST PROCESSING

FINISHED PART


AND CONSISTENT DIGITAL PROCESS CHAIN

AMSimulation

AMBuildSmart

AMptoMet

3 DLX MODELS

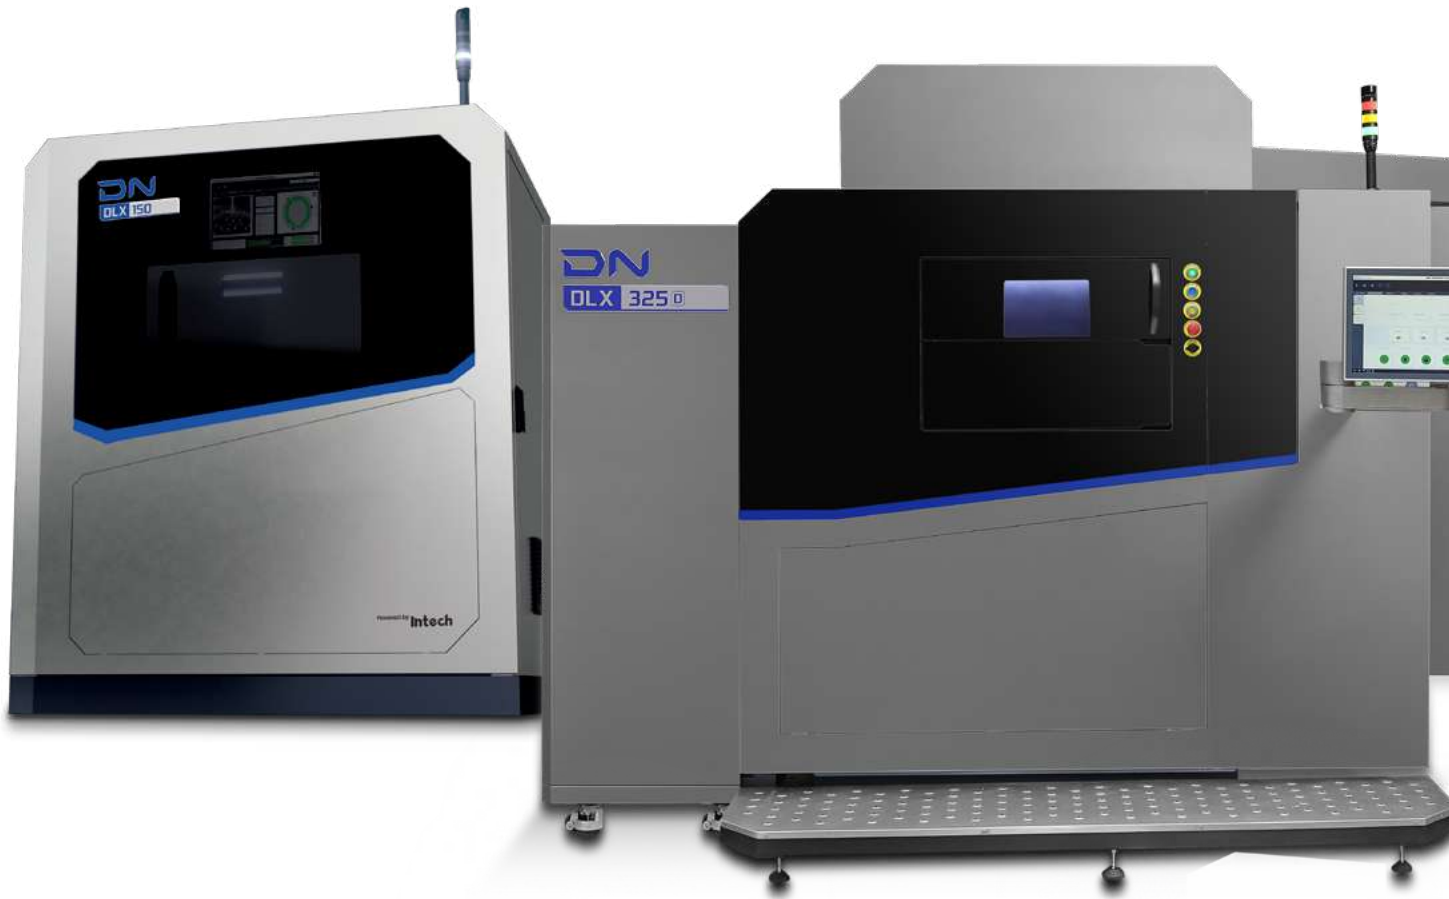

Build Volume
 $\varnothing 150 \times 180$ mm

Build Volume
325 × 325 × 420 mm

SMALL FORMAT FOR ACADEMIA

The perfect compact machine for

- ◆ R&D
- ◆ Universities
- ◆ Vocational schools



Build Volume
450 ×
450 ×
470 mm

MID FORMAT

LARGE FORMAT

INDUSTRIAL SOLUTIONS

Offering uninterrupted 24/7 series production utilizing the segment's largest build volume and mid to large size components.

DLX 325

16 SQM

FOOTPRINT






Build Volume
325 ×
325 ×
420 mm

ADDITIVE FOR HIGH PERFORMANCE INDUSTRIES

DLX 325 / 450

Exceptional build size and maximum productivity with advanced laser optics combinations enables the printing of mid to large-sized complex parts at a faster rate to maximize the productivity of every build.

 <p>NO. OF LASERS 1/2/4</p>	 <p>LASER POWER 500 W / 1000 W</p>	 <p>LAYER THICKNESS 30 – 90 μm</p>	<p>DIMENSIONS (W x D x H)</p> <p>DLX 325* 4500 x 3800 x 2700 mm (177.2 x 149.6 x 106.3 inch)</p> <p>DLX 450 4600 x 4100 x 2800mm (181.1 x 161.4 x 110.2 inch)</p>
---	--	---	--

* DLX 325 Lite with fixed build tank, DLX 325 Full with removable build tank: 4.5 × 3.8 × 2.7 m

DLX 450 19 SQM FOOTPRINT



Build Volume
450 ×
450 ×
470 mm

INTEGRATED POWDER REMOVAL STATION

for safe,
non-contact,
constant
quality production


PERMANENT FILTER MODULE

for uninterrupted
printing and
minimized
operational costs

UP TO 4 LASER
for highest productivities

**REMOVABLE
BUILD CYLINDER***
for minimized job to job time



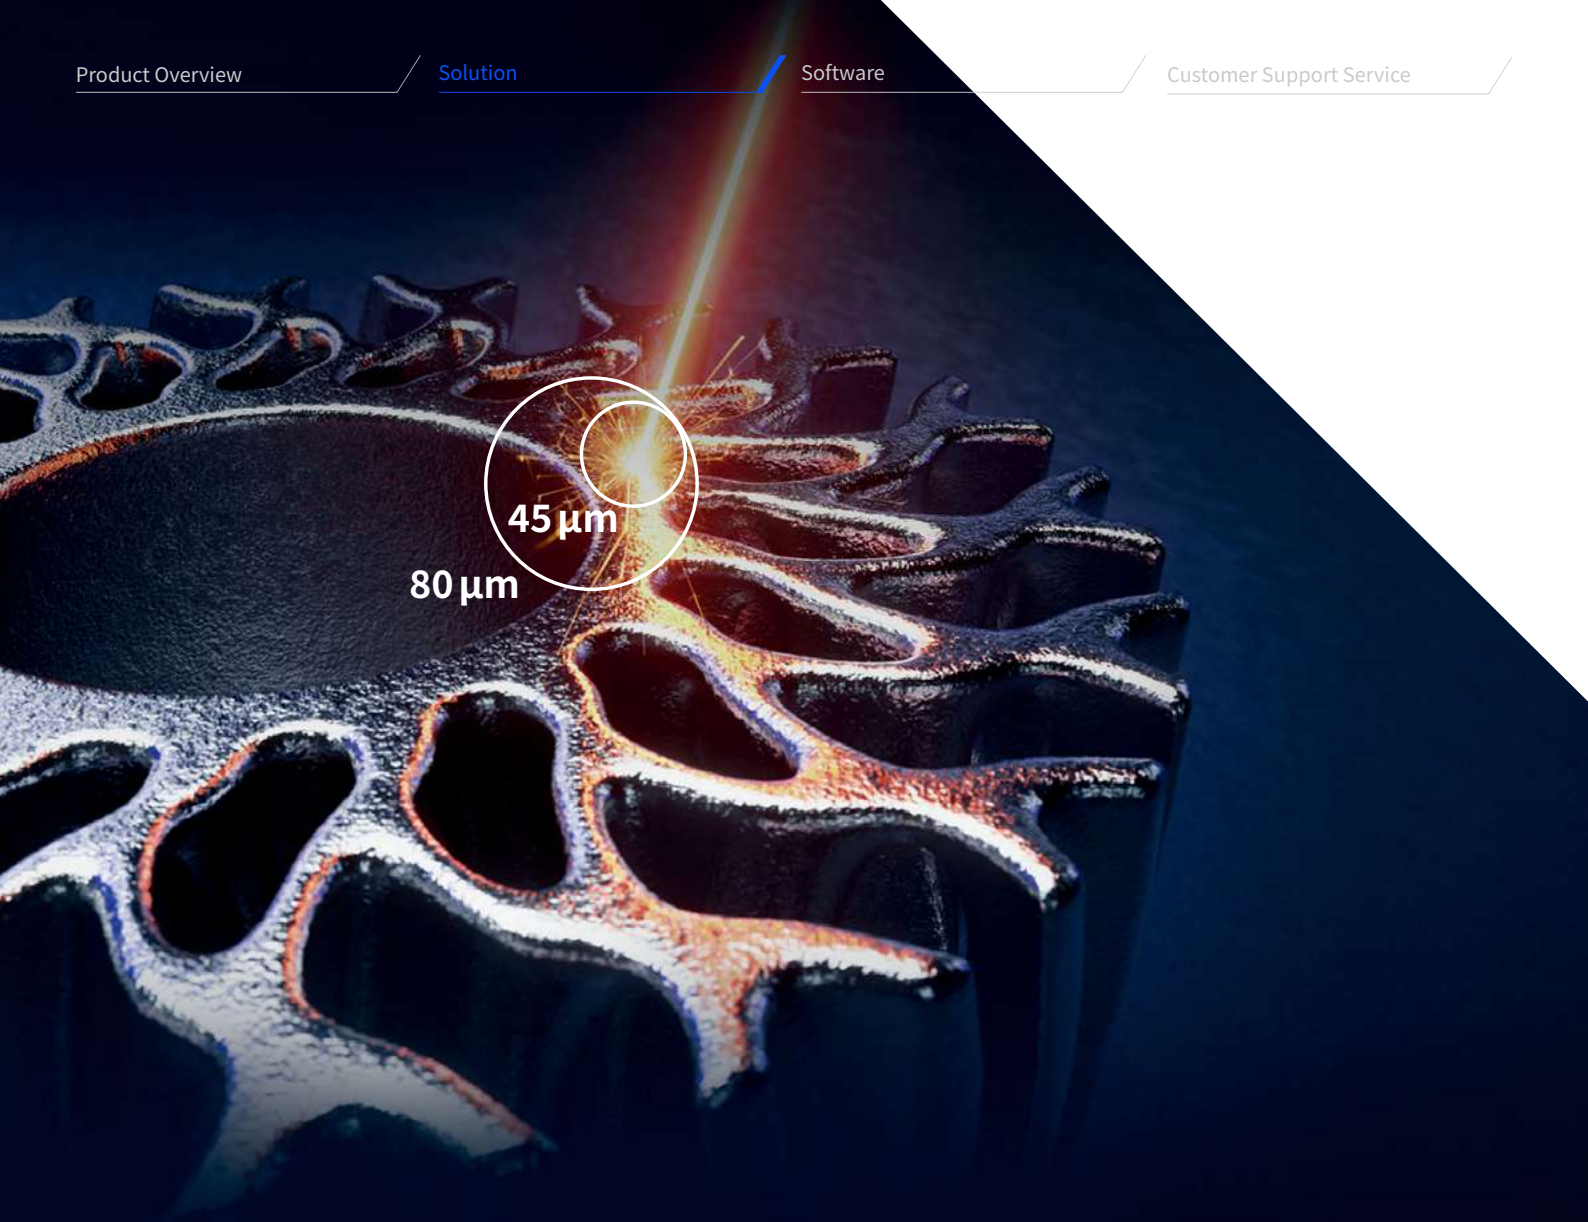

ADDITIVE FOR ACADEMIA

DLX 150

Powerful yet compact, the DLX 150 allows for up to 1000 W laser power enabling part builds with a higher layer thickness, greater throughput and to work with a wider range of alloys. For fine feature detailing, the laser focus diameter can be configured to 45 μm.



BUILD VOLUME
Ø 150 x 180 mm



LASER POWER
500 W / 1000 W



LAYER THICKNESS
20 – 90 μm

DIMENSIONS

(W x D x H)

DLX 150

1650 x 1250 x 2350 mm
(65.0 x 49.2 x 92.5 inch)

ONLY
2.11 SQM
FOOTPRINT

CUSTOMIZABLE LASER

Spot diameter with
45 μm or 80 μm for
unparalleled flexibility
in education and research

**AUTOMATIC
FILTER
CHANGEOVER**
for uninterrupted
printing process



6 CONSISTENT INTEGRATED SOFTWARE SOLUTIONS

DIGITAL END TO END PROCESS CHAIN

Consistent software is key for high quality productive Additive Manufacturing and it all starts with R&D.

1. RESEARCH & DEVELOPMENT

STEP 1

IDEATION R&D

AMExplorer

Identify AM parts within the customers portfolio

STEP 2

PLANNING

AMCosting

Calculate the cost per part quickly

STEP 3

PREPARATION

AMBuilder

Slice, hatch, support and nest the part to be printed

EMPOWER YOUR PROCESS WITH OUR **COMPREHENSIVE SOFTWARE SUITE.**

2. PRODUCTION

3. QUALITY

STEP 4

OPTIMIZATION

AMBuildSmart

Boost efficiency by minimizing support structures

STEP 5

CHECK

AMSimulation


Predict and avoid distortions

STEP 6

RAMP UP

AMOptoMet

Print new alloys and increase productivity for existing ones

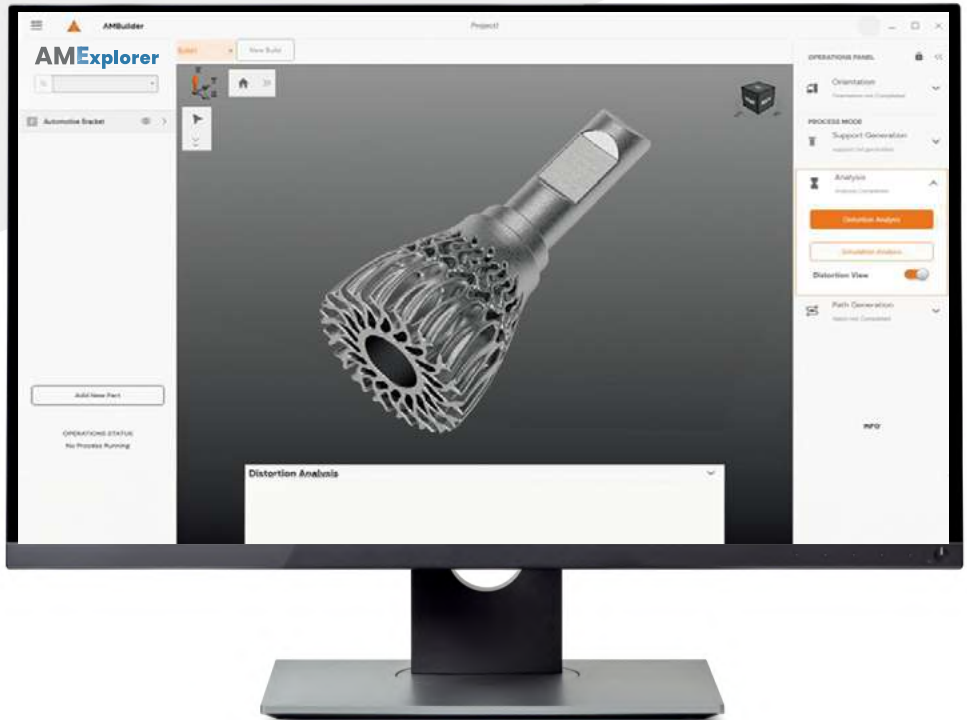

STEP 1 – IDEATION / R&D

FIND THE RIGHT PART

AM Explorer



SUITABILITY

The suitability chart indicates how suitable the part is for 3D printing.

GET STARTED

Automatic modification of part to improve.

1

Automatically find parts to print

2

Understand the part suitability for Additive

3


Automatically redesign the part for printing

“It all starts with R & D ...”

STEP 2 – PLANNING

GET ACCURATE COST

AMCosting

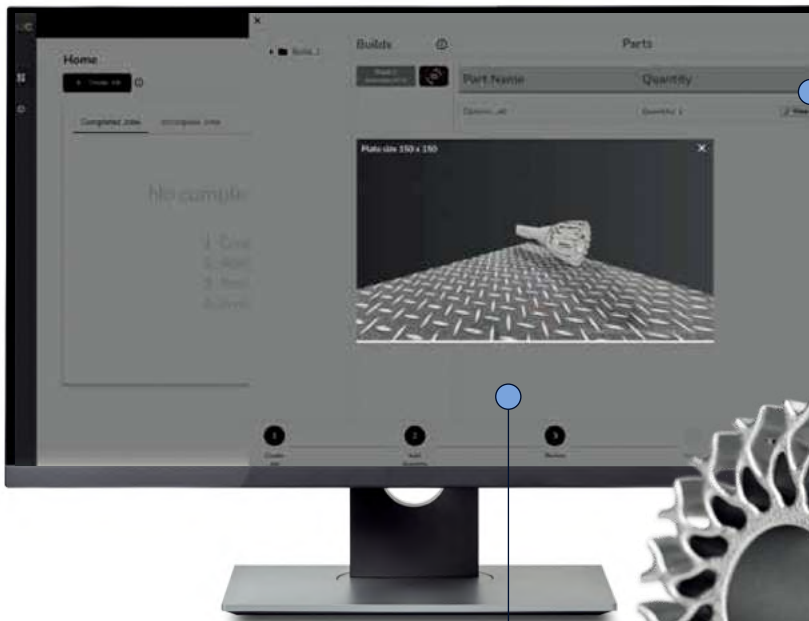

INSTANT COST TRANSPARENCY

Proceed from AMExplorer or upload multiple .stl files for a “nested print” cost.



AUTOMATED COST ESTIMATION

based on CAD files or 2D drawings.



1

Arrive at accurate metal 3D printed part cost

2


Reduce response times with an instant quote

3

Decide between contract printing and buying a 3D printer


STEP 3 – PREPARATION

PREPARE ACCURATE DATA

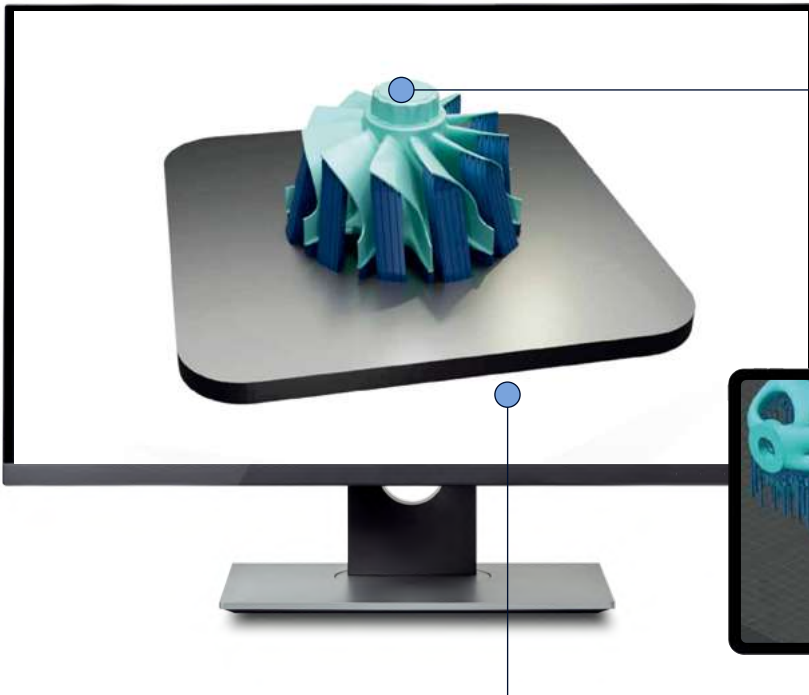

FIRST-TIME-RIGHT

User-centric workflow to have a seamless experience in the end-to-end build preparation process.

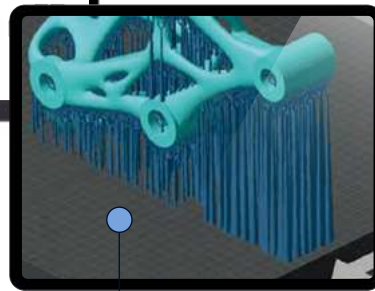

PATH GENERATION

Optimizes tool path to reduce the build time exponentially.

SUPPORT GENERATION

Easily identify critical support areas and reduce data preparation time with semi-automatic support generation.



1

Fast tool for smart data preparation

2

Create and manipulate supports required

3

Fast and robust slicer and path generator

“... moves to production ...”

STEP 4 – OPTIMIZATION

REDUCE BUILD TIME

AM BuildSmart



Manufacturing of a bracket on a DLX 150; Material: SS316L, Part Volume: 8.5 cm³

▶ **AFTER**



SAVINGS

52%
LESS
SUPPORTS

4.3 cm³
vs. 9.1 cm³

27%
LESS MATERIAL
CONSUMPTION

99.5 g
vs. 137 g

21%
LESS TIME

392 min.
vs. 500 min.

1

Drastically
eliminate or
reduce support
structures

2

Build faster
and reduce
post processing
effort

3


Print larger
diameters
for internal
channels

“... and after
quality checking ...”

STEP 5 – CHECK

CORRECT DISTORTIONS

AMSimulation

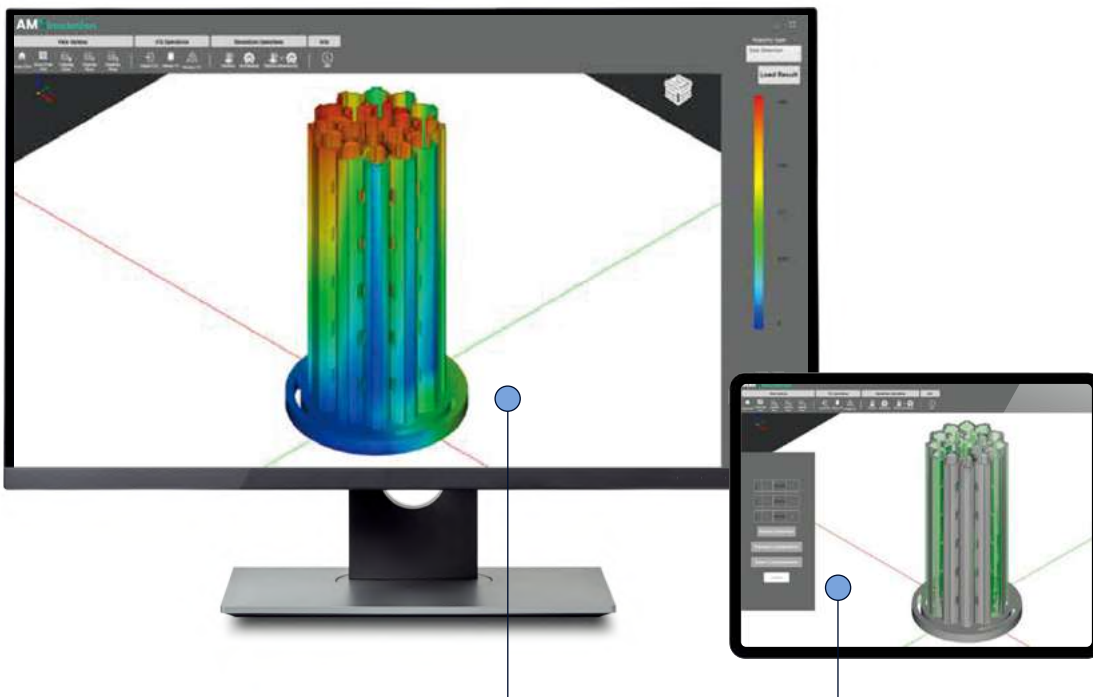

THERMAL DISTORTIONS

The part undergoes a change in volume when cooled down having a deviation from the original geometry.

MECHANICAL DISTORTIONS

Predict location of distortion and correct before printing.

1

Simulate
thermal
distortions

2

Predict
mechanical
deformation
and stress



3

Print
first time
right

“... it scales up.”

STEP 6 – RAMP UP

OPTIMIZE PARAMETERS

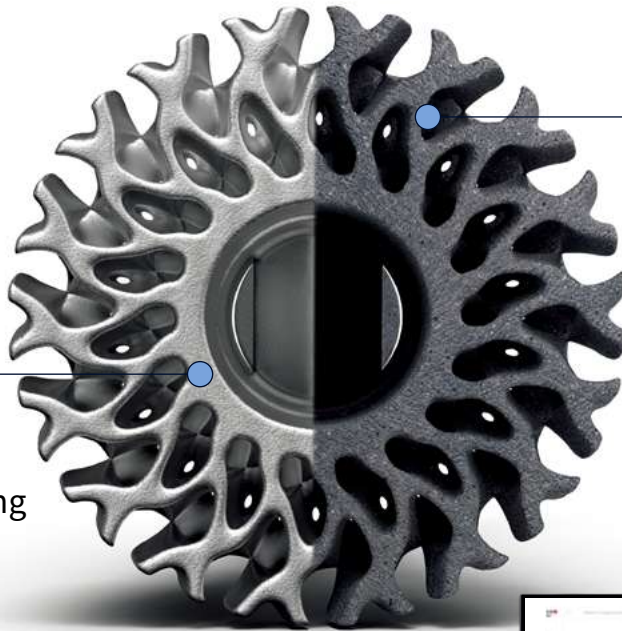

WITH OPTOMET

Reduced post-processing by achieving better surface finish.



WITHOUT OPTOMET
Additional post process steps and time consuming process parameter development efforts.



1
Up to 50% increase in build rate

2
Up to 35% reduction of printing-hours

3
Development of new alloys in < 50% of the usual time

SERVICE WHENEVER YOU NEED IT

FULL STACK SERVICES FROM END TO END

Experience comprehensive support in Additive Manufacturing.

We provide tailored guidance on finding the right parts, optimizing the part design, process setup and performance enhancement, ensuring your production runs smoothly and efficiently.




R&D

1. FIND THE RIGHT PART

Automated part identification and optimization

- ◆ Automatic identification of parts suitable for Additive Manufacturing based on your part catalogue
- ◆ Automatic basic redesign for Additive Manufacturing

AMExplorer

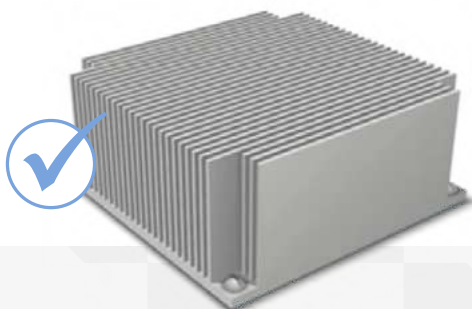

2. OPTIMIZE PART DESIGN

On site training for optimizing part design

- ◆ Train to prepare parts for additive production
- ◆ Minimize support structures to reduce post processing efforts
- ◆ Enhance the part quality by minimizing distortions through pre-simulating the printed result

AMBuilder **AMBuildSmart** **AMSimulation**



TRAINING

Empowering your additive journey with on site and virtual trainings for:

1. Part identification
2. Part redesign
3. Part production
4. Part validation



PRODUCTION

ON SITE SERVICE

3. RAMP UP MANAGEMENT

On site set up and training for stable part production


- ◆ Produce parts
- ◆ Verify quality
- ◆ Set up peripherals
- ◆ Ensure supply of consumables



4. LOCAL SERVICE SUPPORT

In-house resources for software, hardware, and testing

- ◆ Industry-specific domain expertise
- ◆ Worldwide support of local operations
- ◆ Fast response times and local on site service intervention

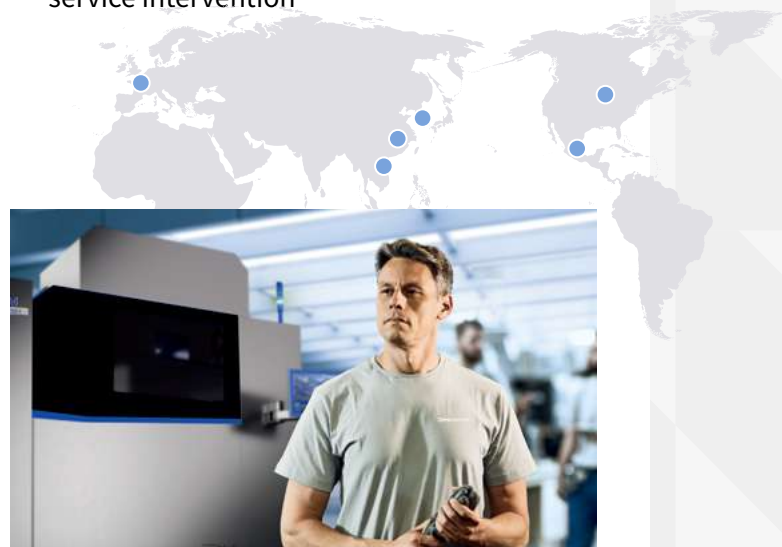

BEST PRACTICE

ADDITIVE REDESIGN

Additive Manufacturing requires a new approach in design.

We support companies with the introduction and enabling the use of Additive Manufacturing. We offer on site or virtual consulting on part identification and redesign for additive production.

OLD**TECHNOLOGY-DRIVEN**

Which material do I have to remove?

TRADITIONAL DESIGN**HYDRAULIC MANIFOLD**

- ◆ Size: 100 × 95 × 68 mm
- ◆ Material: Stainless Steel

OBJECTIVE

Reduce the weight of the hydraulic manifold and maintain the structural integrity for given loading conditions.

...


DEVELOPING
THE FULL POTENTIAL
OF ADDITIVE DESIGN
TOGETHER.

NEW

FUNCTIONAL-DRIVEN

Which material do I have to add?

ADDITIVE DESIGN

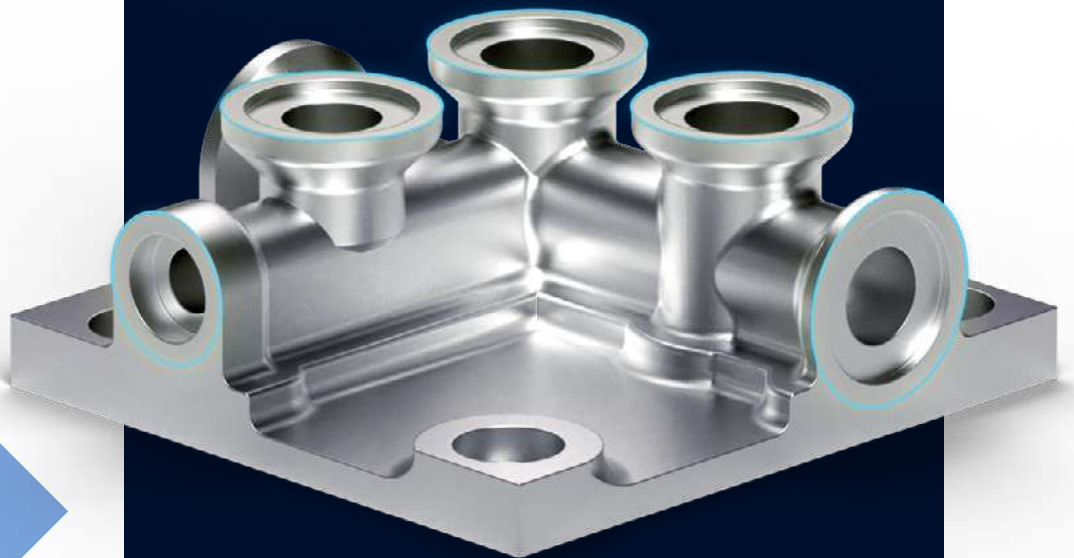

1.
WEIGHT
REDUCTION

2.
FUNCTIONAL
OPTIMIZATION

3.
PERFOR-
MANCE
INCREASE

BENEFITS

- ◆ Total deformation: 0.01 mm
- ◆ Equivalent stress: 328 mpa
- ◆ Factor of safety: 1.7
- ◆ Weight: 0.917 kg
- ◆ Weight reduction: 80%



RELIABLE PARTNER

END TO END SUPPORT GLOBALLY

Our global network, spanning Korea, China, India, USA and Europe among others, is operated as an efficient integrated system in order to provide customers with high-quality products, technologies and services.

- Sales Networks
- Additive Solution Centers



MARKET LEADER 

With around 15,000 sold units in 2023 DN Solutions satisfies the needs of customers in diverse demanding industries and has been recognized for its high global market share.


“With over 140 sales networks in 66 countries we are always nearby.”



3 ADDITIVE SOLUTION CENTERS (ASC) WITHIN 2025

- | | | | |
|---|---|---------------------------------------|---|
| <p>1
Local application development</p> | <p>2
Technology and material development</p> | <p>3
Customer training</p> | <p>4
Local service support</p> |
|---|---|---------------------------------------|---|

MACHINE SPECIFICATIONS

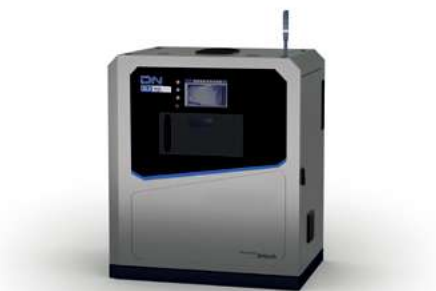DLX 150

SPECIFICATIONS	DLX 150
Build Volume (Ø × H)	150 x 195 mm (5.9 x 7.7 inch) (w/o build plate)
Layer Thickness	20 – 90 µm
Build Rate	20 cm ³ /h and above
Precision Optics Laser	F-theta lens, High speed scanner
Laser Type	Yb – Fiber Laser
Laser Power	500W / 1000W
Optical Configuration	2-axis
Focus Diameter	45 – 80 µm, factory set
Standard Accessories	Chiller, Vacuum cleaner with wet separator
Optional Accessories	N2 Generator
Software	<ul style="list-style-type: none"> ◆ AMBuilder : Build Processing Software ◆ AMOptoMet (optional): Parameter Optimization Software
Weight	1.6 ton (approx.)
Dimension (W/D/H)	1650 x 1250 x 2350 mm (65.0 x 49.2 x 92.5 inch)
Material	AlSi10Mg, CoCr28Mo6, IN718, IN625, Ti6Al4V, Ti6Al4V ELI, 17-4PH, SS316L, 18Ni300

MACHINE SPECIFICATIONS

DLX 325/450

SPECIFICATIONS	DLX 325	DLX 450
Build Volume (X/Y/Z)	325 x 325 x 420mm (12.8 x 12.8 x 16.5 inch) (w/o build plate)	450 x 450 x 470mm (17.7 x 17.7 x 18.5 inch) (w/o build plate)
Layer Thickness	30 – 90 µm	30 – 90 µm
Build Rate	20 cm ³ /h and above	20 cm ³ /h and above
Precision Optics Laser	High speed scanner, Dynamic focussing unit	High speed scanner, Dynamic focussing unit
Laser Type	Yb – Fiber Laser	Yb – Fiber Laser
No. of lasers	1/2/4	1/2/4
Laser Power	500 W / 1000 W	500 W / 1000 W
Laser Configuration (customizable as per request)	<ul style="list-style-type: none"> ◆ Single: 1x 500W / 1000W ◆ Dual: 2 x 500W/1000W 	<ul style="list-style-type: none"> ◆ Single: 1x 500W / 1000W ◆ Dual: 2 x 500W / 1000W ◆ Quad: 4 x 500W
Optical Configuration	3-axis	3-axis
Focus Diameter	min. 80 µm	min. 80 µm
Standard Accessories	Powder removal station, Chiller, Stacker	Powder removal station, Chiller, Stacker
Optional Accessories	<ul style="list-style-type: none"> ◆ Powder sieving unit ◆ Powder convey system ◆ Vacuum cleaner with wet separator ◆ N2 generator 	<ul style="list-style-type: none"> ◆ Powder sieving unit ◆ Powder convey system ◆ Vacuum cleaner with wet separator ◆ N2 generator
Software	<ul style="list-style-type: none"> ◆ AMBuilder : Build Processing Software ◆ AMOptoMet (optional): Parameter Optimization Software 	<ul style="list-style-type: none"> ◆ AMBuilder : Build Processing Software ◆ AMOptoMet (optional): Parameter Optimization Software
Weight	4.5 ton (approx.)	5.5 ton (approx.)
Dimension (W/D/H)	4500 x 3800 x 2700 mm (177.2 x 149.6 x 106.3 inch)	4600 x 4100 x 2800 mm (181.1 x 161.4 x 110.2 inch)
Material	AlSi10Mg, CoCr28Mo6, IN718, IN625, Ti6Al4V, Ti6Al4V ELI, 17-4PH, SS316L, 18Ni300	AlSi10Mg, CoCr28Mo6, IN718, IN625, Ti6Al4V, Ti6Al4V ELI, 17-4PH, SS316L, 18Ni300

**ARE YOU INTERESTED?
SEND YOUR SALES INQUIRY TO
additive@dncompany.com**



dn-solutions.com

Head Office

19F, 10, Tongil-ro, Jung-gu Seoul,
Republic of Korea, 04527
Tel: +82-2-6972-0370/0350
Fax: +82-2-6972-0400

DN Solutions America

360 E State PKWY,
Schaumburg, IL. 60173,
United states
Tel: +1-973-618-2500
Fax: +1-973-618-2501

DN Solutions Europe

Emdener Strasse 24, D-41540
Dormagen, Germany
Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

DN Solutions India

No.82, Jakkuar Village
Yelahanka Hobil,
Bangalore-560064
Tel: + 91-80-2205-6900
E-mail: india@dncompany.com

DN Solutions China

Room 101,201,301, Building 39 Xinzhuan Highway
No.258 Songjiang District China Shanghai (201612)
Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

DN Solutions Vietnam

M.O.R.E building 2F, 40A-40B Ut Tich Street, 04 Ward 04,
District Tan Binh District, Ho Chi Minh City, Vietnam
Tel: +84 28-7304-0163

Sales inquiry

sales@dncompany.com