


TRITON

SEGATRICE A NASTRO MANUALE PER TAGLI DA 0° A 60° A DESTRA
MANUAL BAND SAW MACHINE FOR CUTS FROM 0° TO 60° RIGHT



	Ø	a	a	a
mm		b	b	b
		axb	axb	axb
0°	240	240	210x280	240x260
45°	185	175	140x180	200x165
60°	115	110	110x110	110x110

STANDARD

- ◆ Solida morsa in ghisa con avvicinamento manuale e bloccaggio rapido del pezzo a leva
- ◆ Rotazione arco con fermi di battuta a 0°, 45° e 60°
- ◆ Scala graduata per lettura angolo e robusta leva di bloccaggio rotazione arco
- ◆ Riduttore ad ingranaggi a denti inclinati cementati rettificati e lubrificati con grasso a lunga durata




- ◆ Solid cast iron vice with manual feeding and lever fast piece clamping
- ◆ Head rotation angle stop at 0°, 45° and 60°
- ◆ Graduated scale for angle measure reading and strong head rotation locking lever
- ◆ Reduction gear box with inclined grinded case hardened teeth lubricated with long lasting grease

OPTIONAL

KIT PN - VAT - NB1 BOX - NB2 BOX - LX - MT - KIT G
- VHZ - SR D - PAT 0°

DOTAZIONI ACCESSORIE

ACCESSORY EQUIPMENTS
RE2G - RE1G - C2 - CREC - CRES - RRS - FM...RSE

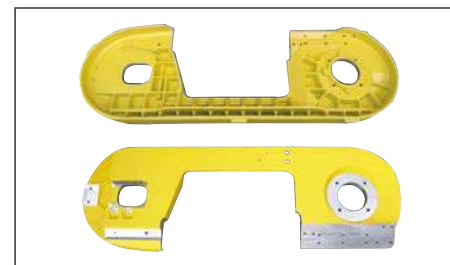

Struttura arco realizzata in lega speciale d'alluminio ad alta resistenza ed idonea ad assorbire le vibrazioni.

Head structure made in high resistance aluminium special alloy suitable to dampen vibrations.



Riduttore ad albero portante ad ingranaggi a denti inclinati cementati rettificati e lubrificati con grasso a lunga durata ed esente da manutenzione (ingrassaggio).

Bearing shaft reducer with helical tooth gears, case-hardened, ground and lubricated with long-lasting, maintenance-free grease (greasing).



Robusto pannello comandi in acciaio in posizione ergonomica per gestire le funzionalità della segatrice.

Heavy-duty steel control panel, ergonomically positioned for full control of all bandsaw operating functions.

lxhxs
2700x27x0,9
mm

35-70
m/min

TRITON

MOTOR

1,3
kW

MOTOR

1,1
kW

TRITON+VHZ

0÷120
m/min

H2O

0,08
kW

335
kg

0,8x1,4x1,5 m
axbxc

950±10
mm

