DN SOLUTIONS

SUPER MULTI-TASKING TURNING CENTER

SMX 2100·2600·3100

SMX 2100/S/ST/B/SB/STB
SMX 2100L/LS/LST
SMX 2600/S/ST NEW Design
SMX 3100/S/ST/L/LS NEW Design
SMX 3100B/835 NEW Design





** The new designs featured in this catalog will be introduced step by step, with application schedules differing by product.*

SMX 2100·2600·3100

The SMX series - Our next generation multi-tasking turning centers are high-productivity, high-precision machines that are easy to operate. By integrating the functionalities and capabilities of multiple machines into one system, the SMX series provides users with a multi-tasking machine tool solution that significantly reduces machining time and machining operations. The SMX series also delivers excellent high-precision machining: accuracy is assured by minimizing thermal deformation through the use of thermal compensation sensors and systems. Ergonomic design focused on o perator convenience, and on efficient and effective maintenance provides the optimal solution that meets every customer's needs.

CONTENTS

Product Overview

Basic Information

04 Basic Structure
05 Machining Area
07 Cooling & Thermal Compensation Concept
08 Spindle
09 Tailstock
10 Automatic Tool Changer
11 Additional Tool Magazine
12 Application Performance
14 Ergonomic Design

Detailed Information

15 CUFOS
19 Fanuc 31i-B Plus
21 SINUMERIK ONE
22 Standard / Optional Specifications
24 Peripheral Equipment
25 Power | Torque
30 External Dimensions
37 Tooling System
40 Working Range
49 Machine Specifications



HIGHER PRODUCTIVITY THROUGH POWERFUL MULTITASKING FUNCTIONS

- Complex machining capabilities of the le spindle, right spindle, B-axis, milling spindle and lower
- Highly-rigid machine construction using structural analysis design
- Maximized Y-axis stroke through machine's orthogonal design structure
- Maximized productivity achieved through simultaneous machining

ENHANCED PRECISION THROUGH HIGH ACCURACY CONTROL FUNCTIONS

- Minimized thermal deformation of the spindle and feed axis using oil cooler system
- A doption of roller LM guideways with high-rigidity and high precision
- Equipped with 0.0001° B-axis and C-axis accuracy control functions

EASY AND CONVENIENT OPERATION THROUGH AN ERGONOMIC DESIGN

- Front located tool magazine
- Side-to-side movable swiveling Operation panel with adjustable Height
  (SMX 2100 : Swiveling & height adjustment possible)
- Convenient ATC-magazine operation panel



The new designs featured in this catalog will be introduced step by step, with application schedules differing by product.

BASIC STRUCTURE

All units are combined in an orthogonal direction to create a highly rigid structure that is intuitive and stable for users, and guarantees stable performance under any processing conditions.

Robust design


FEM (Finite Element Method) analysis results in superior machine stability. All guideways are sealed with a protective covers, preventing high temperature chips and coolant from contacting the guideways, thus maintaining unsurpassed long-term accuracy.



Feed axis

Extended axis travels and improved rapid rates improve machining capacity and deliver excellent productivity.

The X, Y and Z-axes move orthogonally to ensure high accuracy and repeatability.

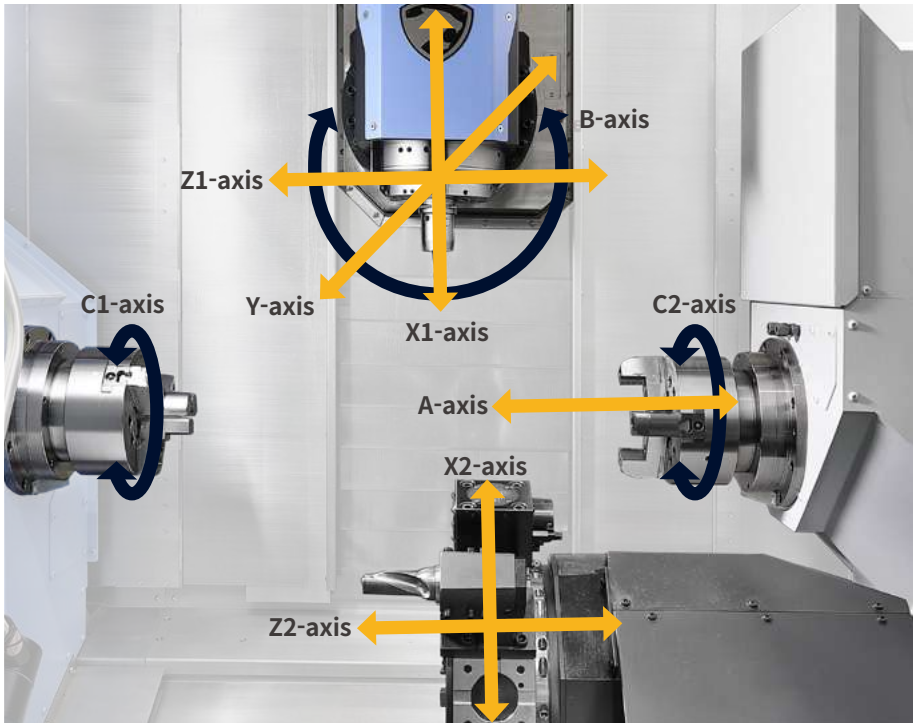


Unit : mm(inch)

Model	Travel					
	SMX 2100 /S/ST/B/ST/STB	SMX 2100L/LS/LST	SMX 2600/S, 3100/S	SMX 3100L/LS	SMX 2600ST/3100ST	SMX 3100B/835
X-axis	630 (-105/+525) (24.8 (-4.1/+20.7))		630 (-125/+505) (24.8 (-4.9/+19.9))		695 (-125/+570) (27.4(-4.9/+22.4))	696 (-46/+650) (27.4(-1.8/+25.6))
Y-axis	210(±105) (8.3 (±5.9))		300 (±150) (11.8 (±5.9))			300 (-200/+100)
Z-axis	1085 (42.7)	1585 (62.4)	1585 (62.4)	2585 (101.8)	1585 (62.4)	835 (32.9)
A-axis	1040 (40.9)❶ 1075 (42.3)❷	1597 (62.9) ❶ 1575 (62.0) ❷	1605 (63.2)❶ 1562 (61.5)	2500 (98.4) ❶ ❷	1540 (60.6) ❶	-
B-axis	240 (±120) deg. (9.4(±4.7))					
X2-axis	220 (8.7) (model : ST)		-		235 (9.3)	-
Z2-axis	1047 (41.2) (model : ST)	1547 (60.9) (model : ST)	-		1540 (60.6)	-

❶ *Right spindle* ❷ *Servo tail stock*

High precision roller type LM guideways

High rigidity, high precision, highly qualified roller type LM guideway realizes fine precision and fast speed, minimizing non-cutting time and re-machining work.

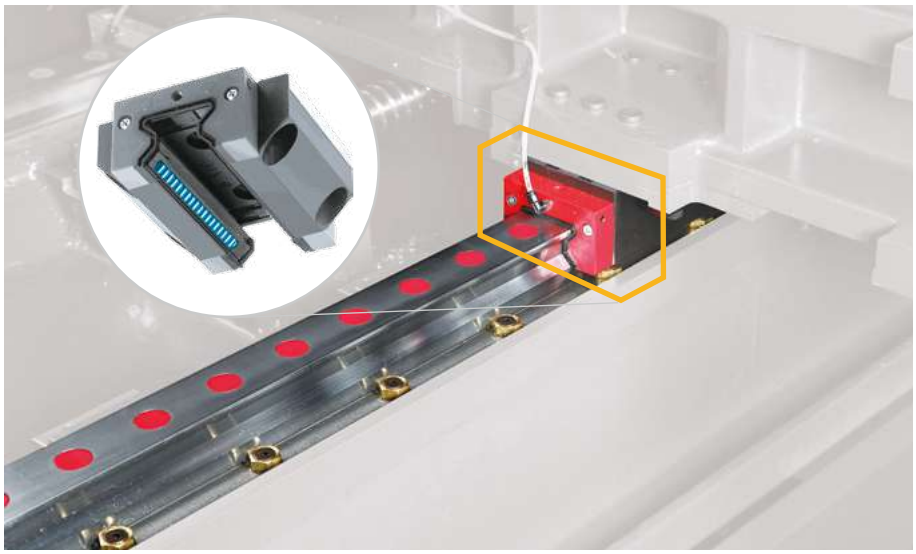

Unit : mm(inch)

Rapid traverse rate						
Model	**SMX 2100 /S/ST/B/ST/STB**	**SMX 2100L/LS/LST**	**SMX 2600/S, 3100/S**	**SMX 3100L/LS**	**SMX 2600ST/3100ST**	**SMX 3100B/835**
X-axis	48 (1889.8)					
Y-axis	36 (1417.3)					
Z-axis	48 (1889.8)			30 (1181.1)	48 (1889.8)	
A-axis	30 (1181.1)			20 (787.4)	30 (1181.1)	-
B-axis	40 r/min					
X2-axis	24 (944.9)		-	-	24 (944.9)	-
Z2-axis	36 (1417.3)		-	-	36 (1417.3)	-

❶ Right spindle (Servo tail stock is not applicable)

MACHINING AREA

An increased machining area, as a result of the SMX machines' orthogonal structure, and an extended turning diameter capability, enables the machining of large workpieces.

Maximized X-axis, Y-axis machining area through orthogonal structure design

Wide X-axis, Y-axis enables machining of parts of various sizes/shapes, making machining programming and set-up easier.

X-axis machining area

SMX 2100/B, 2100L
630 mm
(24.8 inch)

SMX 2600/3100
630 mm
(24.8 inch)


SMX 2600ST/3100ST
695 mm
(27.4 inch)

SMX 3100B/835
696 mm
(27.4 inch)

Y-axis machining area

SMX 2100/B, 2100L
210 mm
(8.3 inch)

SMX 2600/3100
SMX 3100B/835
300 mm
(11.8 inch)

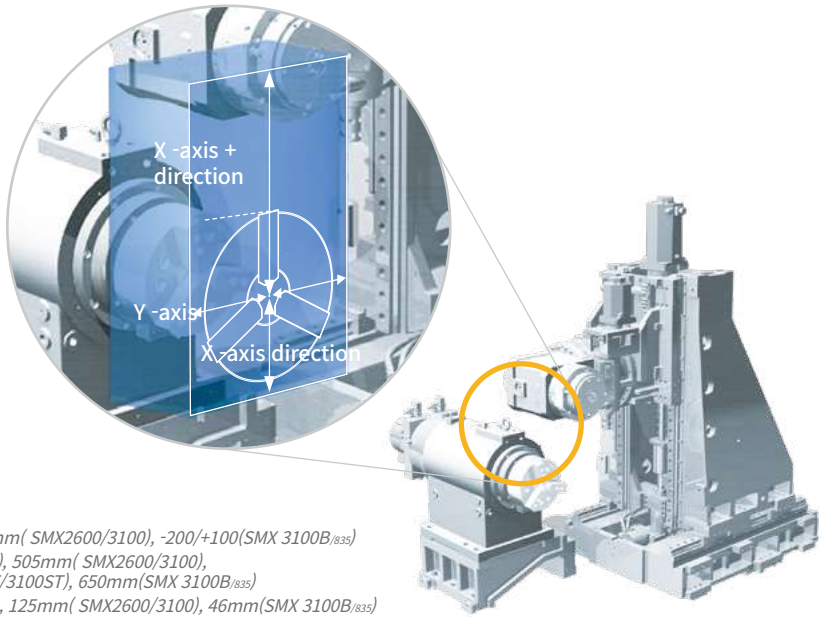

Yaxis : ±105mm(SMX 2100/B), ±150mm(SMX2600/3100), -200/+100(SMX 3100B/835)
Xaxis +direction : 525mm(SMX 2100/B), 505mm(SMX2600/3100), 570mm(SMX2600ST/3100ST), 650mm(SMX 3100B/835)
Xaxis -direction : 105mm(SMX 2100/B), 125mm(SMX2600/3100), 46mm(SMX 3100B/835)

MACHINING AREA

Extended machining area

Extended area enable various machining of large and long materials, and make it easy for users to access inside for set-up.

(A) Max. machining diameter

SMX 2100/2100L
600 mm (23.6 inch)

SMX 3100B/835
760 mm (29.9 inch)

SMX 2600/3100
660 mm (26.0 inch)


(B)Max. machining length

SMX 2100/B
1040 mm (40.9 inch)

SMX 2100L, 2600/3100
1540 mm (60.6 inch)

SMX 3100L
2540 mm (100.0 inch)

SMX 3100B/835
790 mm (31.1 inch)

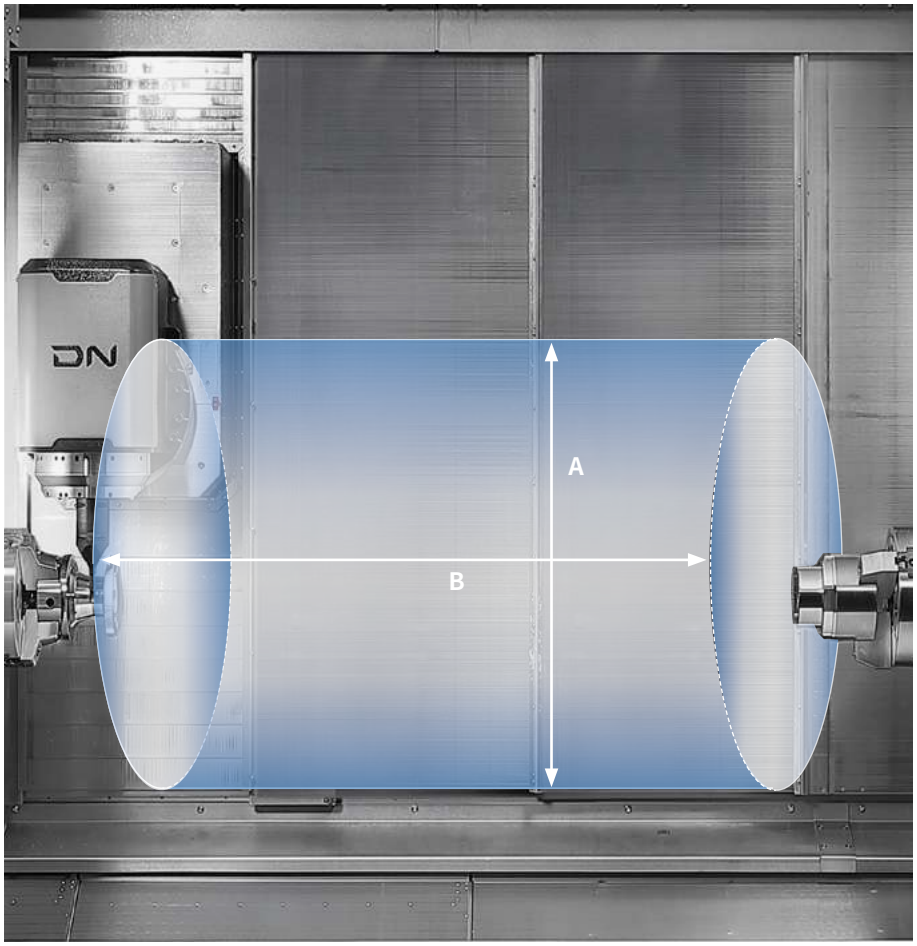


Large bar working diameter

SMX 2100 / L
65 mm (2.6 inch)

SMX 2100B / 2600
81 mm (3.2 inch)

SMX 3100, **SMX** 3100B/835
102 mm (4.0 inch)

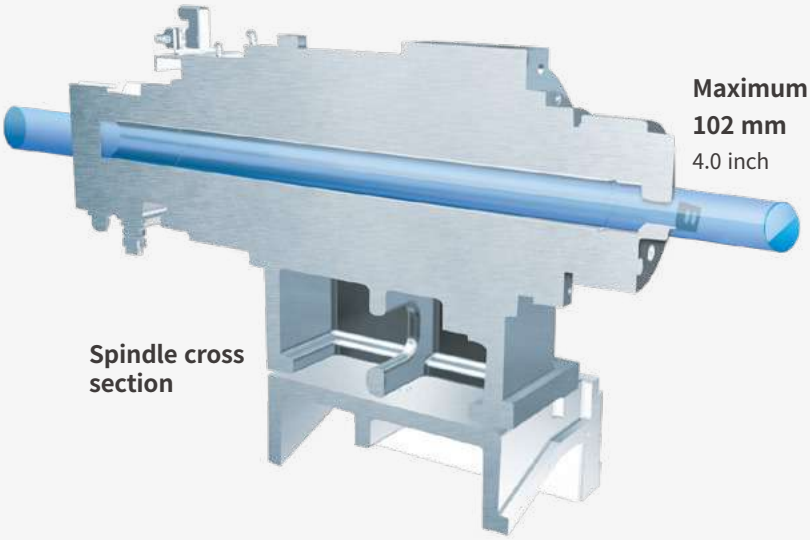

CUTTING PERFORMANCE

Powerful and fast machining capability across turning, milling, drilling, tapping and other multi-taskingoperations ensures higher productivity and efficiency.

Powerful machining

Material : S45C

O.D. cutting (SMX 3100)

Spindle speed r/min	Cutting speed m/min (ipm)	Feedrate mm/rev	Radial cutting depth mm (inch)	Material removal rate cm³/min (inch³/min)
253	210 (8267.7)	0.55 (0.0)	8.5 (0.3)	1405 (85.7)

U-drill (milling)

Tool mm (inch)	Spindle speed r/min	Feedrate mm/min (ipm)	Material removal rate cm³/min (inch³/min)
Ø63 (2.5)	1010	131 (5.2)	409 (25.0)

Face milling


Tool mm (inch)	Milling spindle speed r/min	Radial cutting depth mm (inch)	Feedrate mm/min (ipm)	Material removal rate cm³/min (inch³/min)
Ø80	1100	5 (0.2)	1117 (44.0)	357 (21.8)

End milling

Tool mm (inch)	Milling spindle speed r/min	Radial cutting depth mm (inch)	Feedrate mm/min (ipm)	Material removal rate cm³/min (inch³/min)
Ø25	382	25 (1.0)	200 (7.9)	125 (7.6)

Tapping

Tool mm (inch)	Milling spindle speed r/min	Feedrate mm/min (ipm)
M30 x P3.5	212	742 (29.2)

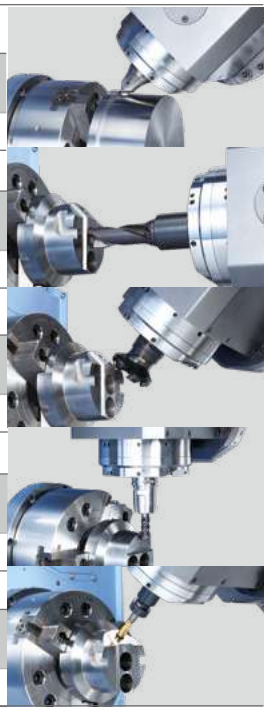

** The results above reflect internal test figures using the SMX 3100. Please refer to as examples only, as different cutting and environment conditions may give different results.*

Higher productivity through multi-tasking operation

Faster machining times compared to working with many conventional machines provides superior productivity and machining capability.



Reduced production lead time by

75 %



Conventional machining

Machine 1 (Turning Center)
- Setting
- Turning
- Remove and move workpiece

Machine 2 (Machining Center)
- Setting
- Conventional Milling
- Change fixture for the angular surface machining
- Milling for the angular surface
- Remove and move workpiece

Machine 3 (Turning Center)
- Setting
- Turning

650 minutes

Multi-tasking of SMX

SMX 2600S
- Setting
- Turning
- Milling
- Automatic feed
- Turning
- Milling

163 minutes


Increased work efficiency using one time setup on one machine

COOLING CONCEPT TO ACHIEVE HIGH ACCURACIES OVER LONG MACHINING RUNS

Machines have been designed and built to minimize thermal displacement and ensure superior accuracies over long machining runs and lengthy periods of operation.

Minimizing thermal deformation by oil cooling

A spindle and ballscrew core cooling system minimizes thermal deformation during long machining runs to achieve high-accuracy parts production.

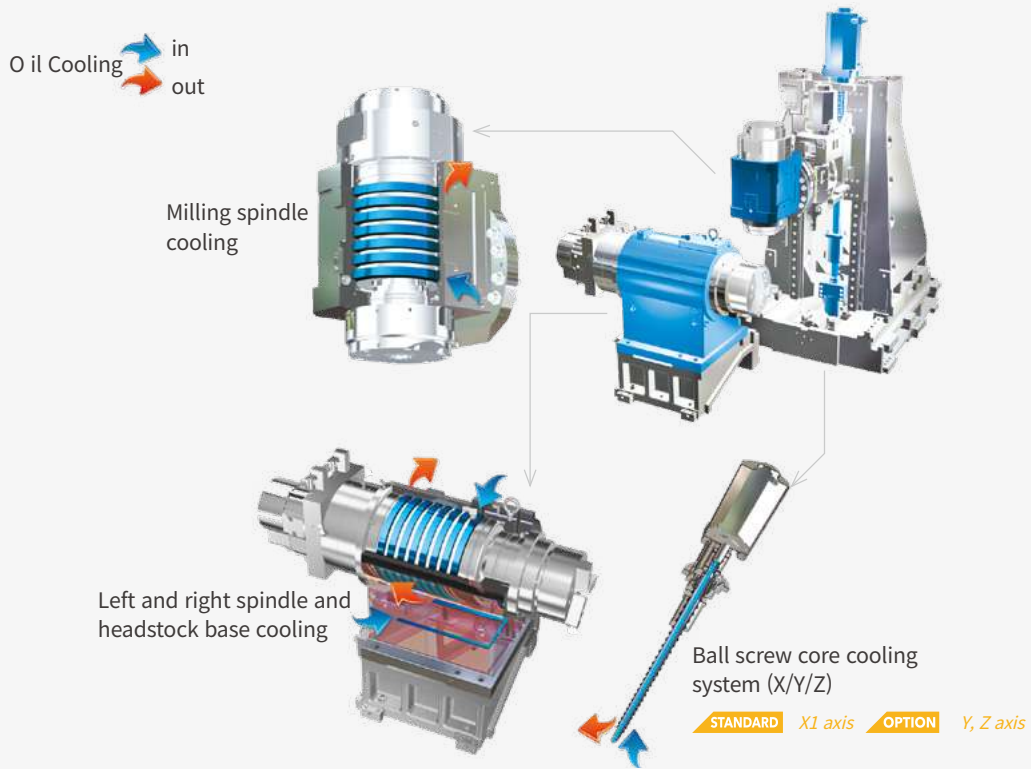


Circularity

By undertaking extensive testing of individual machine elements and analysing the results in detail, the SMX series achieves a high level of precision and reliability that exceeds customer expectations.

Turning (O.D. machining)


SMX 2600
0.5 µm



Material	Aluminium
Tool	Diamond tool (Nose radius 0.5 min (0.02 in.))
Spindle speed	3000 r/min
Feedrate	0.5 mm/rev (0.02 ipr)

Milling (X-Y contouring)

SMX 2600
3.2 µm




Material	Aluminium
Tool	End mill Ø20 mm (0.787 in.)
Spindle speed	8000 r/min
Feedrate	2500 mm/min (98.4 ipm)

** This test is performed under DN Solutions Machine Tool's test environment.*

SPINDLE

Perfect combination of three high-performance spindles to ensure machining stability operating under various cutting conditions.

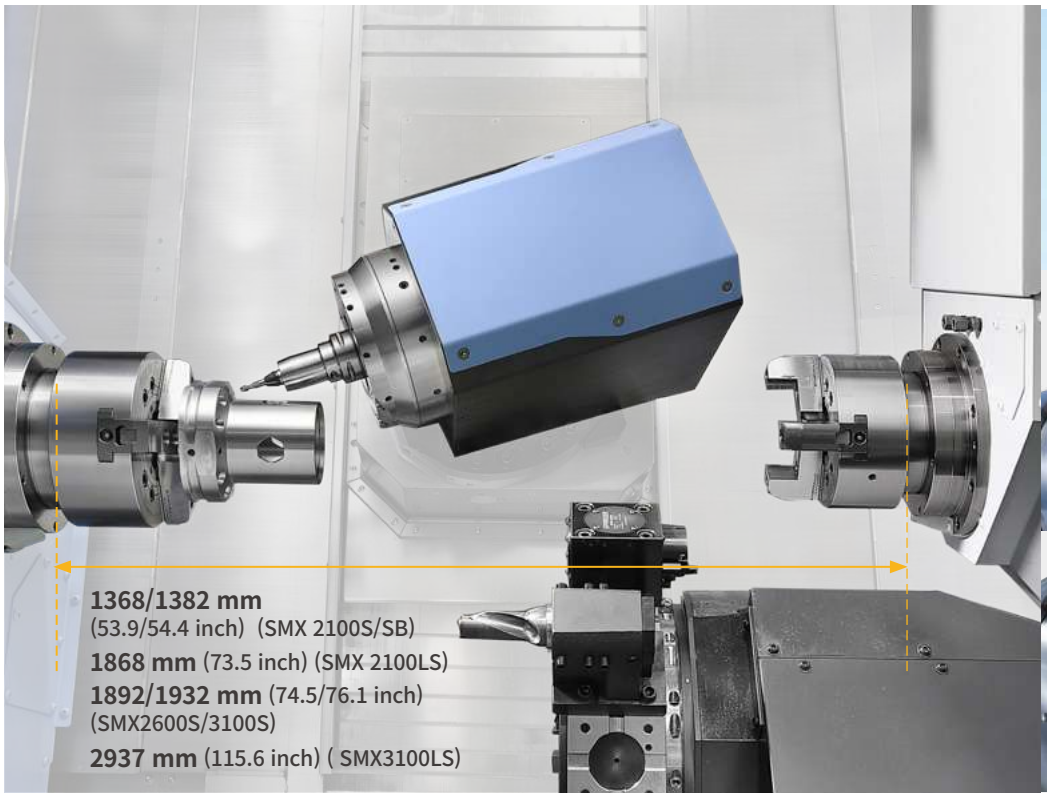



Milling spindle

SMX 2100/L/B

12000 r/min, **22** kW (29.5 Hp)
{20000 r/min, 22 kW (29.5 Hp) OPTION}
** 20000 r/min option : available only with FANUC 31i-B Plus, FANUC 31i-B5 Plus, CUFOS NC system*

SMX 2600, 3100/L

12000 r/min, **26** kW (34.9 Hp)

Tool shank of milling spindle

CAPTO C6 {HSK-T63 OPTION}

Lef t spindle

SMX 2100/L
8 inch

SMX 2100B/ **SMX** 2600
10 inch

SMX 3100, **SMX** 3100B/835
12 inch

Right spindle(S/ST)

SMX 2100/B, 2100L
8 inch

SMX 2600/3100
10 inch

Perfect combination of rotating spindles

Both left and right spindles are capable of high-accuracy C-axis operation and, with the milling spindle, can perform various machining functions like turning, milling and synchronized cutting in a single set up.

Model	Spindle	Standard Chuck inch	Spindle speed r/min	Power kW (Hp)	Torque N·m (ft-lbs)	Condition
SMX 2100 series	Left Spindle	8	5000	22/22/18.5/15 (29.5/29.5/24.8/20.1)	467 (344.6)	S3 15%/25%/30min/ cont.
SMX 2100B series		10	4000	22/22/22/15 (29.5/29.5/29.5/20.1)	512 (377.9)	S3 15%/25%/15min/ cont.
SMX 2600 series		10	4000	30/26/22 (40.2/34.9/29.5)	724 (516.6)	S3 25% / S2 30min /S1 Cont.
SMX 3100 series		12	3000	30/25 (40.2 / 33.5)	1203 (887.8)	30min/cont.
SMX 3100B/835		12	2400	30/25 (40.2 / 33.5)	1203 (887.8)	30min/cont.
SMX 2100 S/ST/SB/STB	Right Spindle	8	5000	22/18.5/15 (29.5/24.8/20.1)	467 (344.6)	S3 15%/30min/cont.
SMX 2600S/ST, 3100S/LS/ST		10	4000	30/26/22 (40.2/34.9/29.5)	724 (516.6)	S3 25% / S2 30min /S1 Cont.

Torque	Spindle	Tool shank	Spindle speed r/min	Power kW (Hp)	Torque N·m (ft-lbs)	Condition
SMX 2100/2100B series	Milling Spindle	CAPTO C6 {HSK-T63}	12000	22/22/18.5/15 (29.5/29.5/24.8/20.1)	84.3 (62.2)	S3 15%/25%/30min/ cont.
SMX2600,3100/L series, SMX3100B/835				22/18.5/15 (29.5/24.8/20.1)	154 (113.7)	S6 25% / S2 30min /S1 Cont.

High precision control of Left spindle spindle axes (C & B-axis)

Machining operation is mainly done by the Left spindle and the Milling spindle. The C-axis of the left spindle and the B-axis of the milling spindle, with Y-axis control, facilitates multitasking operations i.e. drilling, tapping and end milling at any angle. It also enables the machining of precise angles and sculpted contours via 5-axis simultaneous machining.



B-axis 240° (± 120°) Large B-axis Stroke

Left spindle



C-axis positioning control

To enhance C-axis positional accuracy of the left spindle, a positioning compensation sensor has been used. The left spindle can have C-axis positioning control every 0.0001° increment over 360°.

B-axis positioning control - precise continuous indexing

High-accuracy B-axis indexing (every 0.0001° over ±120°) delivers outstanding positioning accuracy and enables a range of machining operations to be undertaken - from horizontal front face machining to angular machining.

Braking index at a random angle


Within its ±120° range, the B-axis can be indexed and braked precisely at a random angle.



Swivelling and indexing of the B-axis is achieved by a servo motor and a roller gear cam operating with high-rigidity and high-precision.

TAILSTOCK

Easier and faster set-up of the tailstock using M-code programming (control servo motor and ballscrew).

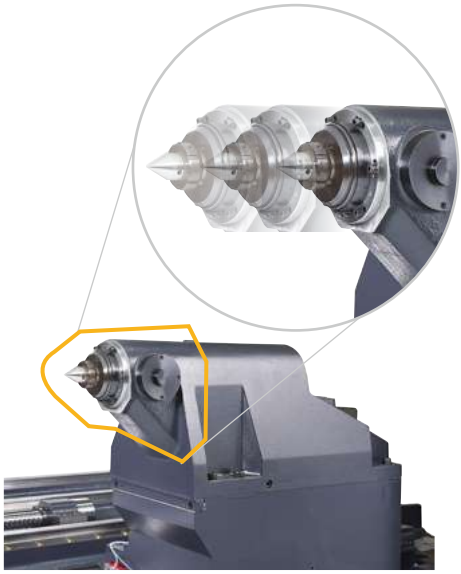

Servo-driven tailstock

The servo-driven tailstock makes set-ups faster and easier to complete. The operator inputs the proper M-code information into the control and the tailstock moves to its correct position automatically, by linear motion control of the servo motor and ballscrew. No manual adjustments are required.

Model	Tail stock travel mm (inch)	Max. quill thrust force kN	Tail stock center
SMX 2100/B [L]	1075 (42.3) [1575 (62.0)]	7	Built-in type dead center, MT#4
SMX 2600/3100	1562 (61.5)	10	Built-in type dead center, MT#5
SMX 3100L	2500 (98.4)	15	

** SMX 3100B/835 : without tailstock*

AUTOMATIC TOOL CHANGER

The servo-driven ATC and servo tool magazine ensures fast and reliable tool indexing.

Tool storage

40 {80/120 OPTION} tools

Max. tool length (from gauge line)

SMX 2100/B, / 3100B/835

300 mm
(11.8 inch)

SMX 2100L

400 mm
(15.7 inch)

SMX 2600 / 3100

450 mm
(17.7 inch)

Max. tool weight

12 kg
(26.5 lb)

Max. tool moment

9.8 N·m
(7.2 ft-lbs)

Max. tool diameter (continuous)

90 mm
(3.5 inch)

Max. tool diameter
(adjacent pots are empty)


130 mm
(5.1 inch)

Enlarged touchscreen panel is available as an option

7 {10.4 OPTION} inch

Servo-driven ATC and tool magazine

The tool magazine capacity can be increased to 120 tools. Tools are selected by the fixed address method that helps reduce changeover times.

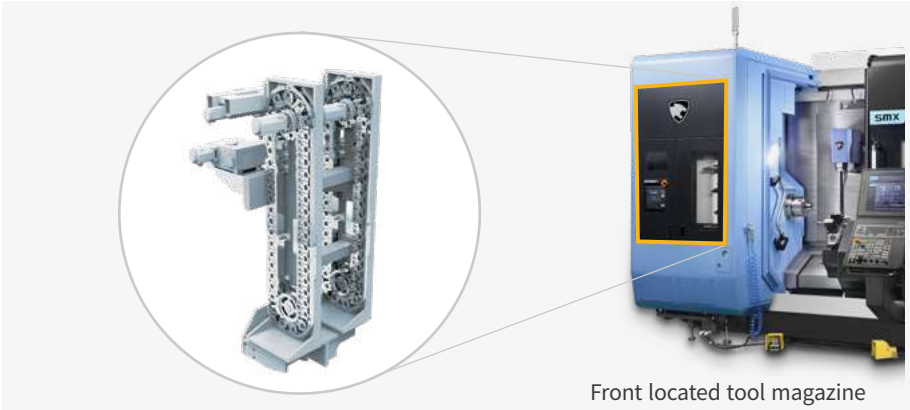

The photo is tool magazine of 80 tools

Front located tool magazine ensuring easy tool maintenance

ATC operation panel

The status of the ATC and the tool magazine can be viewed on a separate touchscreen. The touchscreen is used operates the ATC, the tool magazine and the tool pot carrier.



ATC magazine information display

The operational status of the ATC magazine, which is difficult to check from outside, can be seen at a glance .

Convenient touchscreen operation

Available buttons are activated according to current and next step operations. In this way complex manual operations are undertaken logically and easily.

Tool magazine monitoring

Tool magazine status can be monitored in real time by a CCTV installed inside the magazine.

** Only available with 10.4 inch ATC operation panel*

ADDITIONAL TOOL MAGAZINE

As an option, just for SMX 3100L/LS, a long tool magazine is available for machining long parts (i.e. tubes, valves etc.).

LONG TOOL Max. tool size

Ø60 x L600 mm
(Ø 2.4 x L 23.6 inch)

Max. weight

15 kg
(33.1 lb)

GUN DRILL Max. tool siz

Ø30 x L800 mm
(Ø 1.2 x L 31.5 inch)

Tool storage

3 tools ❶

❶ Customers can select a tool storage capacity of 2+1 tools instead of 3 tools. The 2+1 storage means 2 tools of Ø60 x L600 mm or Ø30 x L800 mm and 1 large diameter tool, Ø190 x L200 mm, can be mounted in the long tool magazine.

Number of tool stations

SMX 2100ST/LST/STB OPTION
12 ea, **24** st. Indexing

SMX 2600ST/3100ST
12 ea

Tool holder type OPTION

SMX 2100ST/LST/STB
BMT 55P

SMX 2600ST/3100ST
BMT 65P

Max. rotary tool speed OPTION

5000 r/min
10000 r/min

**10000 r/min : available on only SMX 2100ST/STB/LST(FANUC NC)*

Various applications for the lower turret OPTION

Case1) Steady rest on lower turret
Case2) Tailstock on lower turret application for long part machining

Tool magazine for long tool OPTION *SMX 3100L / LS*

SMX 3100L/LS can be equipped with a long tool magazine as an option.


SMX 3100L/LS can accommodate workpieces up to 2540mm between centers. The machine can process long tubes such as landing gear axles requiring a center bore. Because the automatic Tool changer on this model cannot handle a long tool, the separate tool magazine, just for these tools, has 3 tool stations for tools up to 600mm.



Rigid servo-driven lower turret

(SMX 2100ST/LST/STB, SMX 2600ST/3100ST)

Turret rotation, acceleration/ deceleration and the large diameter curvic coupling are all controlled by a high-torque servo-motor. Unclamping and rotation are virtually simultaneous. Fast indexing helps keeps cycle times short.

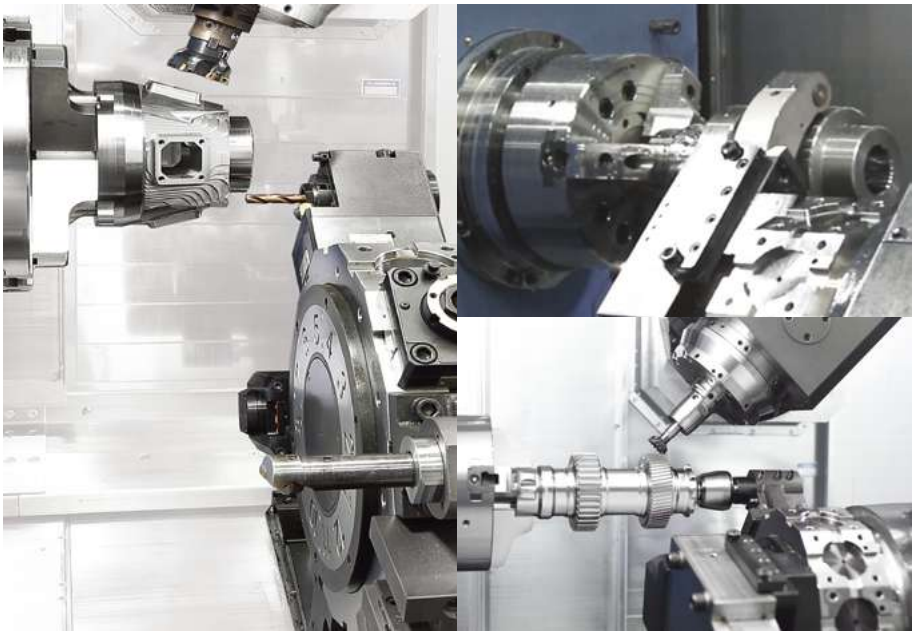

APPLICATION PERFORMANCE

Multi-tasking, which is performing more than one duty at a time, can deliver up to a 40% increase in productivity and can have a positive impact on your company's bottom line.


Benefits of multi-tasking

Using a single set up, one machine is capable of performing all machining processes that generally require two, three or even more machines to complete. By minimizing time and labor, the process cost is reduced and lead times are shortened by up to 75%. This provides a significant advantage when undertaking high mix : low volume manufacturing.

Reduced production lead time by

75 %

Reduced time and operator interventions and enhanced accuracy!

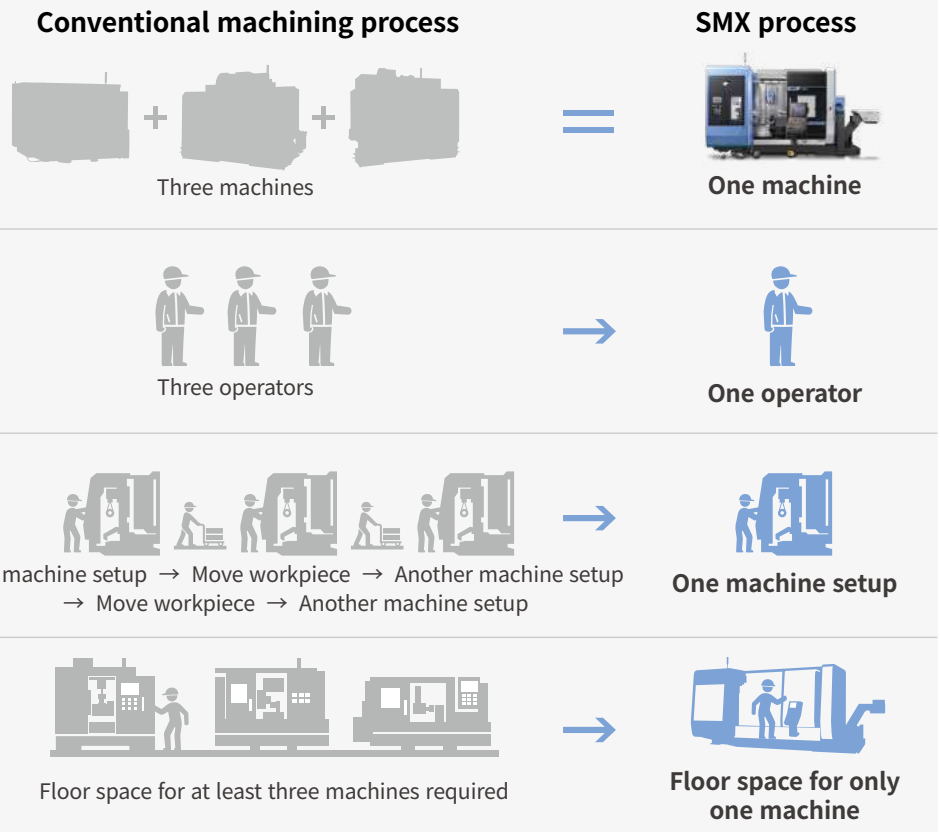


Providing complex 5-axis machining capabilities (Standard with FANUC 31i-B5 Plus control)

Simultaneous 5-axis machining functions such as TCP* are built-in, making the machining of complex shapes (i.e. automotive engine impellers or aero-engine blades), much easier and faster to produce.


Smooth tool center point control

- Facilitating the high precision machining of a surface by automatic control of the tool path
- Reducing the time required for setups and for completion of the machining process

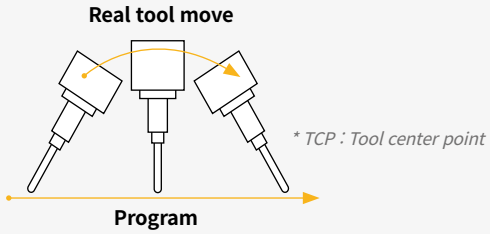













Cutting point command OPTION

- Increasing productivity by automatically making all necessary compensations when using various tool tips without having to change the machining program
- Performing effective tool correction

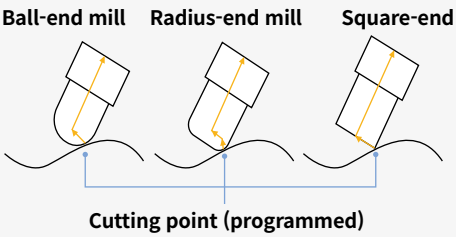

Various applications

Just one machine! The SMX series can satisfy all your machining requirements. Investing in SMX machine seriously boosts your production capabilities and dramatically improves your performance.

Turning	 O.D. cutting	 U-Drilling	 I.D. cutting	 I.D. threading
Milling	 O.D. milling	 O.D. hole machining	 Ball-end milling	 Angular machining
Right spindle	 Parting off	 Face cutting	 Angular machining	 End face hole machining and tapping

Typical applications - 1

A wide range of applications requiring high-performance machining

The sophisticated machining capabilities of SMX machines enable a wide range of applications, across various industries, to be machined to high precision. Specific industries include -: aerospace, energy, shipbuilding, medical, etc.



Drill bits
Industry I Energy
Size I D165 X D175
Material I Stainless steel
Tools I 15



Shaft
Industry I Energy
Size I D150 X L350
Material I Aluminum
Tools I 14



Die roller
Industry I Medical
Size I D185 X L330
Materiall I Aluminum
Tools I 9



Valve
Industry I General
Size I D300 X L450
Material I Stainless steel
Tools I 6

Typical applications - 2

A wide range of applications requiring high-precision machining

Stable control technology and excellent levels of accuracy enable delicate and detailed workpieces to be machined to high precision.



Housing
Industry I General
Size I D150 X L300
Material I Aluminum
Tools I 6



Impeller
Industry I Aerospace
Size I D120 X L80
Material I Aluminum
Tools I 6



Barrel
Industry I Electronics
Size I D70 X L50
Material I Aluminum
Tools I 50



Bucket Blade
Industry I Energy
Size I 85t x D120 x L600
Material I Stainless steel
Tools I 8

ERGONOMIC DESIGN


Ease-of-use and operator convenience - all part of the machines' ergonomic design.

Ease of machine setup

By laying out the operation panel and tool magazine in a user-friendly way, tooling and workpiece setup becomes more efficient.

Award



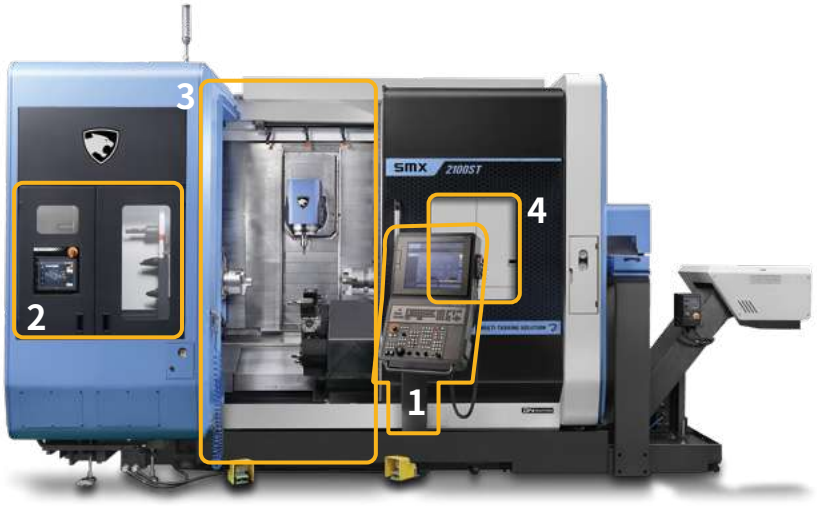

1

Operation panel with side-to-side movement, swivel action and adjustable height setting

Model	Swivel angel adjustment	Height adjustment	Left/Right movement
SMX 2100/ 2100B	0~100°	0~150mm (0~5.9inch)	panel stand rotating (50°)
SMX 2600/3100	0~90°	0~190mm (0~7.5inch)	1350mm (53.1inch)



2


Convenient front located tool magazine layout, ATC operation panel

Easy tool loading, managing and monitoring with touch screen.

3

Low-height bed cover structure for easy internal access

Fast and convenient setup and maintenance through improved ergonomic accessibility .

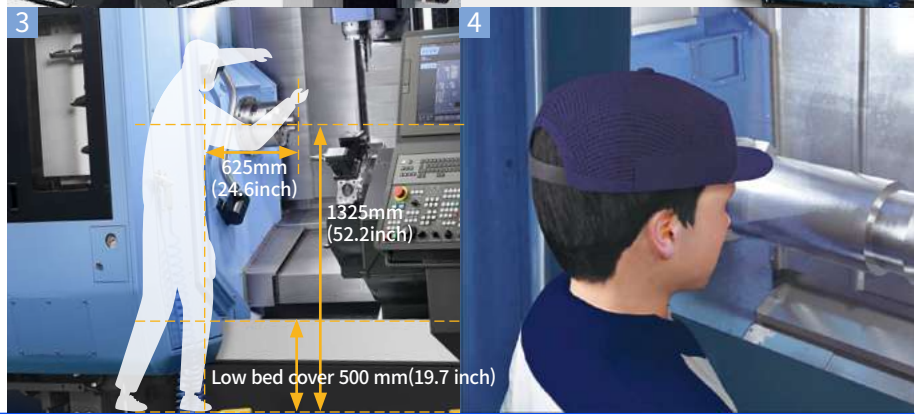

4


Extended front window

Enables the operator to easily monitor the machining process.

Safety design to reduce collision-caused damage

Machine airbag function

The machine airbag minimizes damage in the event of a machine collision. Sudden changes in axis loads etc., are detected and willl trigger the airbag's deployment.

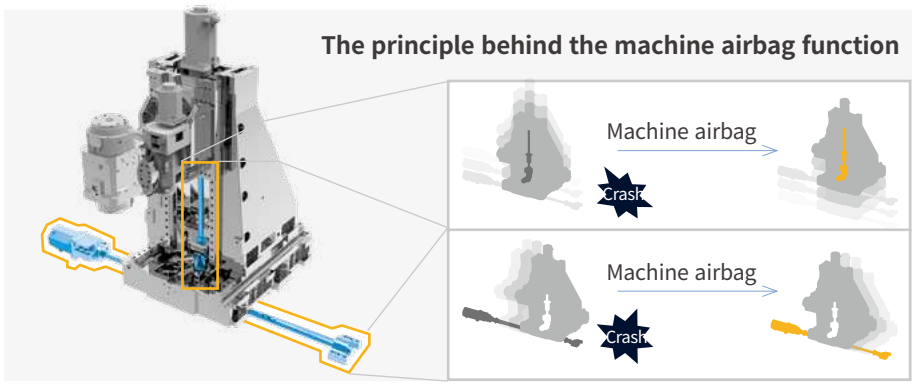

CUSTOMIZED USER-FRIENDLY FLEXIBLE OPERATION SOLUTIONS

CUFOS is a PC based control system created by DN Solutions. equipped with intuitive user-friendly functions such as a smart phone screen and easy customization, CUFOS helps to improve operational efficiency and performance for the user.

FEATURES

19 inch TOUCHSCREEN
- Program memory : 40GB
- App-based Interface like smart phone, tablet PC

EASY PROGRAMMING
- Sketch cycle : Gear skiving, Gear hobbing, Polygon turning (continuously being added…)
- SSD data server : Program file sharing/ managing (CF card/ USB/External PC)

EASY SET-UP/OPERATION
- Tool management for SMX
- CPS(collision protection system)
- Manual viewer
- File manager & PDF viewer

EASY MAINTENANCE
- Status monitor
- Alarm guidance
- Maintenance manager

CUFOS

for SMX ser.



SKETCH CYCLE

Easy and quick, but powerful programming for complex machining

Sketch cycle is easy-to-use conversational programming software that make a support to code complex shapes and machining processes such as gear skiving, hobbing and polygon turning.



Advangages

- Easy to use even for beginners with conversational programming by advising workpiece shapes, tool information and machining conditions
- Expensive CAM software is not required
- Reduce coding time by up to 70% while minimizing trial and errors
- Enable to utilize the recent high productivity processing program such as gear skiving



Gear skiving

Gear skiving is carried out in 5 axis machines for more flexible and productive gear machining. The complete component can be finished in one machine, which shorten productiontime and reduce handling and logistics cost.







Gear hobbing

Gear hobbing make it easy to proceed gear machining with general turning centers. Gear machining programs can be created by the simple conversational programming so program coding and set-up time can be saved dramatically.








Polygon turning

Polygon turning is a machining process which allows noncircular forms(polygons) to be machine turned without interrupting the rotation of workpieces. It allows rapid production and clean machining of advanced geometries.





EASY SET-UP | OPERATION

Tool management, collision protection between machine unit/ workpiece/tooling and various user guidance provide higher productivity and user-convenience.

Tool management

DN Solutions EZ work tool management






Includes a summary monitoring screen and gives the operator easy access to DN Solutions's own tool management system which provides comprehensive real time data on each tool, such as remaining tool life and status of tool groups.

CPS (Collision protection system)

A function to prevent real-time collision between the tool and equipment / machine elements inside the working area.

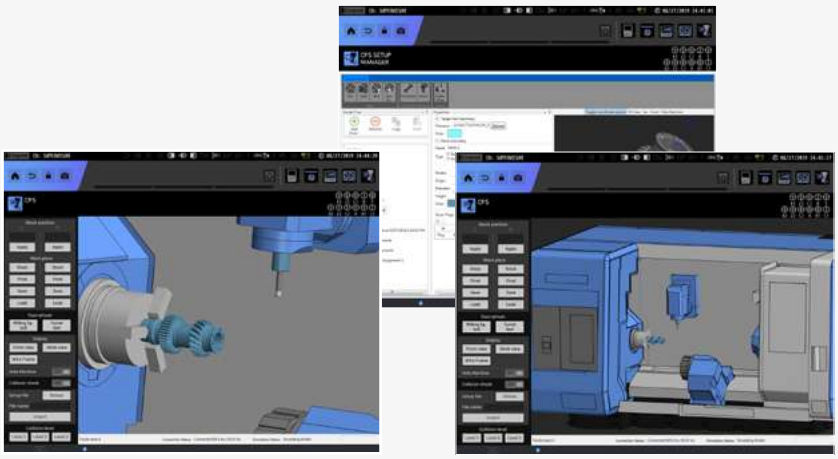

Use the setup manager with the CPS app to build up the machine model, and add tool, workpiece and workholding equipment details.

File Manager & PDF viewer

Ability to transfer various type of files including CF cards, USB memory, external PCs and memory inside CUFOS, NC programs between NC memory. PDF drawings can be directly open on the screen via PDF viewer



EASY MAINTENANCE

Keeping a machine in best condition through status monitoring, alarm guidance and maintenance manager functions.

Status monitoring

Monitoring various information such as spindle, milling spindle, feed axis, cycle time, program/tool no. on one screen.



Alarm guidance

Presenting an operator alarm's causes and troubleshooting guides and sending an email when the alarm last for a long time.



Maintenance manager

Monitors the status of machine and control elements, and confirms the alarm condition and maintenanceschedule for preventative maintenance.



CUFOS: STANDARD | OPTIONAL SPECS

A diverse range of functions and apps are available to meet your needs.

Description	Features		SMX series
Hardware	Display Unit	19" Color LCD Screen	●
	Main RAM Memory	8GB	●
	Program Storage Memory	SSD 256GB	●
	2 point-touch panel port		●
	Windows 7 operating system		●
Applications	DN Solutions Tool Management		○
	CPS(Collision Protection System)		●
	SSD Data server application (40GB)		●
	Set and Inspection Application(Renishaw)		○
	Manager's Message Notification application		●
	FTP Server service		●
	Smart key access control application		○
	Memo Application		●
	Machine status Monitor application		●
	Alarm guidance application		●
	Sketch Cycle		○
	Alarm Notification via email		●
iHMI Basic Application	Manual viwer application		●
	Calendar application		●
	Browser application		●
	Periodic Maintenance Application		●
	Data Logger application		●
	Servo viewer application		●

● *Standard* ○ *Optional*

CUFOS-FANUC 31i-B PLUS

CUFOS-FANUC 31i-B Plus maximizes customer productivity and convenience.



19" Touch screen + New OP

DN Solutions Fanuc 31iB/B5 Plus' operatio n panel enhances operating convenience by incorporating common-design buttons and layout. It features a Qwerty keyboard for fast and easy data input and operation.

CUFOS-FANUC 31i-B Plus

- 19-inch color display
- Intuitive and user-friendly design

USB and PCMCIA card QWERTY keyboard

- EZ-Guide i standard
- Ergonimic operator panel
- Hot keys ▪ Enhance AICC BLOCK
- Touch pen provided as standard

iHMI touchscreen

iHMI provides an intuitive interface that uses a touchscreen for quick and easy operation.

Range of applications

Providing various applications related to planning, machining, improvement and utility, for customer convenience.



NUMERIC CONTROL SPECIFICATIONS

FANUC

Description	Item	Specifications	SMX2100(L), SMX 2600, 3100(L) CUFOS-FANUC 31i-B	SMX2100(L)S, SMX 2600S, 3100(L)S CUFOS-FANUC 31i-B	SMX2100(L)ST, SMX 2600ST, 3100ST CUFOS-FANUC 31i-B	SMX2100(L), SMX 2600, 3100(L) CUFOS-FANUC 31i-B5	SMX2100(L)S, SMX 2600S, 3100(L)S CUFOS-FANUC 31i-B5	SMX2100(L)ST, SMX 2600ST, 3100ST CUFOS-FANUC 31i-B5
Controlled axis	Controlled axes	Note *1) {Z2} could be supplied as Servo Steady Rest option except for T/ST type.	7 (X, Z, C, B, Y, A, {Z2})	8 (X, Z, C1, B, Y, C2, A, {Z2})	9 (X1, Z1, C1, B, Y, X2, Z2, C2, A)	7 (X, Z, C, B, Y, A, {Z2})	8 (X, Z, C1, B, Y, C2, A, {Z2})	9 (X1, Z1, C1, B, Y, X2, Z2, C2, A)
	Simultaneously controlled axes		4 axes(Upper X, Z, C, Y) + 1 axes(Lower {Z2})	4 axes(Upper X, Z, C1, Y) + 3 axes(Lower {Z2}, C2, A)	4 axes(Upper X1, Z1, C1, Y) + 4 axes(Lower X2, Z2, C2, A)	5 axes(Upper X, Z, C, B, Y) + 1 axes(Lower {Z2})	5 axes(Upper X, Z, C1, B, Y) + 3 axes(Lower {Z2}, C2, A)	5 axes(Upper X1, Z1, C1, B, Y) + 4 axes(Lower X2, Z2, C2, A)
Data input/ output	Fast data server		○	○	○	○	○	○
	Memory card input/output		✪	✪	✪	✪	✪	✪
	USB memory input/output		●	●	●	●	●	●
	Larger capacity memory_2GB	not CUFOS only (15" display)	✪	✪	✪	✪	✪	✪
	SSD data server	CUFOS only (19" display)	●	●	●	●	●	●
Interface function	Embedded Ethernet		●	●	●	●	●	●
	Fast Ethernet		○	○	○	○	○	○
	Enhanced Embedded Ethernet function		●	●	●	●	●	●
Operation	DNC operation	Included in RS232C interface.	●	●	●	●	●	●
	DNC operation with memory card	G5.1 Q_, 600 Blocks	●	●	●	●	●	●
Feed function	AI contour control II							
	AI contour control II	G5.1 Q_, 1000 Blocks	●	●	●	●	●	●
	High-speed smooth TCP		X	X	X	●	●	●
Operation Guidance Function	EZ Guide i (Conversational Programming Solution)		●	●	●	●	●	●
	iHMI with Machining Cycle		●	●	●	●	●	●
	EZ Operation package		●	●	●	●	●	●
Setting and display	CNC screen dual display function		●	●	●	●	●	●
Network	FANUC MTConnect		✪	✪	✪	✪	✪	✪
	FANUC OPC UA		✪	✪	✪	✪	✪	✪
Others	Display unit (Note *2)	15" color LCD with Touch Panel	✪	✪	✪	✪	✪	✪
		19" color LCD with Touch Panel	●	●	●	●	●	●
	Part program storage size & Number of registerable programs	1280M(512KB)_1000 programs	X	X	X	X	X	X
		2560M(1MB)_1000 programs	X	X	X	X	X	X
		5120M(2MB)_1000 programs	X	X	X	X	X	X
		10240M(4MB)_1000 programs	●	●	●	●	●	●
		20480M(8MB)_1000 programs	○	○	○	○	○	○
		10240M(4MB)_4000 programs	○	○	○	○	○	○
		20480M(8MB)_4000 programs	○	○	○	○	○	○

*Note *2) CUFOS specification have 19" color LCD with Touch Panel*

● *Standard* ○ *Optional* X *N/A* ✪ *Available*

CONVENIENT OPERATION

CUFOS-FANUC 31i-B Plus

EZ WORK function

Tool load monitoring, Setup guide, Status monitoring, Operation and Recovery guide can provide more convenience and efficiency incresing for user operation.



Tool load monitoring

Real-time tool load monitoring and display various tooling information.





Operation and Recovery guide

Provides step-by-step operation guides and help so even unskilled users can operate it safely and easily.



Thermal Compensation


Improve the machining precision through temperature sensor detection and deflection compensation of the structure in real-time.



Status monitoring

Real-time confirmation of machine operation abnormality for effective maintenance using actuator/sensor base operation status notifications.



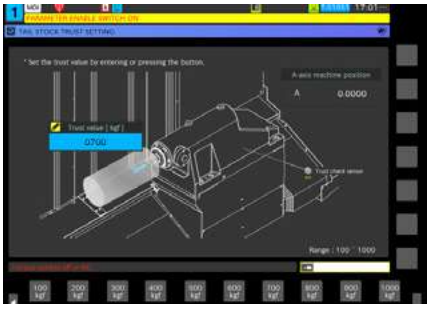



Setup guide

Displays the operation status up to now and guides the next step when setting up the machine.

CONVENIENT OPERATION

SINUMERIK ONE




21.5 inch display + New OP


Two path programs are displayed simultaneously in the large 21.5-inch screen for enhanced user convenience.

- 21.5-inch display
- 6GB user memory
- USB (standard)
- QWERTY keyboard

Convenient conversational functionality



Shopmill / Shopturn



Tool load monitoring




Measuring cycle



Intelligent kinematic compensation function



Temperature compensation function



Collision avoidance function

NUMERIC CONTROL SPECIFICATIONS

SIEMENS

Description	Item	Specifications	STD SONE	S SONE	ST SONE
Controlled axis	Controlled axes		X1, Z1, Y1, B1, C1, C3, W1, MG1, MG2, ARM,SH	X1, Z1, Z3, Y1, B1, C1, C2, C3, W1, MG1, MG2, ARM,SH	X1, X2, Z1, Z2, Z3, Y1, B1, C1, C2, C3, C4, MG1, MG2, MG3, ARM,SH
	Simultaneously controlled axes		5 axes	5 axes	5 axes
Data input/output	Memory card input/output		X	X	X
	USB memory input/output		●	●	●
Interface function	Ethernet	(X130)	●	●	●
Operation	On network drive	(without EES option, Extcall)	●	●	●
	On USB storage medium, e.g. memory stick	(without EES option, Extcall)	●	●	●
Program input	Workpiece coordinate system	G54 - G59, G507 - G599	●	●	●
Feed function	Advanced surface		●	●	●
	Top surface		○	○	○
	Look ahead number of block		1000	1000	1000
Programming & editing function	3D simulation, finished part		●	●	●
	Simultaneous recording		●	●	●
	DXF reader for pC integrated in SINUMERIK operate		○	○	○
Operation guidance function	Shopturn		●	●	●
	EZ operation package		●	●	●
Setting and display	Operation via a VNC viewer		●	●	●
Network	MTConnect		✪	✪	✪
	OPCUA		○	○	○
Others	Display unit	19" color display without touch screen(SW4.9)	X	X	X
		21.5" color display with touch screen(SW4.9)	●	●	●
	Part program storage size	CNC user memory 10 MB	●	●	●
		CNC user memory 100 MB	○	○	○
		CNC user memory 6GB	○	○	○
		CNC user memory 40GB (with PCU or IPC)	○	○	○
		CNC user memory without limit (Execution from extenal storage devices) (EES / Using by USB or network)	○	○	○
		HMI user memory	●	●	●

● *Standard* ○ *Optional* *X N/A* ✪ *Available*

STANDARD | OPTIONAL SPECIFICATIONS

A range of options is available to suit individual requirements.

Description	Specifications		SMX 2100/L	SMX 2100S/LS	SMX 2100ST/LST	SMX 2100B	SMX 2100SB	SMX 2100STB
Tool shank	CAPTO C6		●	●	●	●	●	●
	HSK-A63		○	○	○	○	○	○
Automatic tool changer	7" operation touch panel		●	●	●	●	●	●
	10.4" operation touch panel (including a camera in the magazine)		○	○	○	○	○	○
Tool magazine	40 tools		●	●	●	●	●	●
	80 tools		○	○	○	○	○	○
	120 tools		○	○	○	○	○	○
Milling Spindle	12000 r/min		●	●	●	●	●	●
	20000 r/min (Fanuc only)		○	○	○	○	○	○
Low turret	12 stations turning		X	X	●	X	X	●
	12 stations turn-milling (BMT55P, 5000 r/min)		X	X	○	X	X	○
	12 stations turn-milling (BMT55P, 10000 r/min(Fanuc only))		X	X	○	X	X	○
	12 stations /24 Positioning turn-milling (BMT55P, 5000 r/min)		X	X	○	X	X	○
	12 stations/24 Positioning turn-milling(BMT55P, 10000 r/min(Fanuc only))		X	X	○	X	X	○
Work holding device	Left spindle	Hydraulic chuck 8"	●	●	●	X	X	X
		Hydraulic chuck 10"	○	○	○	●	●	●
		Hydraulic chuck 12"	X	X	X	○	○	○
	Right spindle	Hydraulic chuck 8"	X	●	●	X	●	●
		Hydraulic chuck 10"	X	○	○	X	○	○
	Dual pressure chucking (High pressure / Low pressure)		○	○	○	○	○	○
	Chuck clamp & Unclamp confirmation		●	●	●	●	●	●
	Servo driven steady rest (Z-movement)	SLU-3 (Ø14 ~ Ø152)	X	X	○	X	X	○
		SLU-3.1 (Ø20 ~ Ø165)	○	○	○	○	○	○
		SLU-3.2 (Ø50 ~ Ø200)	○	○	X	○	○	X
		SLU-4 (Ø30 ~ Ø245)	○	○	X	○	○	X
		SLU-5 (Ø45 ~ Ø310)	○	○	X	○	○	X
		STA-3 (Ø12 ~ Ø152)	X	X	○	X	X	○
		STA-3.1 (Ø20 ~ Ø165)	○	○	○	○	○	○
		STA-3.2 (Ø50 ~ Ø200)	○	○	X	○	○	X
		STA-4 (Ø35 ~ Ø245)	○	○	X	○	○	X
		STA-5 (Ø45 ~ Ø310)	○	○	X	○	O	X
		AX4E, AX4I (Ø12~Ø160)	○	○	X	○	○	X
		AX5E, AX5I (Ø20~Ø200)	○	○	X	○	○	X
		AX6E, AX6I (Ø30~Ø255)	○	○	X	○	○	X
		AX7E, AX7I (Ø45~Ø320)	○	○	X	○	○	X
Coolant	T-T-C (Milling spindle)	Pressure 1.0MPa (145 psi)/ Element filter	●	●	●	●	●	●
		Pressure 3.0MPa (435 psi)/ Cyclone filter	○	○	○	○	○	○
		Pressure 7.0MPa (1015 psi) / Cyclone filter	○	○	○	○	○	○
		Pressure 7.0MPa (1015 psi)/Paper filter	○	○	○	○	○	○
		MQL (Minimum quantity lubrication) system	○	○	○	○	○	○
	For Lower turret	Pressure 0.45MPa (65.2psi) / Tank screen filter	X	X	●	X	X	●
		Pressure 0.7 / 1.0 / 1.45 Mpa(101.5/145/151.1 psi)/ Tank screen filter	X	X	○	X	X	○
	Oil skimmer		○	○	○	○	○	○
	Coolant pressure switch (Standard for milling spindle / option for lower turret)		●	●	● (lower turret : ○)	●	●	● (lower turret : ○)
	Lower turret coolant filter		X	X	○	X	X	○
	Coolant level switch : Sensing level - Low		○	○	○	○	○	○
Chip disposal	Chip conveyor (Right disposal)		○	○	○	○	○	○
	Chip bucket		○	○	○	○	○	○
	Air blower (for Left or Right spindle chuck)		●	●	●	●	●	●
	Chuck coolant (for Leftor Right spindle chuck)		○	○	○	○	○	○
	Through spindle air shower (Left or Right)		○	○	○	○	○	○
	Through spindle coolant (Left or Right)		○	○	○	○	○	○
	Shower coolant (0.75kW, 85 liter/min)		○	○	○	○	○	○
	Coolant gun		○	○	○	○	○	○
	Air gun		○	○	○	○	○	○
	Mist collector		○	○	○	○	○	○
High accuracy	Thermal compensation		●	●	●	●	●	●
	Ball screw core cooling (X-axis)		●	●	●	●	●	●
	Ball screw core cooling (Y/Z-axis)		○	○	○	○	○	○
	Water soluble Coolant Chiller**		○	○	○	○	○	○
	Linear scale (X1-axis)		○	○	○	○	○	○
	Linear scale (X2-axis)		X	X	○	X	X	○
	Linear scale (Y / Z-axis)		○	○	○	○	○	○
	Oil cooler cooling flow detector		○	○	○	○	○	○
Measurement	Auto tool setter(Milling spindle,Touch)		○	○	○	○	○	○
	Auto tool setter(Milling spindle, Non-contact, NC4 or BLUM)		○	○	○	○	○	○
	Auto tool setter (Low turret)		X	X	○	X	X	○
	Removable tool setter (Low turret)		X	X	○	X	X	○
	Auto workpiece measurement (RMP60)		○	○	○	○	○	○
Automation	Parts unloader and conveyor(both left & right spindle direction, pocket type or gripper type)		X	○	○	X	○	○
	Workpiece ejector (TSC/TSA selectable)		X	○	○	X	○	○
	Bar feeder interface		○	○	○	○	○	○
	Robot interface		○	○	○	○	○	○
	Automatic front door (with safety device)		○	○	○	○	○	○
Others	DN Solutions tool monitoring system		●	●	●	●	●	●
	Rotay type window wipe		○	○	○	○	○	○
	Intelligent kinematic compensation for multi-tasking (Software customized by DN Solutions)		●	●	●	●	●	●
	Intelligent kinemetic compensation for multi-tasking(Datum ball gage)		○	○	○	○	○	○
	Quick change tooling(Low turret, CAPTO)		X	X	○	X	X	○
	AUTOMATIC POWER OFF		○	○	○	○	○	○
	Display unit size	15 inch(FANUC)	○	○	○	○	○	○
		19 inch(CUFOS-FANUC)	●	●	●	●	●	●
		21.5 inch(Siemens)	●	●	●	●	●	●
	ADDITIONAL PORTABLE MPG		●	●	●	●	●	●
Standardaccessories	Foundation bolt for anchoring		●	●	●	●	●	●
Customized special option	Air limit sensing on chuck_Preparation		○	○	○	○	○	○
	Tool setter extension for special chuck (Low turret)		X	X	○	X	X	○
	Left/Right spindle air curtain		○	○	○	○	○	○
	Coolant for milling spindle_Multi pressure		○	○	○	○	○	○
	Tool ID check system_Manual		○	○	○	○	○	○
	Additional work light for ATC magazine		○	○	○	○	○	○
	Angular head for milling spindle_ATC		○	○	○	○	○	○

● Standard ○ Optional X N/A

Description	Specifications		SMX 2600	SMX 3100	SMX 3100B/835	SMX 3100L	SMX 2600S	SMX 3100S	SMX 3100LS	SMX 2600ST	SMX 3100ST
Tool shank	CAPTO C6		●	●	●	●	●	●	●	●	●
	HSK-T63		○	○	○	○	○	○	○	○	○
Automatic tool changer	7" operation touch panel		●	●	●	●	●	●	●	●	●
	10.4" operation touch panel (including a camera in the magazine)		○	○	○	○	○	○	○	○	○
Tool magazine	40 tools		●	●	●	●	●	●	●	●	●
	80 tools		○	○	○	○	○	○	○	○	○
	120 tools		○	○	○	○	○	○	○	○	○
Tool magazine for long tool	3 tools		X	X	X	○	X	X	○	X	X
Low turret	12 stations turning		X	X	X	X	X	X	X	●	●
	12 stations turn-milling (BMT65P)		X	X	X	X	X	X	X	○	○
Work holding device	Left spindle	Hydraulic chuck 10"	●	X	X	X	●	X	X	●	X
		Hydraulic chuck 12"	○	●	●	●	○	●	●	○	●
		Hydraulic chuck 15"	X	○	○	○	X	○	○	X	○
	Right spindle	Hydraulic chuck 10"	X	X	X	X	●	●	●	●	●
		Hydraulic chuck 12"	X	X	X	X	○	○	○	○	○
	Dual pressure chucking (High pressure / Low pressure)		○	○	○	○	○	○	○	○	○
	Chuck clamp & Unclamp confirmation		○	○	○	○	○	○	○	○	○
	Servo driven steady rest (Z-movement)	SLU-3 (Ø14~Ø152)	X	X	X	X	X	X	X	○	○
		SLU-3.1 (Ø20~Ø165)	○	○	X	○	○	○	○	○	○
		SLU-3.2 (Ø50~Ø200)	○	○	X	○	○	○	○	○	○
		SLU-4 (Ø30~Ø245)	○	○	X	○	○	○	○	X	X
		SLU-5 (Ø45~Ø310)	○	○	X	○	○	○	○	X	X
		SLU-5.1 (Ø85~Ø350)	X	X	X	○	X	X	○	X	X
		K5.0 (Ø80~Ø390)	X	X	X	○	X	X	○	X	X
		K5.1 (Ø100~Ø410)	X	X	X	○	X	X	○	X	X
		STA-3 (Ø12~Ø152)	X	X	X	X	X	X	X	○	○
		STA-3.1 (Ø20~Ø165)	○	○	X	○	○	○	○	○	○
		STA-3.2 (Ø50~Ø200)	○	○	X	○	○	○	○	○	○
		STA-4 (Ø30~Ø245)	○	○	X	○	○	○	○	X	X
		STA-5 (Ø45~Ø310)	○	○	X	○	○	○	○	X	X
		STA-5.1 (Ø85~Ø350)	X	X	X	○	X	X	○	X	X
		AX4E, AX4I (Ø12~Ø160)	○	○	X	○	○	○	○	X	X
		AX5E, AX5I (Ø20~Ø200)	○	○	X	○	○	○	○	X	X
		AX6E, AX6I (Ø30~Ø255)	○	○	X	○	○	○	○	X	X
		AX7E, AX7I (Ø45~Ø320)	○	○	X	○	○	○	○	X	X
		AX8E, AX8I (Ø85~Ø360)	○	○	X	○	○	○	○	X	X
Coolant	T-T-C (Milling spindle)	Pressure 1.0MPa (145 psi)/ Element filter	●	●	●	●	●	●	●	●	●
		Pressure 3.0MPa (435 psi)/ Cyclone filter	○	○	○	○	○	○	○	○	○
		Pressure 7.0MPa (1015 psi) / Cyclone filter	○	○	○	○	○	○	○	○	○
		Pressure 7.0MPa (1015 psi)/Paper filter	○	○	○	○	○	○	○	○	○
		MQL (Minimum quantity lubrication) system	○	○	○	○	○	○	○	○	○
	For Lower turret	Pressure 0.45MPa (65.2psi) / Tank screen fiter	X	X	X	X	X	X	X	●	●
		Pressure 0.7 / 1.0 / 1.45 MPa (101.5/145/151.1 psi) / Tank screen fiter	X	X	X	X	X	X	X	○	○
	Oil skimmer		○	○	○	○	○	○	○	○	○
	Coolant pressure switch (Standard for milling spindle / option for lower turret)		●	●	●	●	●	●	●	●	●
	Lower turret coolant filter		X	X	X	X	X	X	X	○	○
	Coolant level switch : Sensing level - Low		○	○	○	○	○	○	○	○	○
Chip disposal	Chip conveyor (Right disposal)		○	○	○	○	○	○	○	○	○
	Chip bucket		○	○	○	○	○	○	○	○	○
	Air blower (for Left or Right spindle chuck)		●	●	●	●	●	●	●	●	●
	Chuck coolant (for Leftor Right spindle chuck)		○	○	○	○	○	○	○	○	○
	Through spindle air shower (Left or Right)		○	○	○	○	○	○	○	○	○
	Through spindle coolant (Left or Right)		○	○	○	○	○	○	○	○	○
	Shower coolant (0.75kW, 85 liter/min)		○	○	○	○	○	○	○	○	○
	Coolant gun		○	○	○	○	○	○	○	○	○
	Air gun		○	○	○	○	○	○	○	○	○
	Mist collector		○	○	○	○	○	○	○	○	○
High accuracy	Thermal compensation		●	●	●	●	●	●	●	●	●
	Ball screw core cooling (X-axis)		●	●	●	●	●	●	●	●	●
	Ball screw core cooling (Y/Z-axis)		○	○	○	○	○	○	○	○	○
	Water soluble Coolant Chiller*		○	○	○	○	○	○	○	○	○
	Linear scale (X1-axis)		○	○	○	●	○	○	●	○	○
	Linear scale (X2-axis)		X	X	X	X	X	X	X	○	○
	Linear scale (Y / Z-axis)		○	○	○	○	○	○	○	○	○
	Oil cooler cooling flow detector		○	○	○	○	○	○	○	○	○
Measurement	Auto tool setter(Milling spindle,Touch)		○	○	○	○	○	○	○	○	○
	Auto tool setter(Milling spindle, Non-contact, NC4 or BLUM)		○	○	○	○	○	○	○	○	○
	Auto tool setter (Low turret)		X	X	X	X	X	X	X	○	○
	Removable tool setter (Low turret)		X	X	X	X	X	X	X	○	○
	Auto workpiece measurement (RMP60)		○	○	○	○	○	○	○	○	○
Automation	Parts unloader and conveyor(pocket type or gripper type)		X	X	X	X	○	○	X	○	○
	Workpiece ejector (TSC/TSA selectable)		X	X	X	X	○	○	X	○	○
	Bar feeder interface		○	○	○	○	○	○	○	○*	○*
	Automatic front door (with safety device)		○	○	○	○	○	○	○	○	○
Others	DN Solutions tool monitoring system		●	●	●	●	●	●	●	●	●
	Rotay type window wipe		○	○	○	○	○	○	○	○	○
	Intelligent kinemetic compensation for multi-tasking (Software customized by DN Solutions)		●	●	●	●	●	●	●	●	●
	Intelligent kinemetic compensation for multi-tasking(Datum ball gage)		○	○	○	○	○	○	○	○	○
	Quick change tooling(Low turret, CAPTO)		X	X	X	X	X	X	X	○	○
	Display unit size	15 inch(Fanuc)	○	○	○	○	○	○	○	○	○
		19 inch(Fanuc, CUFOS)	●	●	●	●	●	●	●	●	●
		21.5 inch(Siemens)	●	●	●	●	●	●	●	●	●
Standard accessories	Foundation bolt for anchoring		●	●	●	●	●	●	●	●	●
Customized special option	Air limit sensing on chuck_Preparation		○	○	○	○	○	○	○	○	○
	Tool setter extension for special chuck		X	X	○	X	X	X	X	○	○
	Main/Left spindle air curtain		○	○	○	○	○	○	○	○	○
	Sub/Right spindle air curtain		X	X	X	X	○	○	○	○	○
	Coolant for milling spindle_Multi pressure		○	○	○	○	○	○	○	○	○
	Tool ID check system_Manual		○	○	○	○	○	○	○	○	○
	Additional work light for ATC magazine		○	○	○	○	○	○	○	○	○
	Angular head for milling spindle_ATC		○	○	○	○	○	○	○	○	○

** Technical consultation is mandatory for the chilling of non-water soluble coolant*

● *Standard* ○ *Optional* X *N/A*

※ Please contact your DN Solutions representative for detailed machine information.

※ When using a semi-synthetic type or synthetic type, contact our sales representative or service center in advance.

Fire Safety Precautions | There is a high risk of fire when using non-water-soluble cutting fluids, processing flammable materials, neglecting the controlled and careful use of coolants and modifying the machine without the consent of the manufacturer. Always check the SAFETY GUIDELINES carefully before using the machine.

PERIPHERAL EQUIPMENT


Tailstock application for lower turret OPTION

- Steady rest to support long and slim components, and for improving machining stability
- Tailstock application for lower turret is available for SMX 2600ST/3100ST. OPTION



Tool setter (Automatic) OPTION

Auto linear motion type tool setter has been installed for tool measurement and tool wear detection. It is stored in a safe location during the machining process, and can be activated with the workpiece still in place in the chuck with no interference.

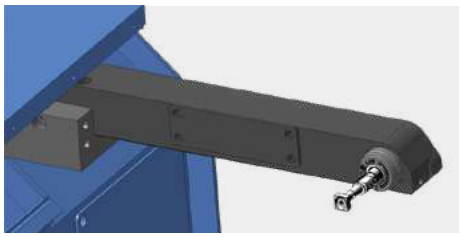

Gear skiving solutions

Dramatic improvements in productivity for gear skiving solutions such as power skiving, invo-milling and hobbing are available - enabling high-precision external / internal gear machining in a single setup.



** Please contact to DN Solutions on further information.*

Linear scales OPTION

Linear scales are ideal for high accuracy simultaneous 5-axis machining, long machining runs and operation, and higher feed precision.

Quick change CAPTO OPTION

The quick change tool system simplifies tool change operations. Recommended for users who need to change tools frequently or to reduce set-up times.



** Lower turret applicable*


Servo-driven steady rest OPTION

Steady rests support long workpieces during the machining process. Linear positioning of the steady rest is achieved by the servo motor and ball screw and can be positioned in cycle.

Steady rest parking function*

When you don't want to use the steady rest, you can park it under the left chuck.




** This function is available for the SMX 3100L/LS. The steady rest will be from the following SLU5.1, K5.0 and K5.1.*

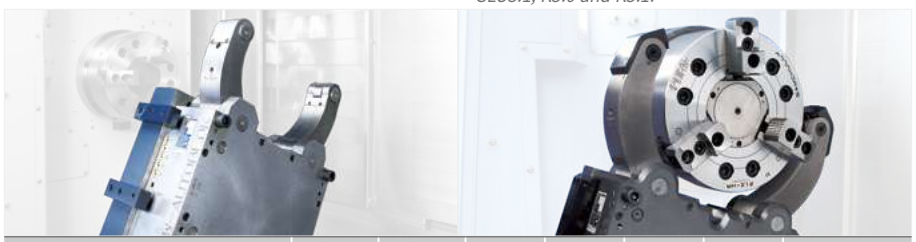

Servo-driven steady rest	SMX 2100/S/L/ LS/B/SB	SMX 2100ST/ LST/STB	SMX 2600/S	SMX 2600ST	SMX 3100/S	SMX 3100ST	SMX 3100L/LS
SLU-3.1 / STA-3.1 (Ø20~Ø165mm)	○	-	○	-	○	-	○
SLU-3.2 / STA-3.2 (Ø50~Ø200mm)	○	-	○	-	○	-	○
SLU-4 / STA-4 (Ø35~Ø245mm)	○	-	○	-	○	-	○
SLU-5 / STA-5 (Ø45~Ø310mm)	○	-	○	-	○	-	○
SLU5.1 / STA-5.1 (Ø85~Ø350mm)	-	-	-	-	-	-	○ (Parking function)
K 5.0 (Ø80~Ø390mm)	-	-	-	-	-	-	○ (Parking function)
K 5.1 (Ø100~Ø410mm)	-	-	-	-	-	-	○ (Parking function)
Lower turret_SLU-3 (Ø14~Ø152mm)	-	○	-	○	-	○	-
Lower turret_STA-3 (Ø12~Ø152mm)	-	○	-	○	-	○	-
Lower turret_SLU-3.1 / STA-3.1 (Ø20~Ø165mm)	-	○	-	○	-	○	-
Lower turret_SLU3.1 / STA-3.2 (Ø50~Ø200mm)	-	-	-	○	-	○	-
AX4E, AX4I (Ø12~Ø160)	○	-	○	-	○	-	○
AX5E, AX5I (Ø20~Ø200)	○	-	○	-	○	-	○
AX6E, AX6I (Ø30~Ø255)	○	-	○	-	○	-	○
AX7E, AX7I (Ø45~Ø320)	○	-	○	-	○	-	○
AX8E, AX8I (Ø85~Ø360)	-	-	○	-	○	-	○


Chip conveyor (Right side exit) OPTION

The conveyor provides a superior chip removal system and has a stable structure for easy maintenance and reduced leakage. By selecting the correct type of conveyor, the efficiency of the machine is increased.

Name	Hinge belt	Magnetic scraper	Drum filter + Hinge scraper (Double type)
Application	For steel	For castings	For steel, castings, nonferrous metal
Features	• General • Appropriate for a heavy material chip of more than 30 mm in length	• Easy maintenance • Eject the chip by scraping and raising the chip with the scraper	• Appropriate for both a long and a short chip • Filtering coolant
Shape			

Coolant chiller (Recommendation) OPTION

Coolant chiller is highly recommended to prevent temperature rise and minimize thermal deformation, when using a water-insoluble coolant or high-pressure coolant system of which the power is over 1.5 kw.

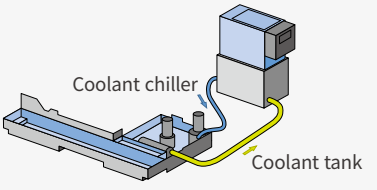

Optional equipment for automation

OPTION

Peripheral equipment is available to support the SMX improve its performance and productivity.


- Bar feeder interface
- Parts unloader and conveyor
- Workpiece ejector
- Robot automation




POWER | TORQUE

FANUC 31i-B Plus


Left _SMX 2100/S/ST/L/LS/LST
Right_SMX 2100S/ST/LS/LST/SB/STB

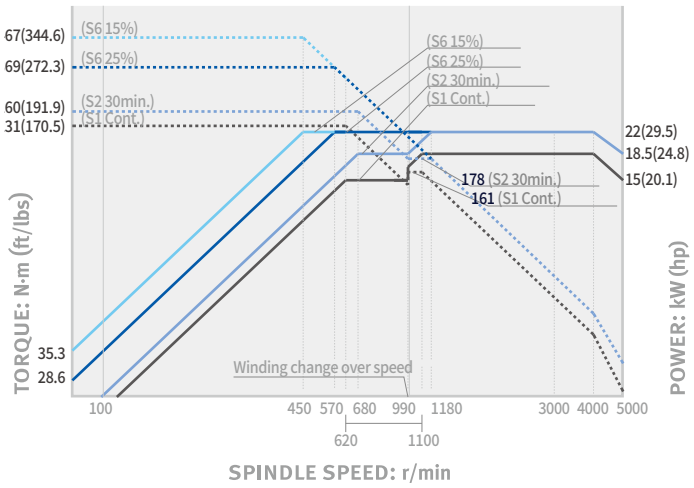


Left _SMX 2100B/SB/STB

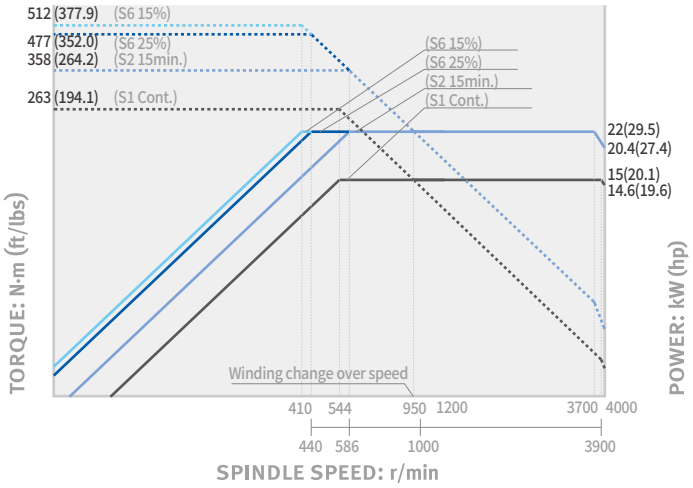


Rotary tool for lower turret (Milling) OPTION
SMX 2100S/ST/LS/LST/SB/STB_5000 r/min

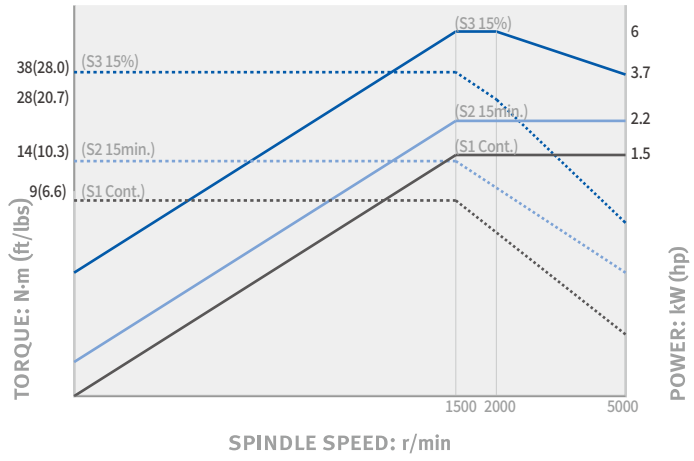


Rotary tool for lower turret (Milling) OPTION
SMX 2100ST/LST/STB_10000 r/min

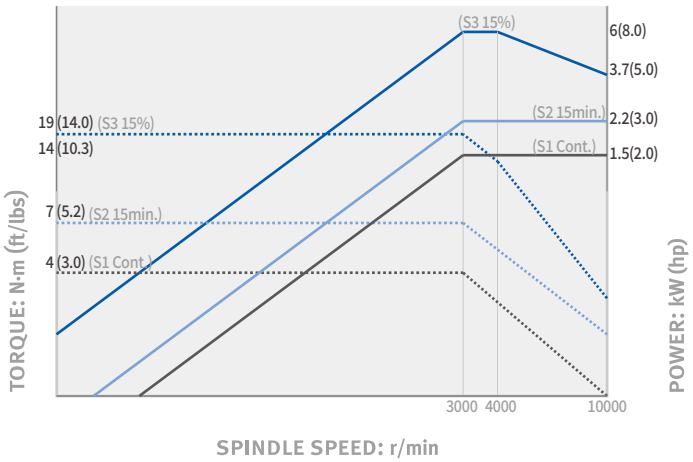

Milling
SMX 2100/S/ST/L/LS/LST/B/SB/STB

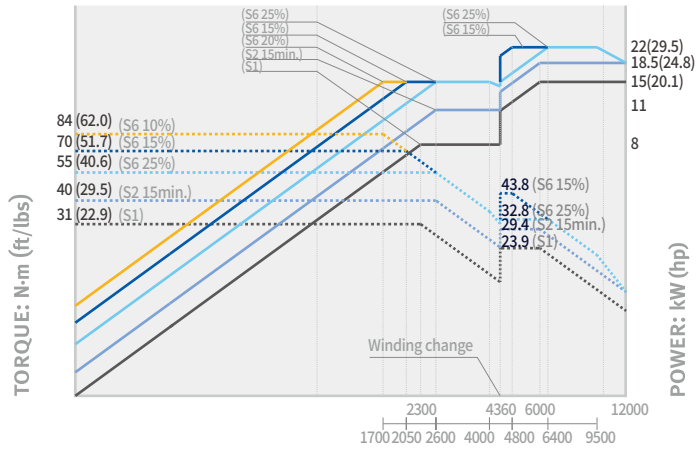

Milling
SMX 2100/S/ST/L/LS/LST/B/SB/STB_20000 r/min

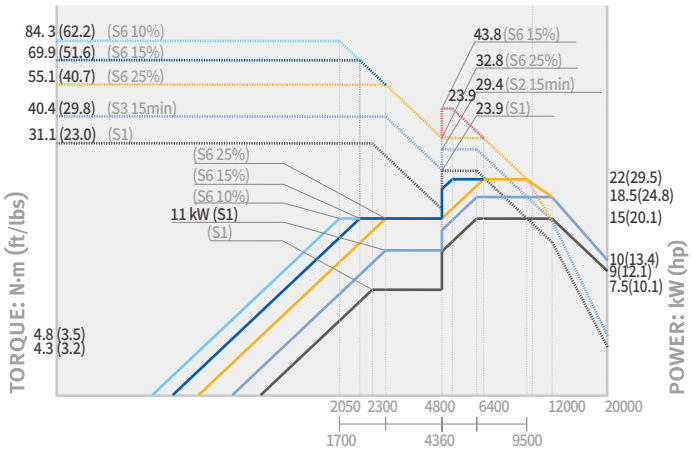


POWER | TORQUE

FANUC 31i-B Plus


Left

SMX 2600/S/ST

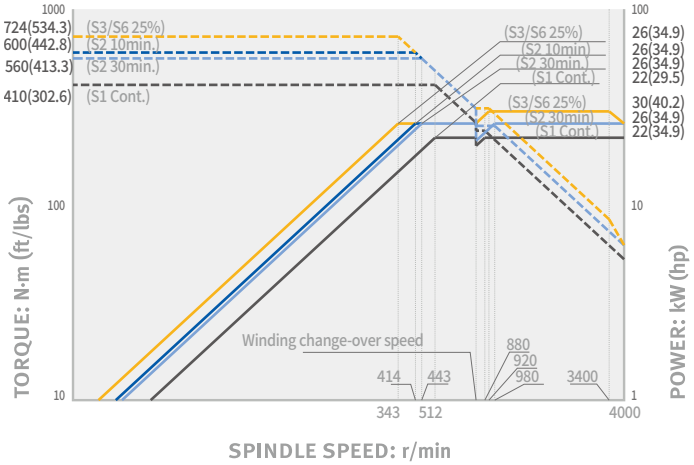


Left

SMX 3100/L/S/LS/ST

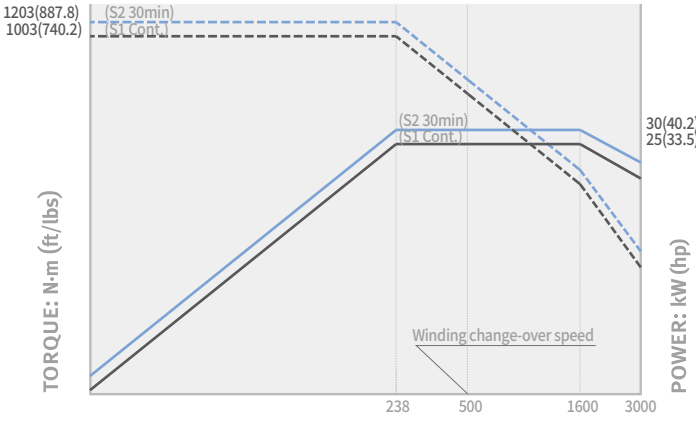


Right

SMX 2600S/ST · 3100S/LS/ST

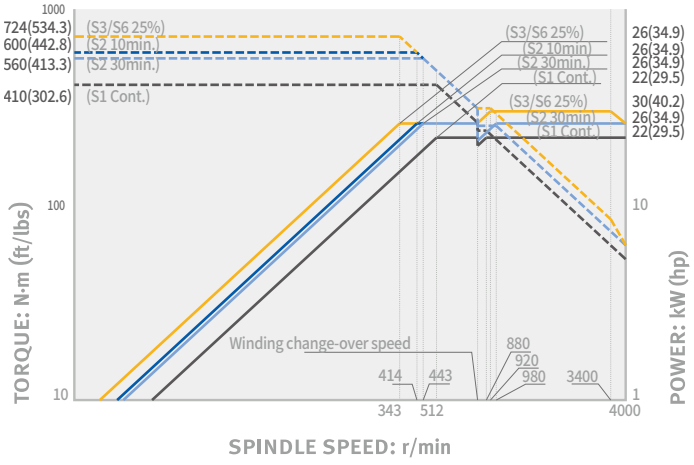


Left

SMX 3100B/835

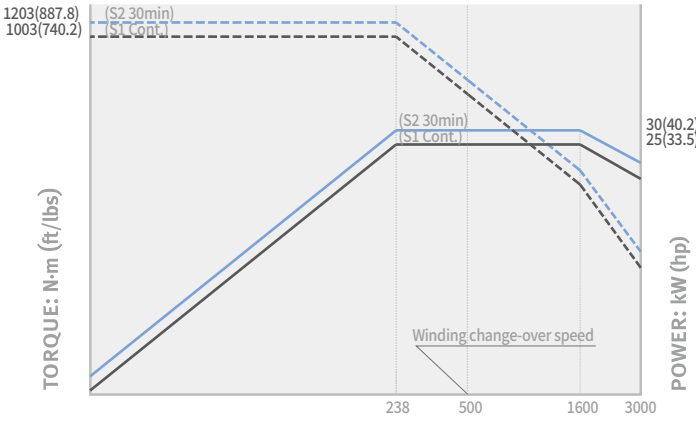


Milling

SMX 2600/S/ST · 3100/L/S/LS/ST · SMX 3100B/835

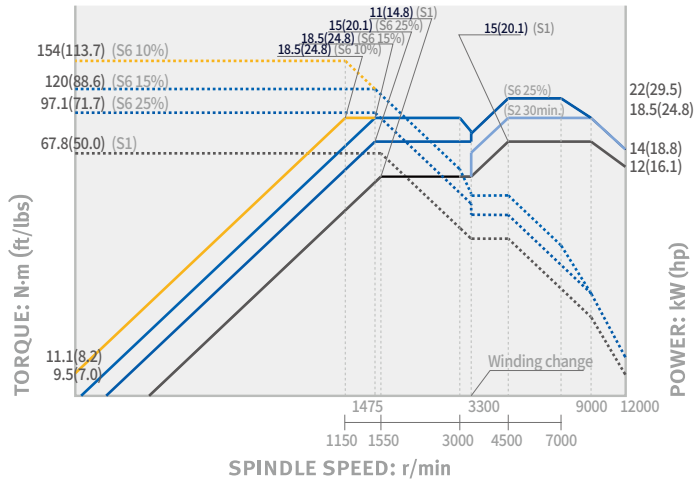

Rotary tool for lower turret (Milling)

SMX 2600ST · 3100ST

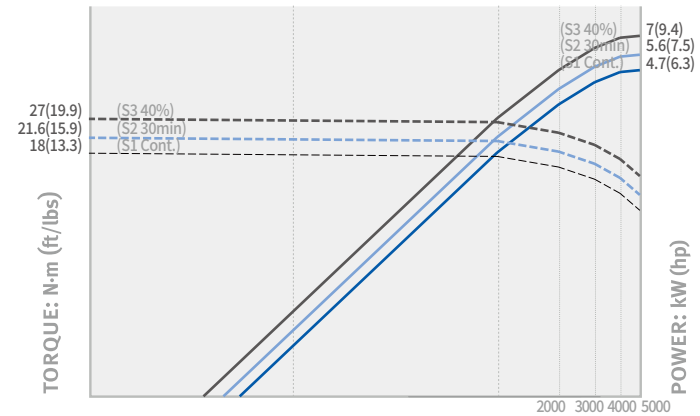


POWER | TORQUE

SIEMENS


Left

SMX 2600/S/ST

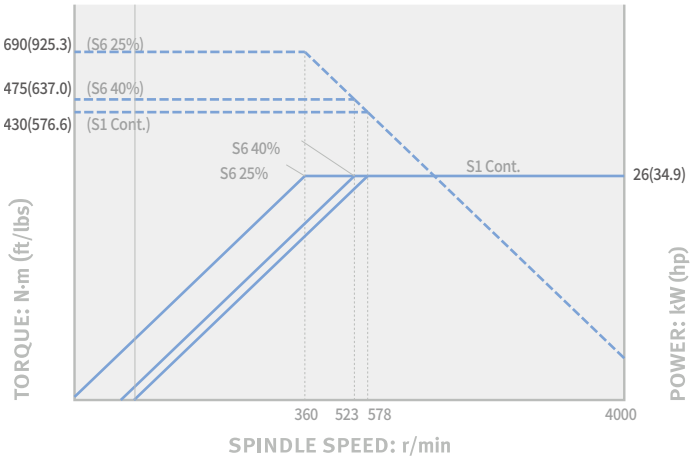


Left

SMX 3100/L/S/LS/ST

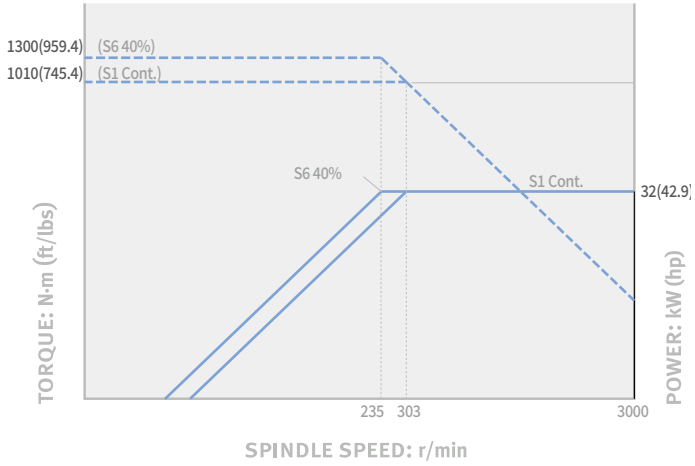


Right

SMX 2600S/ST · 3100S/LS/

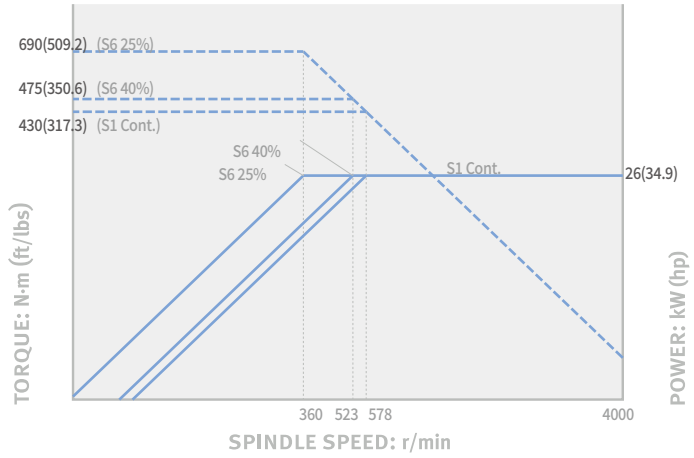


Milling

SMX 2600/S/ST · 3100/L/S/LS/ST

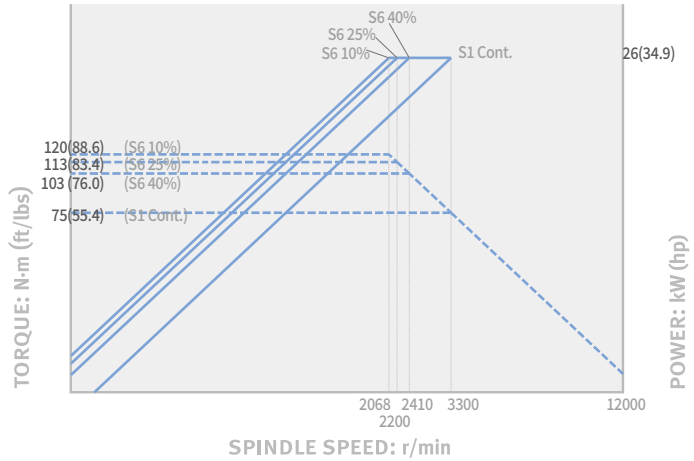

Lower turret

SMX 2600ST · 3100ST

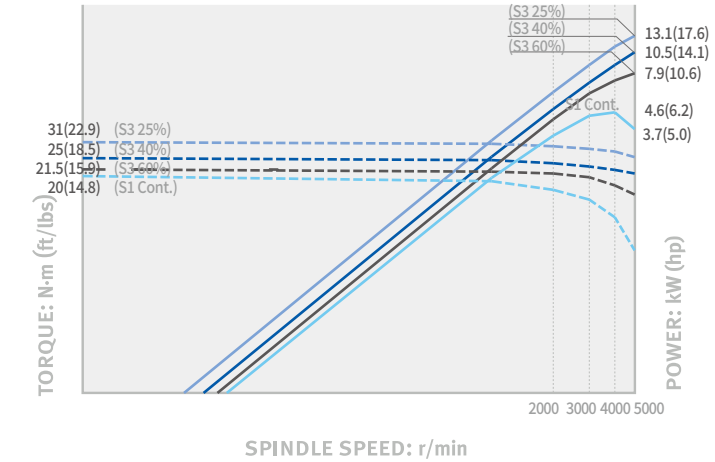


TOOL INTERFACE


SMX 2100ST· 2100STB

Unit : mm (inch)


For turning
(12 stations)

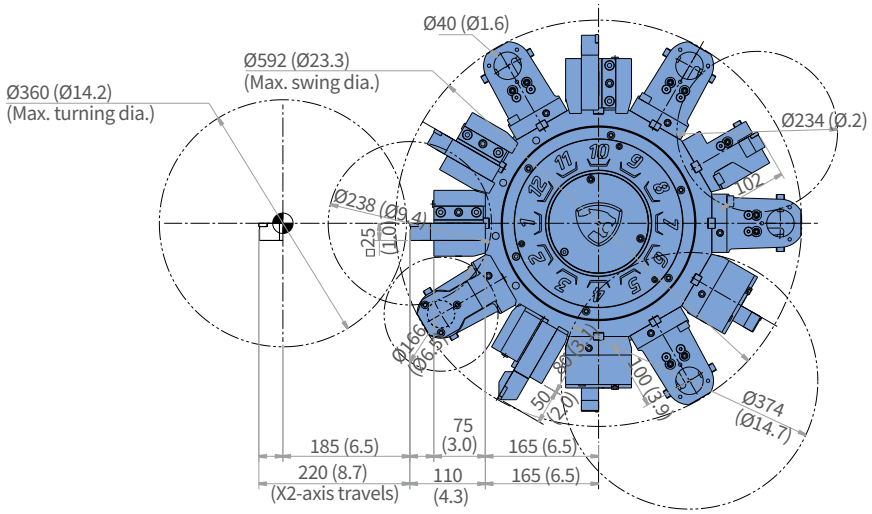

For turn-milling OPTION
(12 stations, BMT55P)

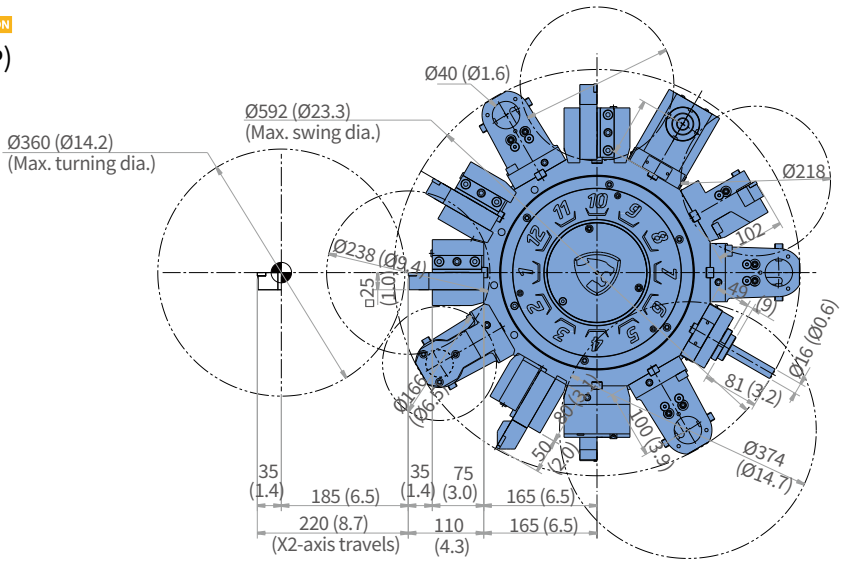

For turn-milling OPTION
(12 stations, 24indexing BMT55P)

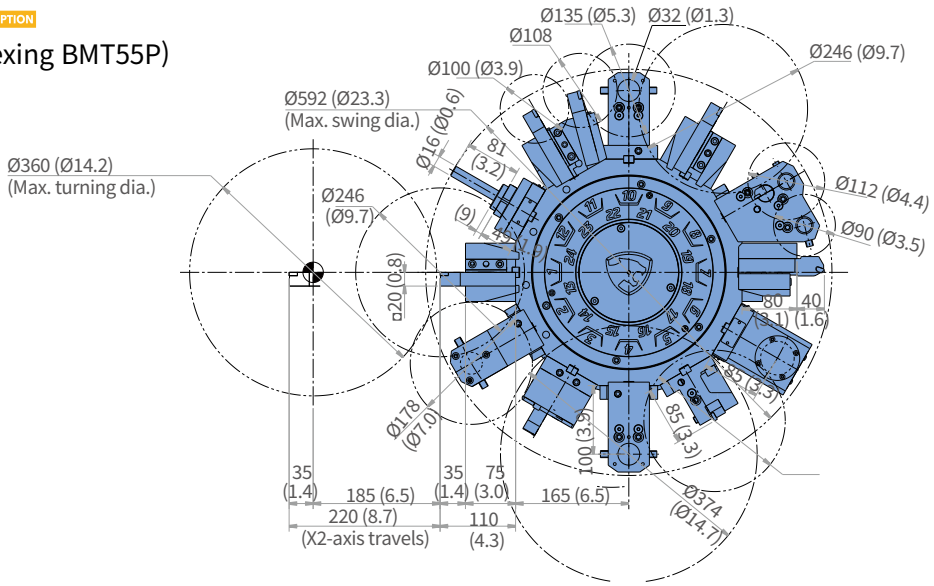


TOOL INTERFACE


SMX 2100/S/ST/B/SB/STB

Unit : mm (inch)

For turning
(12 stations)

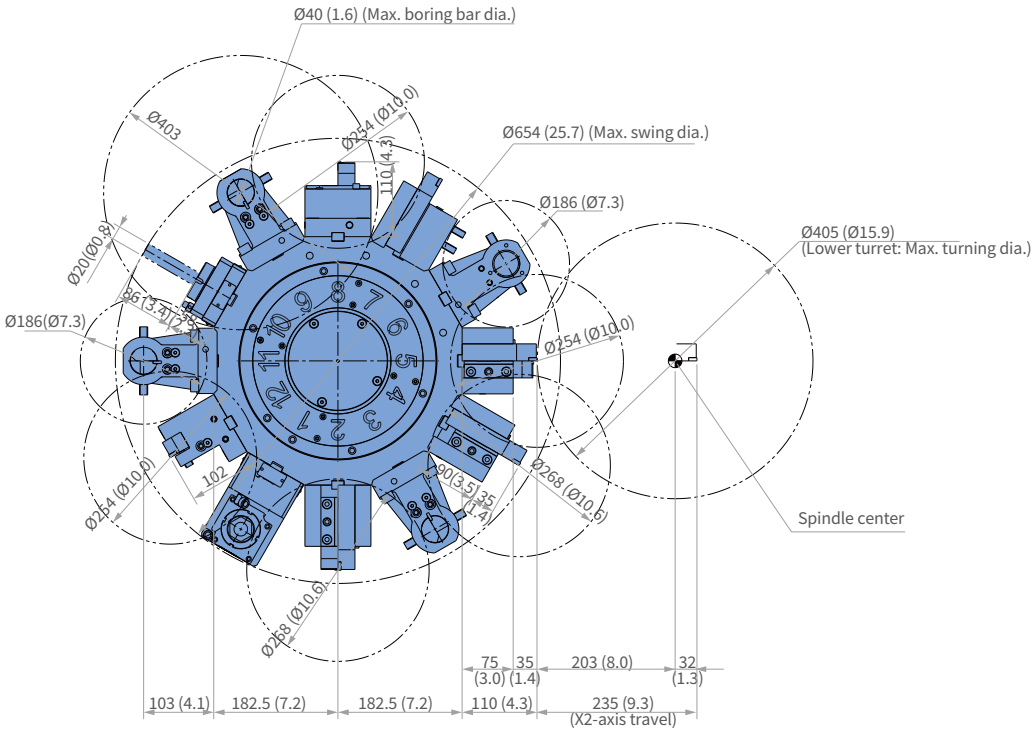

For turn-milling OPTION
(12 stations, BMT65P)

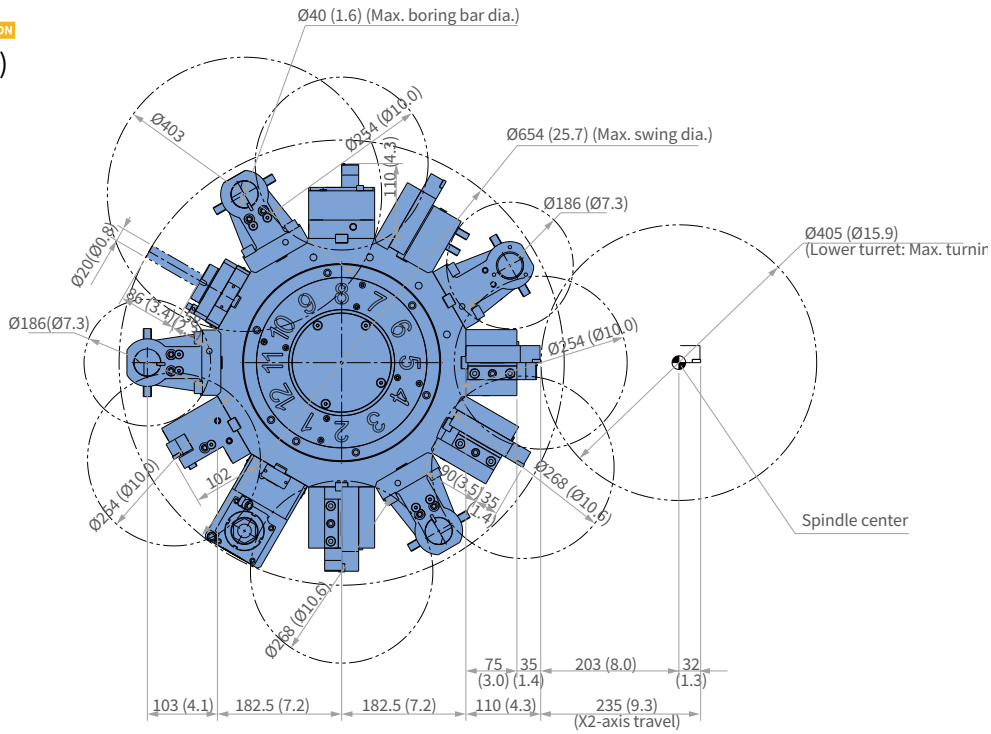


EXTERNAL DIMENSIONS


SMX 2100/S/ST/B/SB/STB

Unit : mm (inch)

TOP

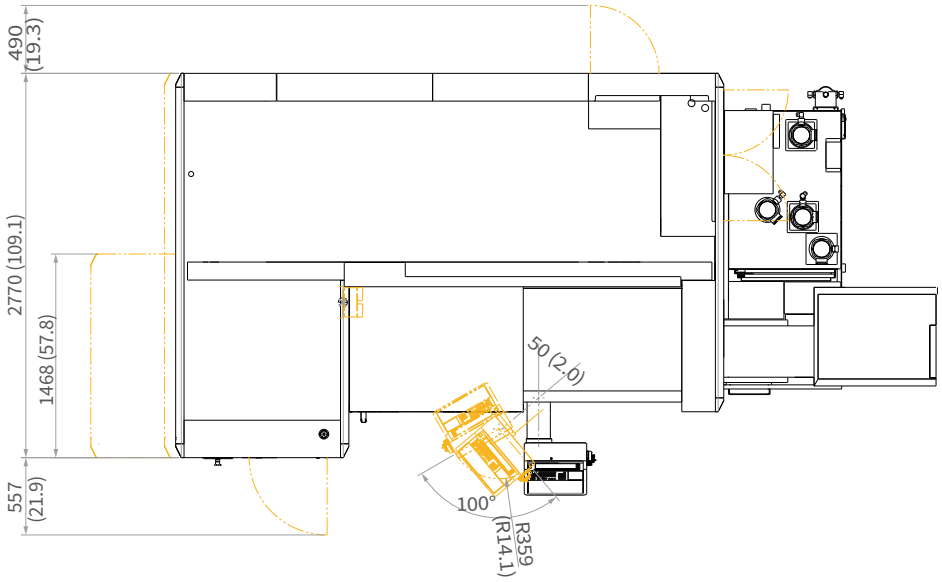

FRONT

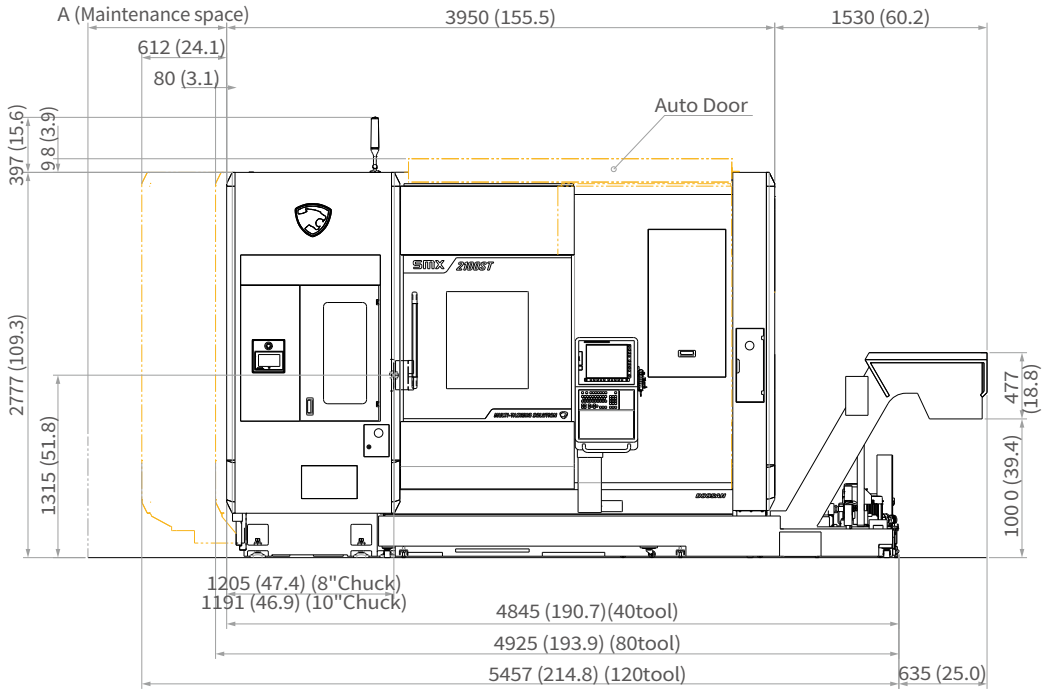

Maintenance space	A
40 tool	1000 (39.4)
80 tool	1080 (42.5)
120 tool	1612 (63.5)

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time.
The anchor bolts and other related parts for foundation work are supplied as standard
items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.


** Some peripherals can be placed in different locations.*

EXTERNAL DIMENSIONS


SMX 2100L

Unit : mm (inch)

TOP

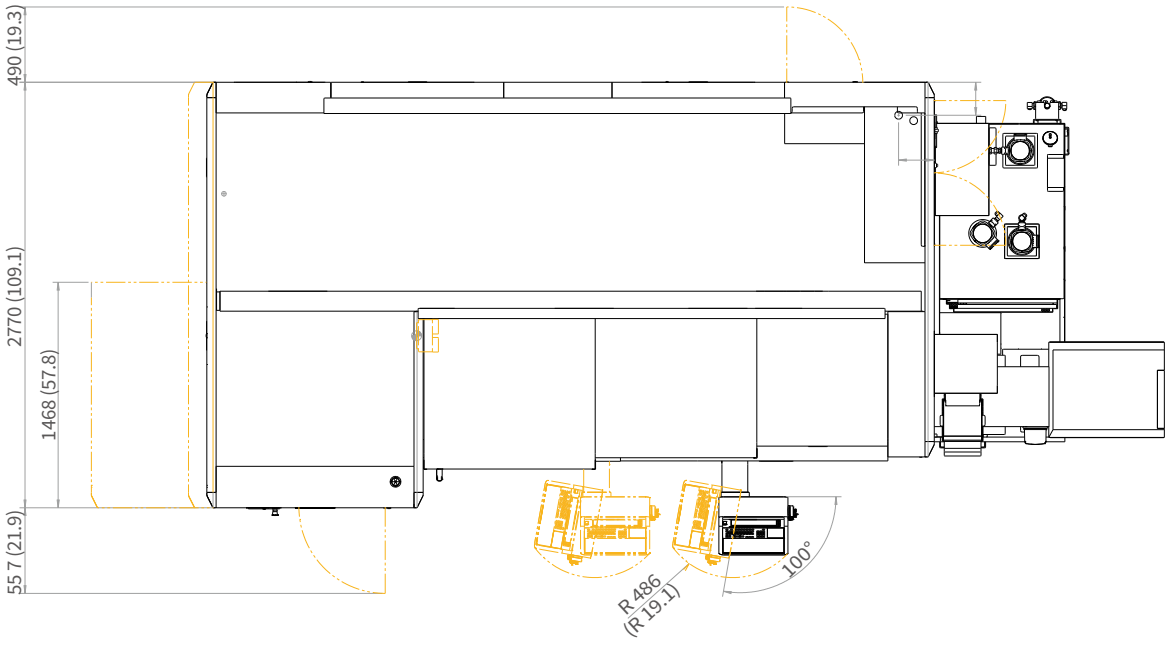

FRONT

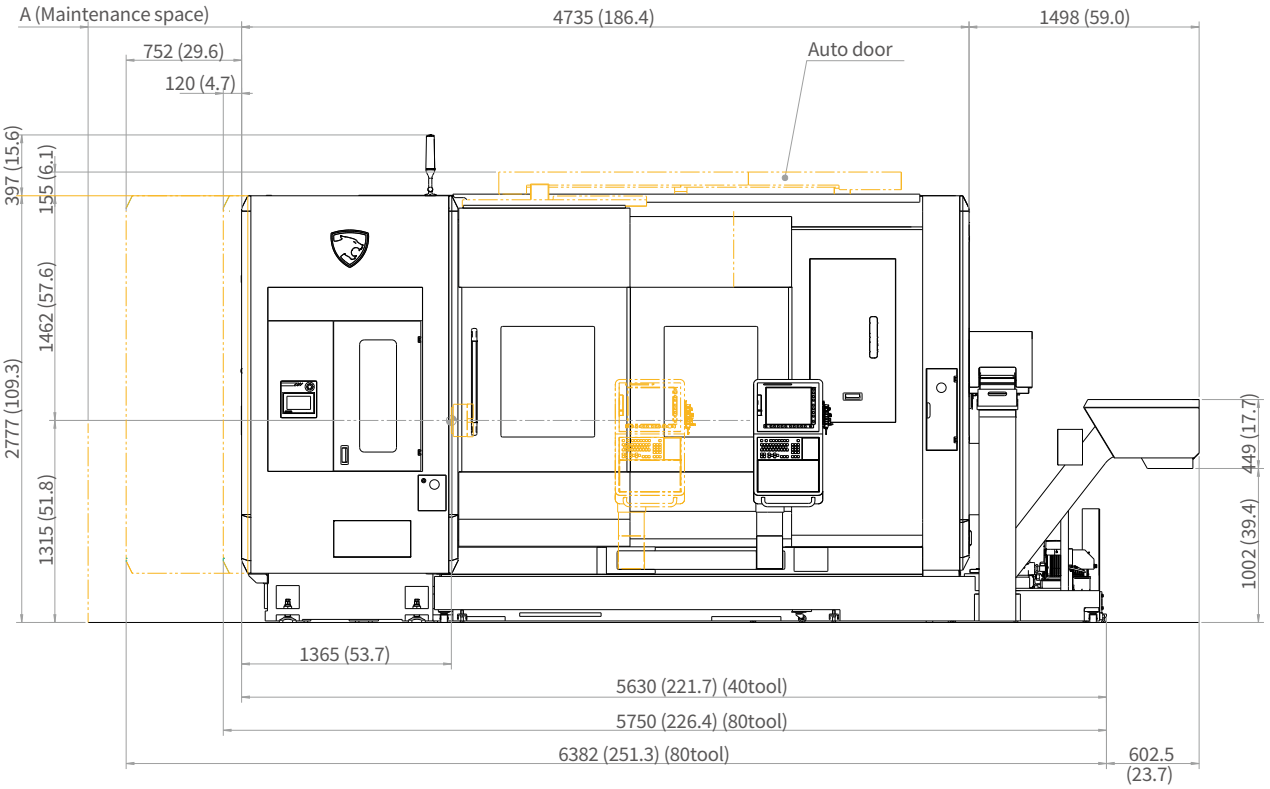

Maintenance space	A
40 tool	1000 (39.4)
80 tool	1120 (44.1)
120 tool	1752 (69.0)

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time.
The anchor bolts and other related parts for foundation work are supplied as standard
items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.


** Some peripherals can be placed in different locations.*

EXTERNAL DIMENSIONS


SMX 2600/S

Unit : mm (inch)

TOP

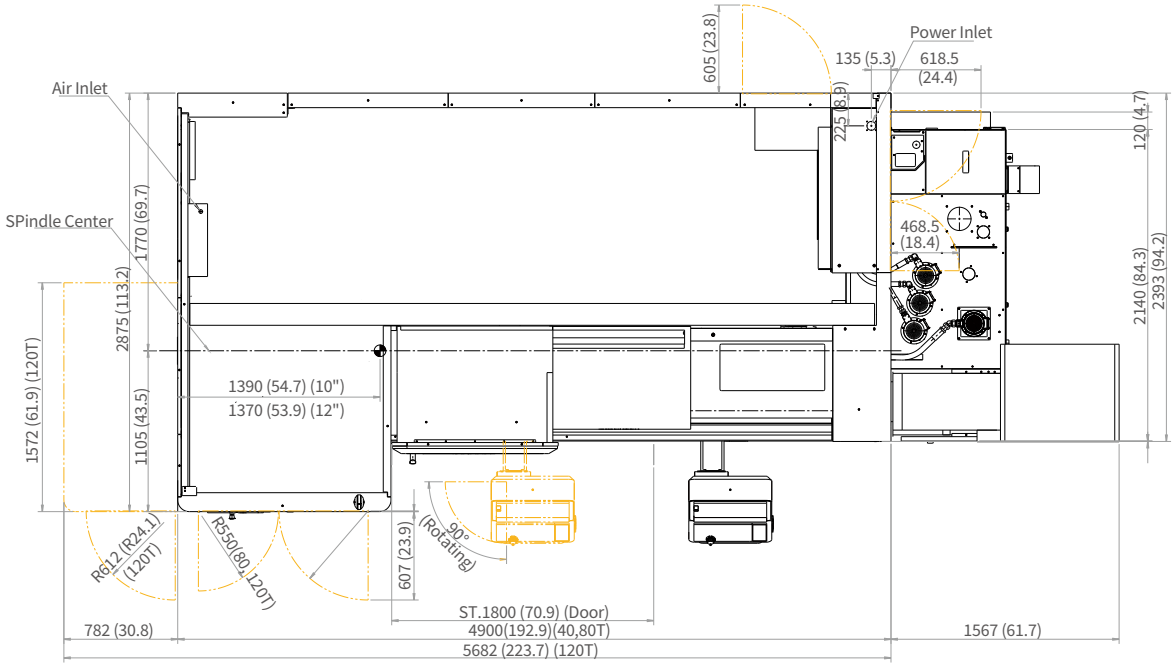

FRONT

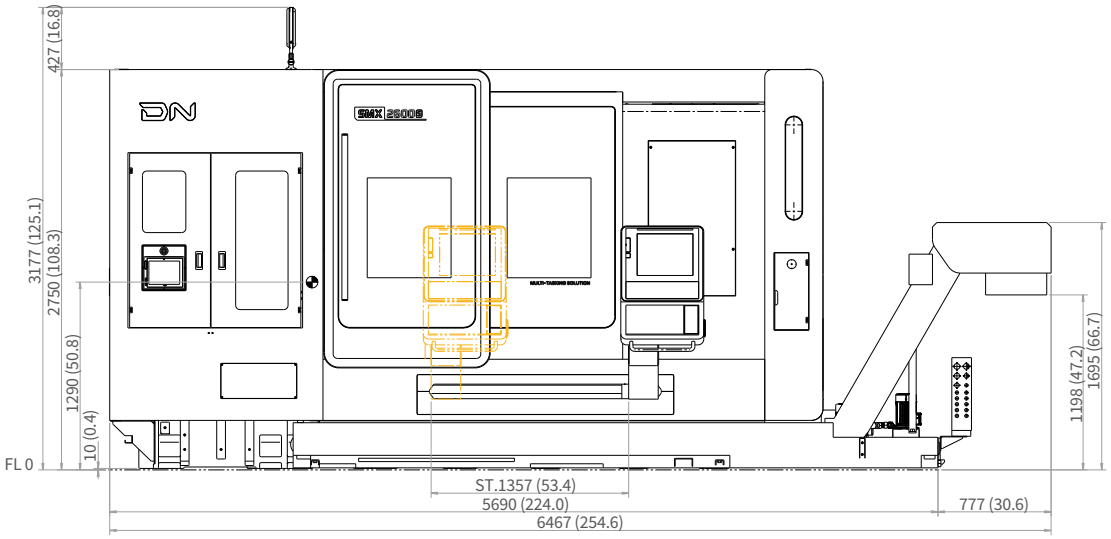

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time.
The anchor bolts and other related parts for foundation work are supplied as standard
items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.


** Some peripherals can be placed in different locations.*

EXTERNAL DIMENSIONS


SMX 3100/L/S/LS

Unit : mm (inch)

TOP

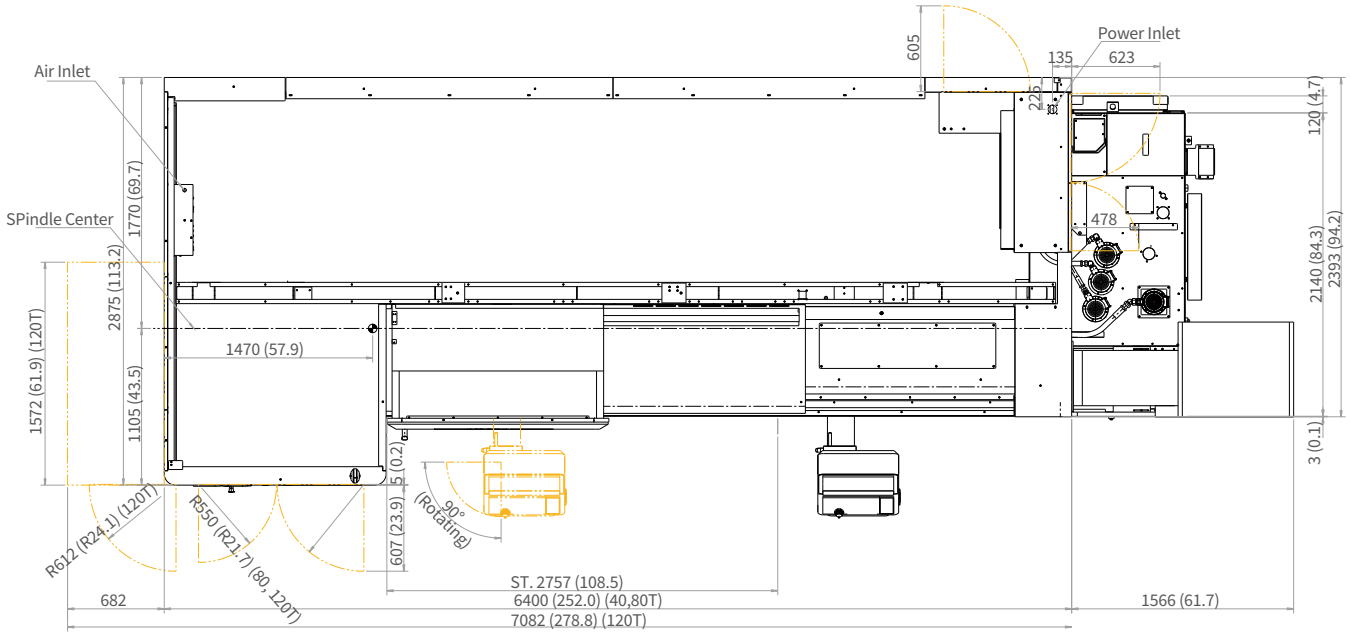

FRONT

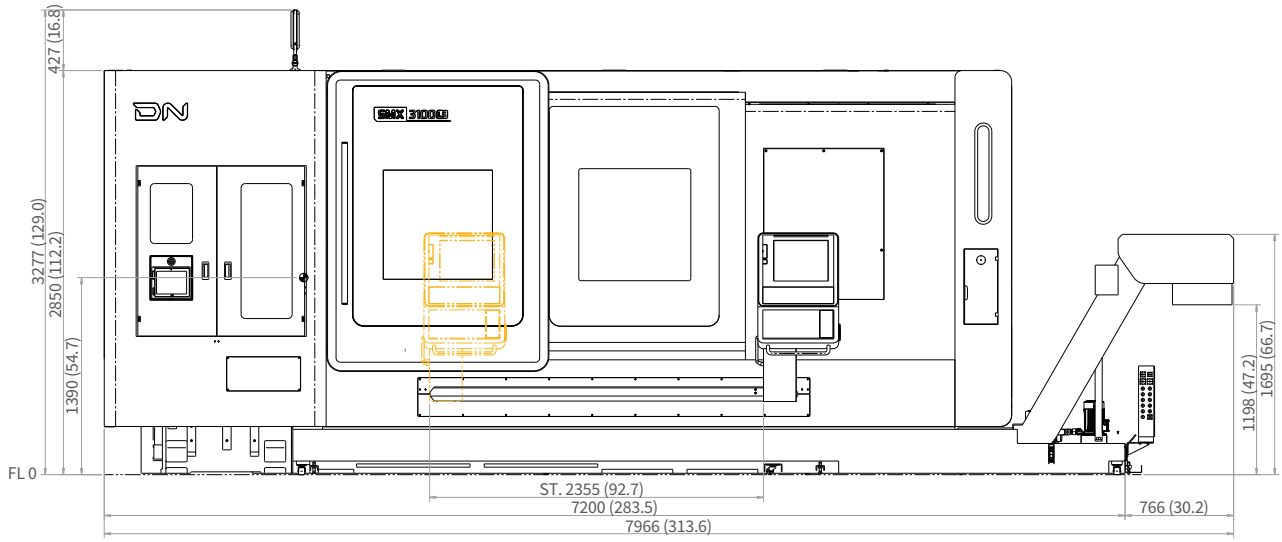

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time.
The anchor bolts and other related parts for foundation work are supplied as standard
items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.


** Some peripherals can be placed in different locations.*

EXTERNAL DIMENSIONS


SMX 2600ST · 3100ST

Unit : mm (inch)

TOP

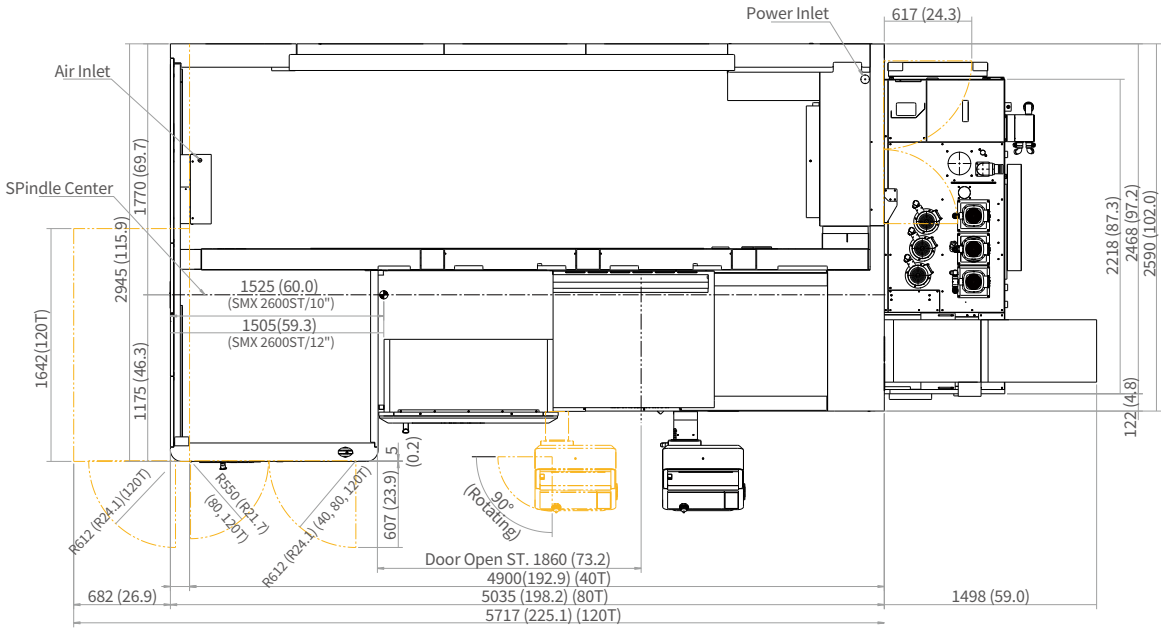

FRONT

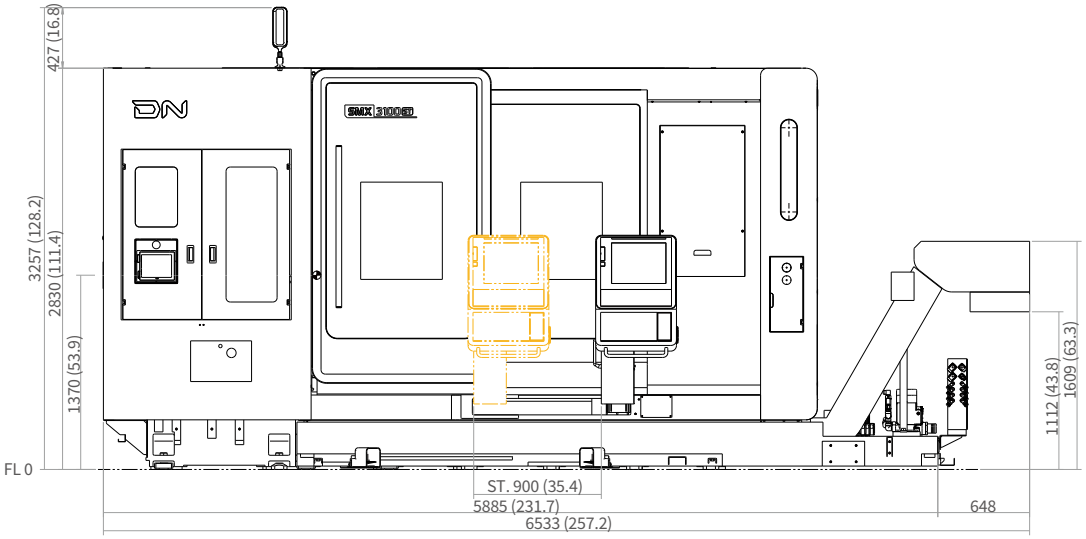

Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time.
The anchor bolts and other related parts for foundation work are supplied as standard
items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.


** Some peripherals can be placed in different locations.*

EXTERNAL DIMENSIONS


SMX 3100B/835

Unit : mm (inch)

TOP

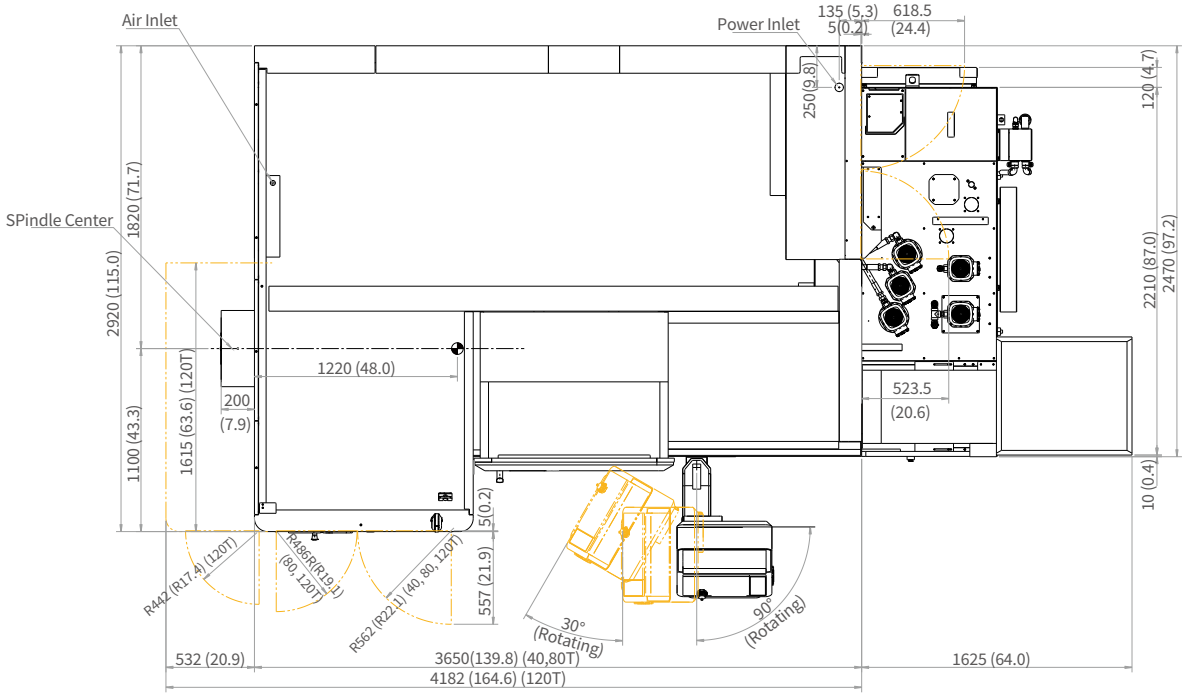

FRONT

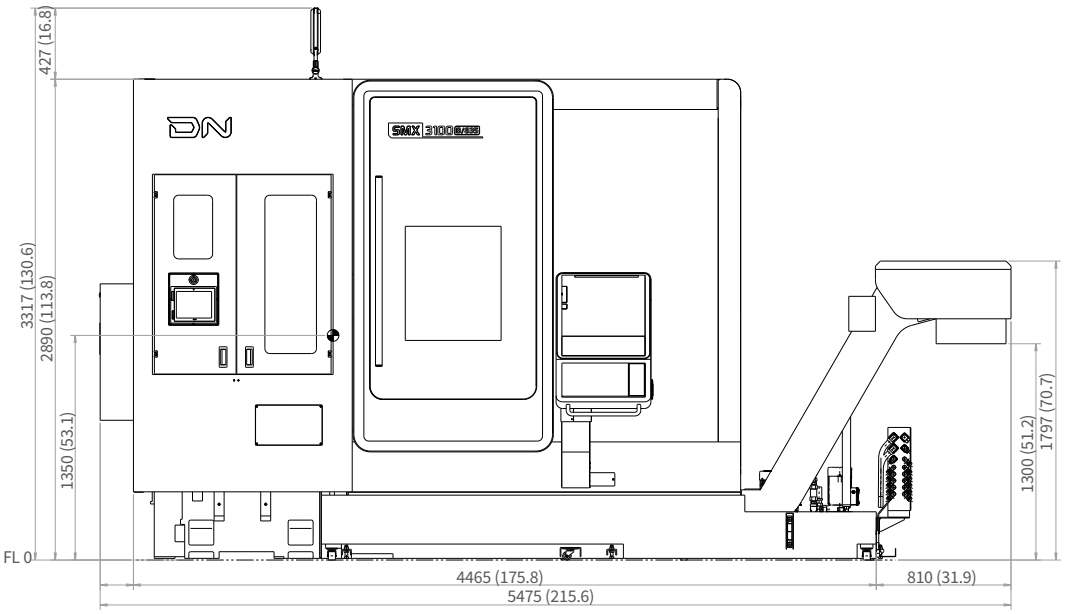


Machine foundation : Anchoring is recommended to maintain accuracy over a long period of time.
The anchor bolts and other related parts for foundation work are supplied as standard
items. Please consult with DN Solutions and sales technicians regarding ground and operating conditions.

** Some peripherals can be placed in different locations.*

TOOLING SYSTEM

SMX 2100ST/STB

Unit : mm (inch)

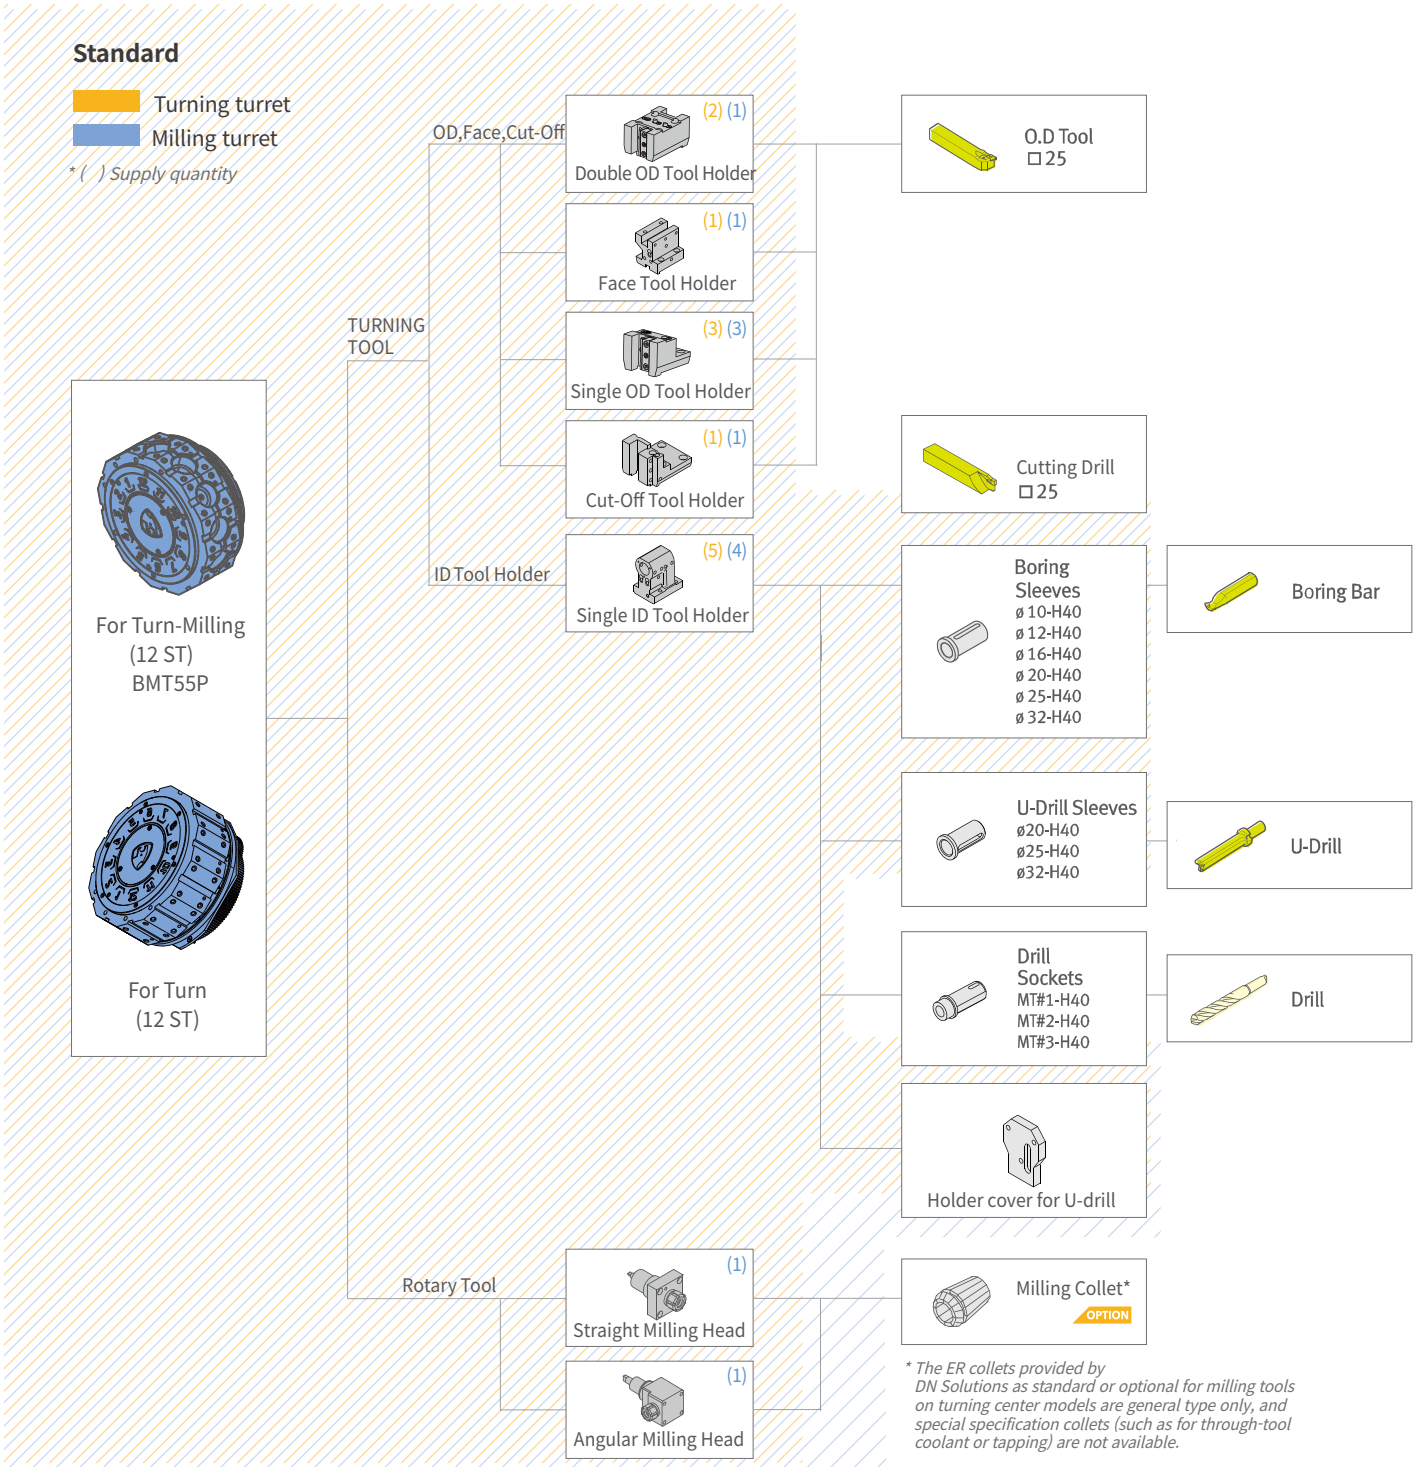

** The ER collets provided by DN Solutions as standard or optional for milling tools on turning center models are general type only, and special specification collets (such as for through-tool coolant or tapping) are not available.*

TOOLING SYSTEM

SMX 2100ST/STB

Unit : mm (inch)

Standard



For Turn-Milling
(24ST)
BMT55P

Turning Tool

OD,Face,Cut-Off

- (1) Double OD Tool Holder → O.D Tool □25
- (1) Double OD-Both Tool holder
- (1) Face Tool Holder
- (2) Single OD Tool Holder
- (1) Cut-Off Tool Holder → Cutting Drill □25

ID Tool Holder

- (3) Single ID Tool Holder → Boring Sleeves (Main) ø10-H32, ø12-H32, ø16-H32, ø20-H32, ø25-H32 → Boring Bar
- Boring Sleeves (Sub) ø10-H25, ø12-H25, ø16-H25, ø20-H25
- U-Drill Sleeves ø20-H32, ø25-H32 → U-Drill
- Drill Sockets MT#1-H32, MT#2-H32, MT#3-H32 → Drill
- Holder cover for U-drill

Rotary Tool


- (1) Straight Milling Head → Milling Collet * OPTION
- (1) Angular Milling Head

** The ER collets provided by DN Solutions as standard or optional for milling tools on turning center models are general type only, and special specification collets (such as for through-tool coolant or tapping) are not available.*

TOOLING SYSTEM

SMX 2600ST · 3100ST

Unit : mm (inch)

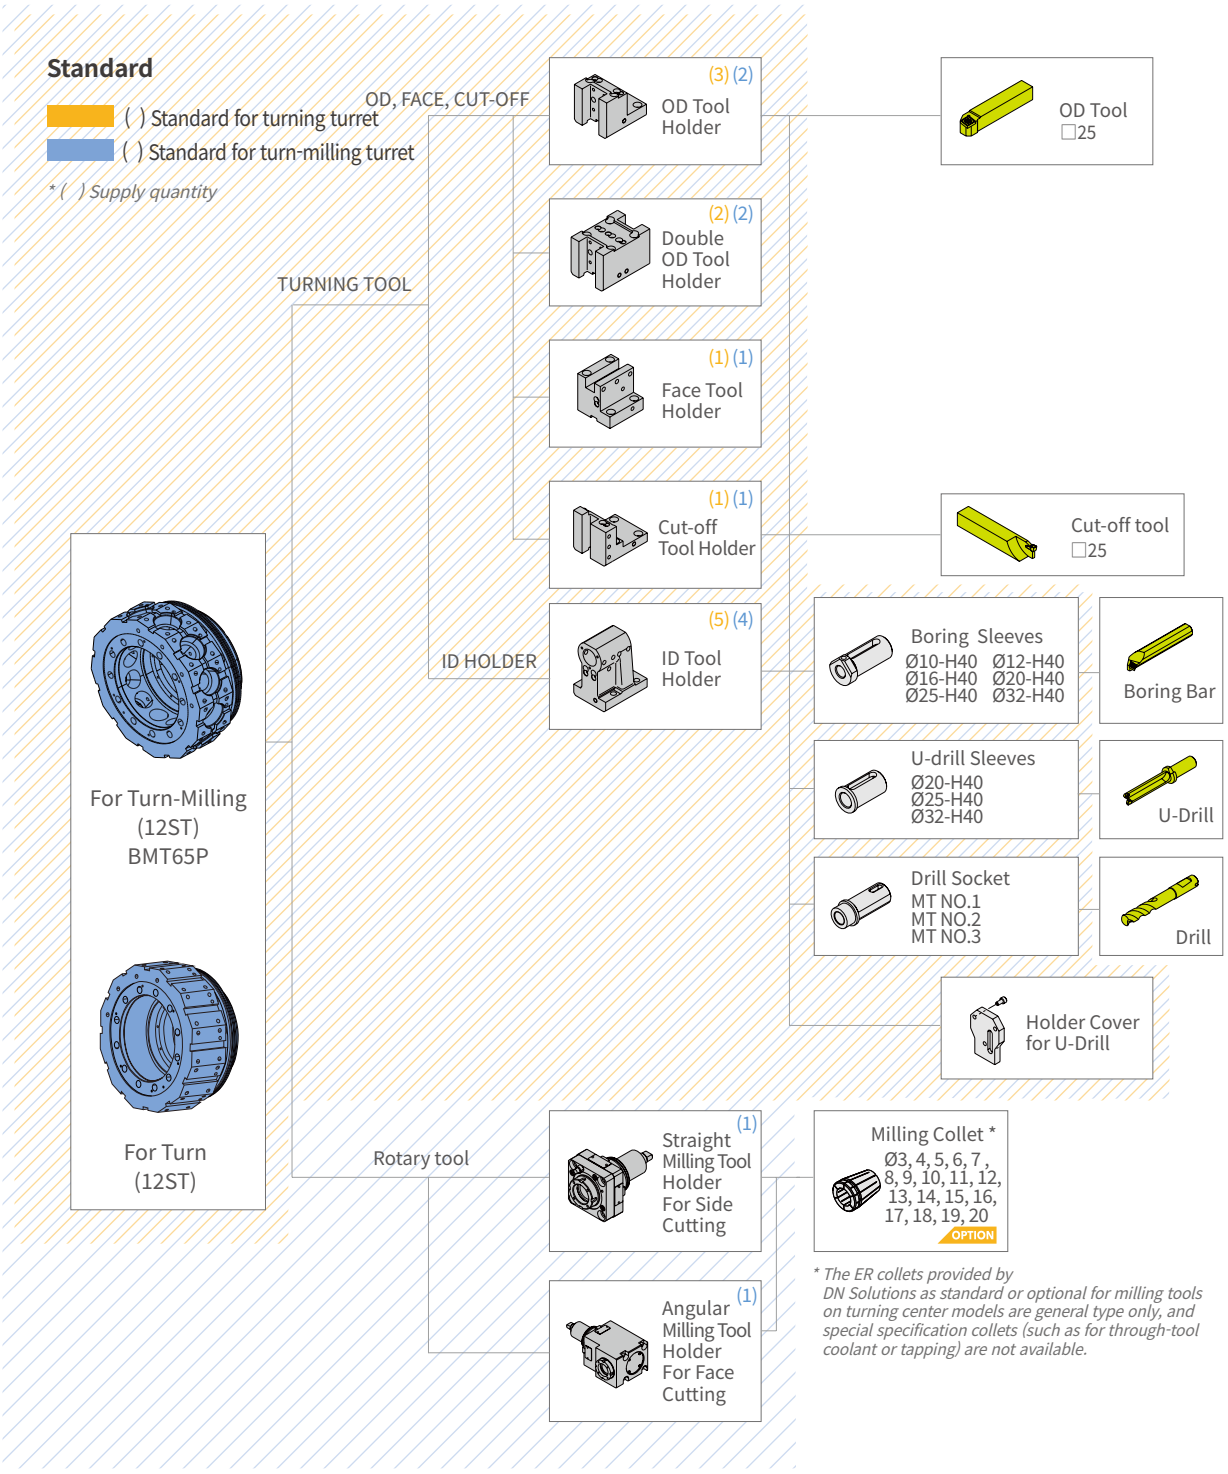


WORKING RANGE

SMX 2100/B/S/SB


Unit : mm (inch)

SMX 2100/B

ENTIRE RANGE

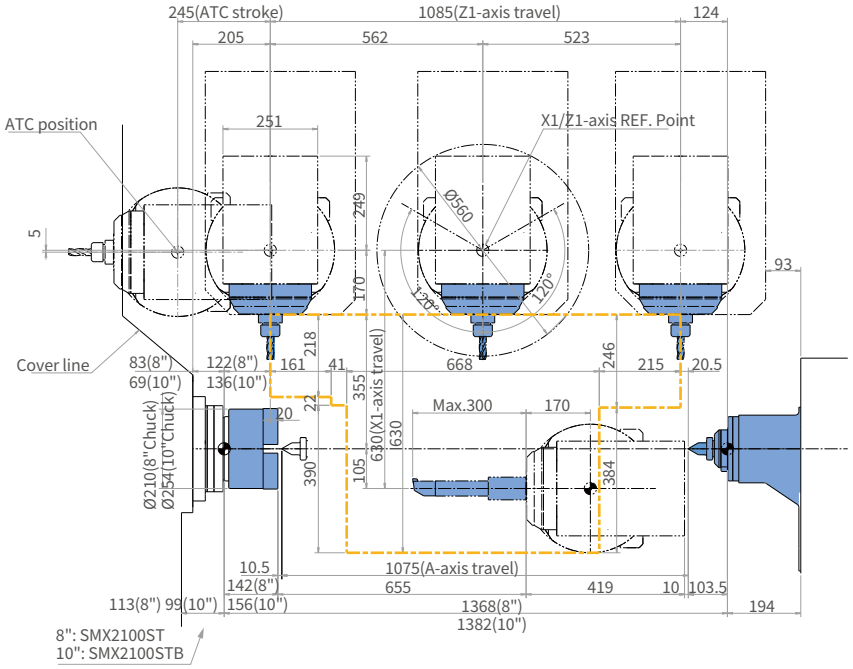


X1,Y-AXIS WORKING RAGE

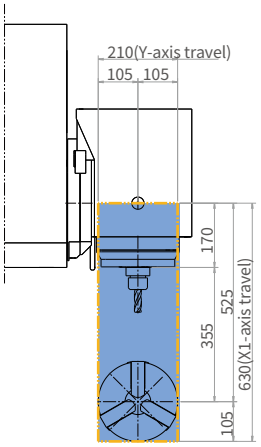


SMX 2100S/B

ENTIRE RANGE

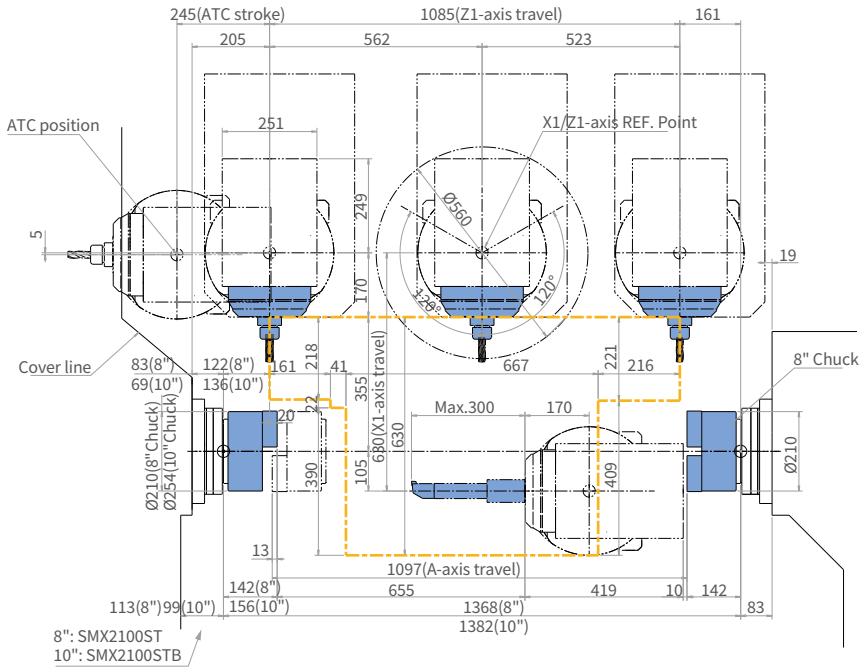

X1,Y-AXIS WORKING RAGE

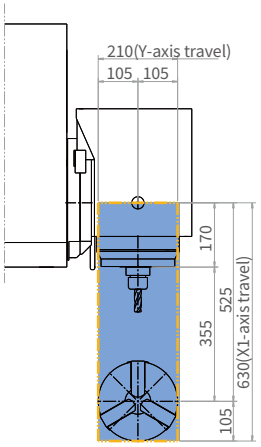


WORKING RANGE


SMX 2100ST/STB

Unit : mm (inch)


ENTIRE RANGE

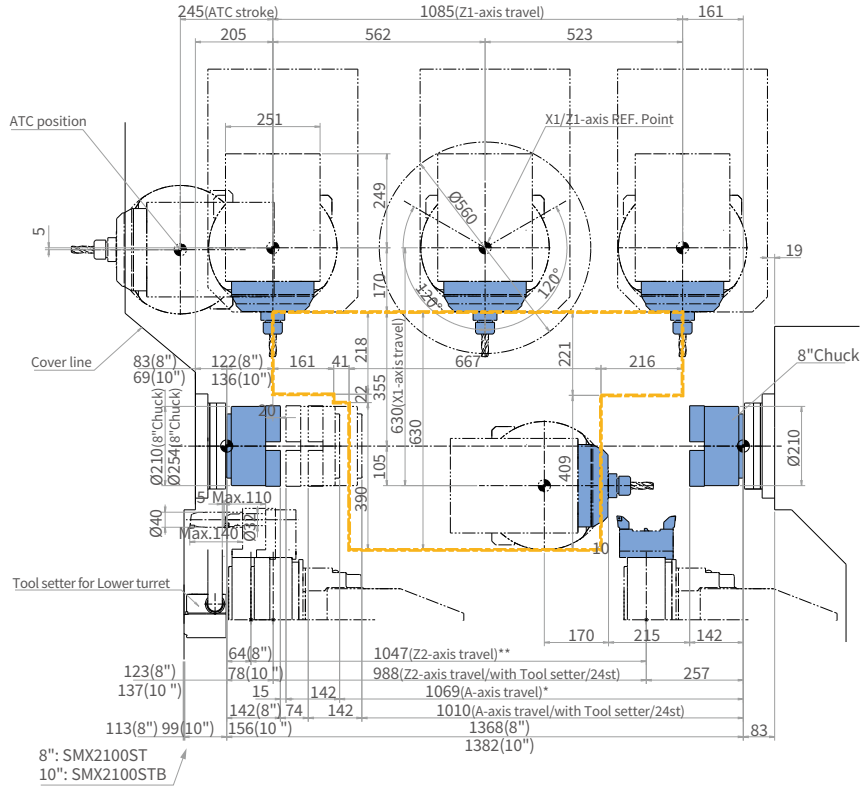

X1,Y,X2 -AXIS WORKING RAGE

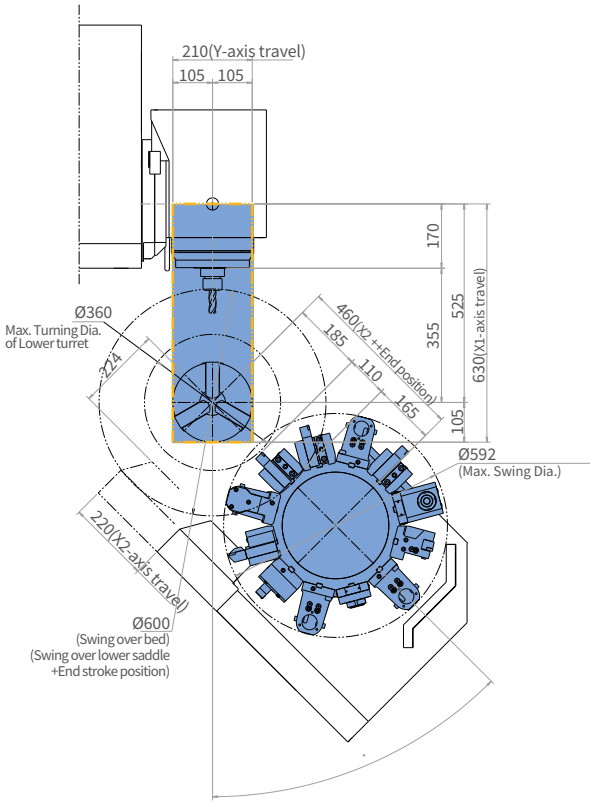

B-AXIS ROTATING RANGE

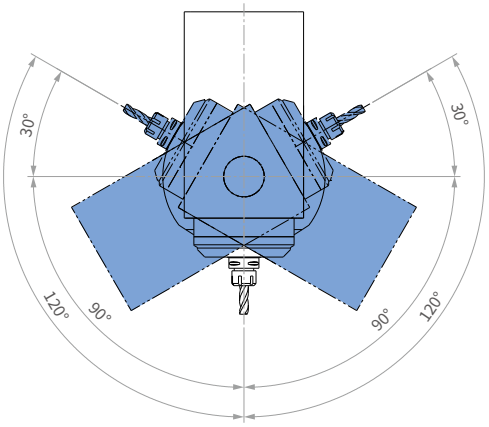


WORKING RANGE

SMX 2100L/LS


Unit : mm (inch)

SMX 2100L

ENTIRE RANGE

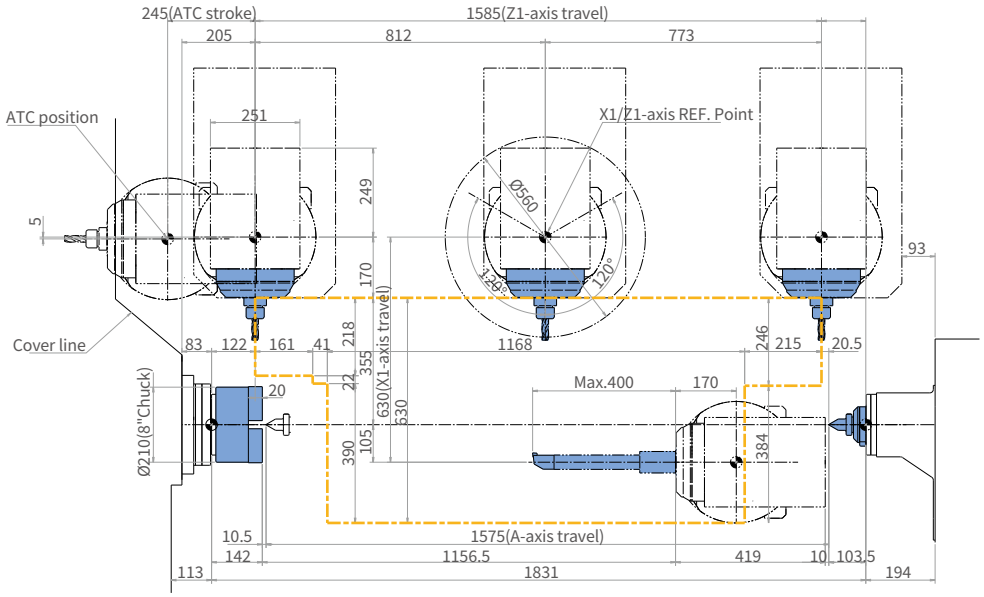


X1,Y-AXIS WORKING RAGE

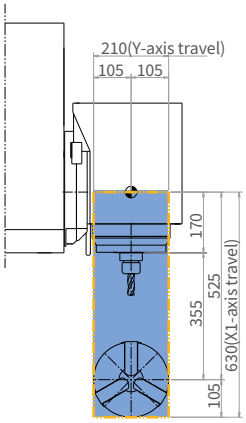


SMX 2100LS

ENTIRE RANGE

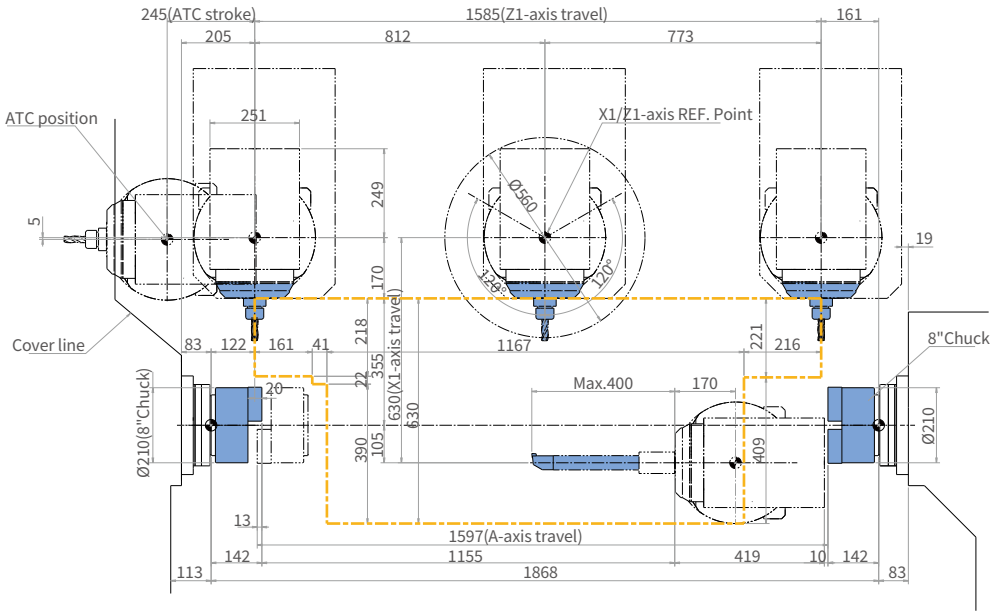

X1,Y-AXIS WORKING RAGE

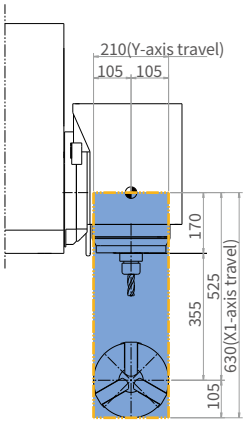


WORKING RANGE

SMX 2100LST · 3100B/835


Unit : mm (inch)

SMX 2100LST

ENTIRE RANGE

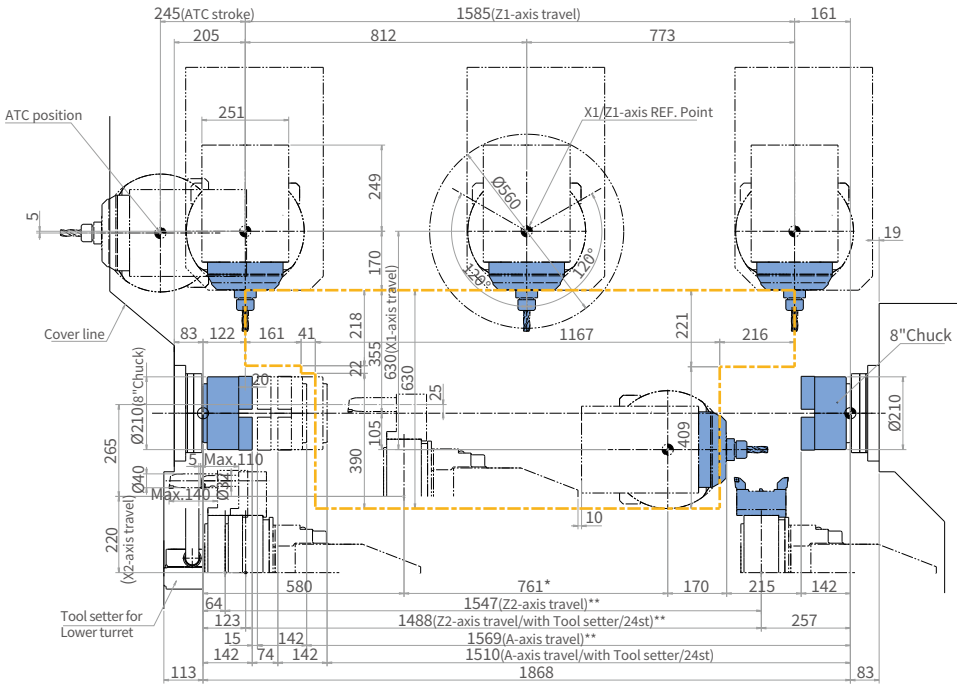

X1,Y,X2 AXIS WORKING RAGE

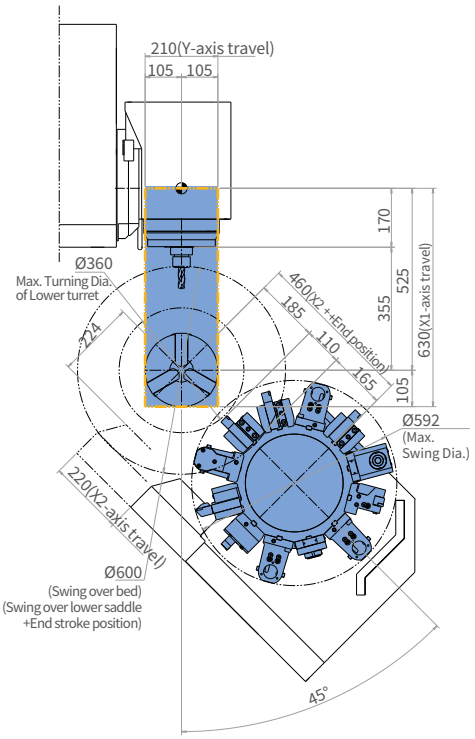


		Minimum distance between L/R chuck	Z2-axis Travel	A-axis Travel	Max. ID tool length
Without tool setter or With removable tool setter	**12st****	37 (1.5)	1547 (60.9)	1569 (61.8)	140(Ø40)
	24st**	37 (1.5)	1547(60.9)	1569 (61.8)	110(Ø32)
Without tool setter	**12st****	37 (1.5)	1547(60.9)	1569 (61.8)	140(Ø40)
	24st**	96 (3.8)	1488 (58.6)	1610 (63.4)	110(Ø32)


** Minium distance between milling spindle and lower turret when both units art located on the respective end point of minus stroke.*

SMX 3100B/835

ENTIRE RANGE

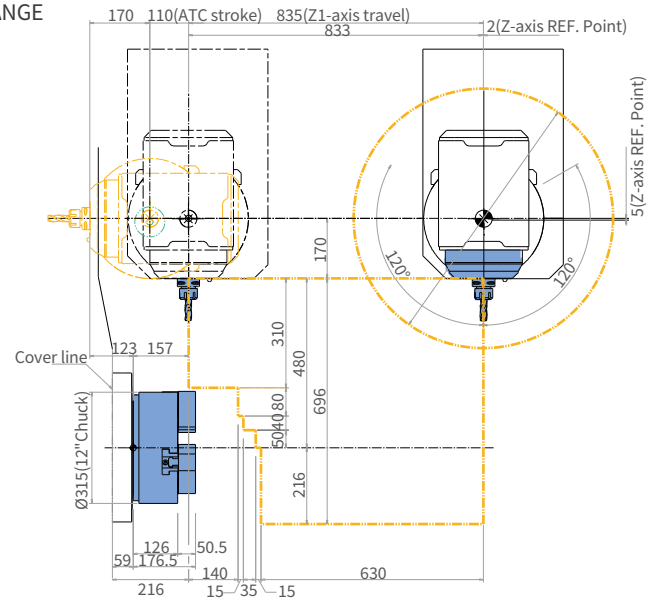

X1,Y-AXIS WORKING RAGE

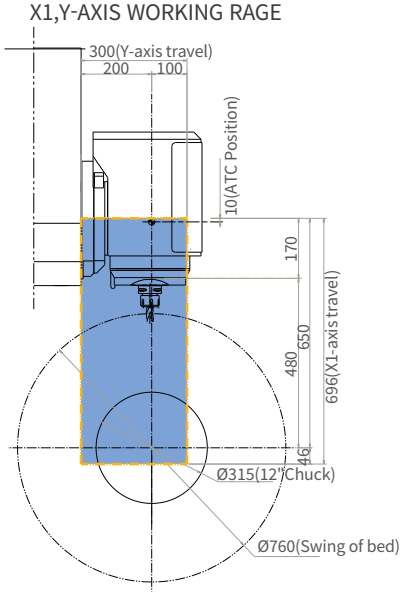


WORKING RANGE

SMX 2600 · 3100/L

Unit : mm (inch)


ENTIRE RANGE

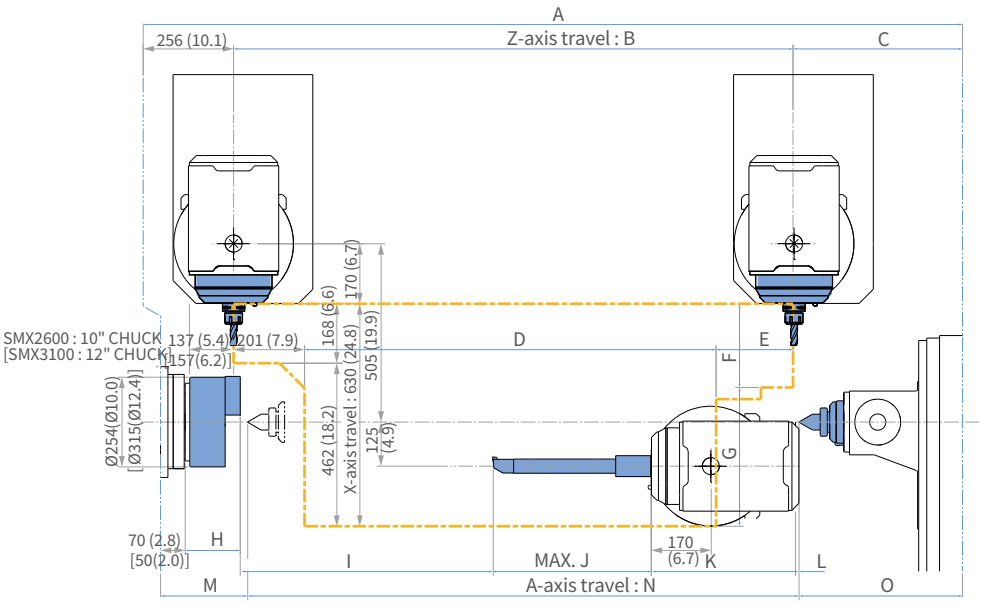


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
SMX 2600	2321 (91.4)	1585 (62.4)	480 (18.9)	1166 (45.9)	218 (8.6)	237 (9.3)	345 (13.6)	156 (6.1)	697 (27.4)	450 (17.7)	420 (16.5)	16 (0.6)	247 (9.7)	1866 (73.5)	463 (18.2)
SMX 3100								176 (6.93)							
SMX 3100L	3223 (126.9)	2585 (101.8)	382 (15)	2168 (85.4)	216 (8.5)	195 (7.7)	435 (17.1)	176 (6.93)	1705 (71.1)	450 (17.7)*	420 (16.5)	12 (0.5)	313 (12.3)	2500 (98.4)	361 (14.2)


** "I" and "J" can be different depends on an applied long tool.*

X1,Y-AXIS
WORKING RAGE

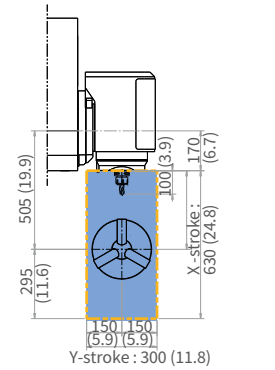



B-AXIS ROTATING RANGE

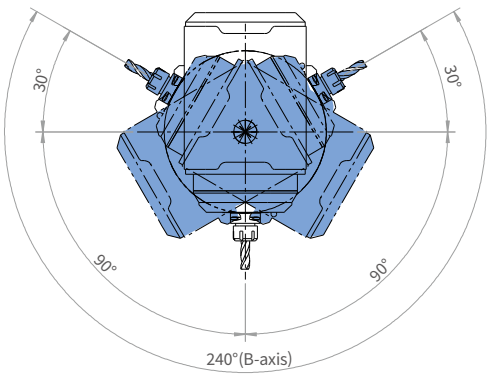


WORKING RANGE

SMX 2600S · 3100S/LS

Unit : mm (inch)


ENTIRE RANGE

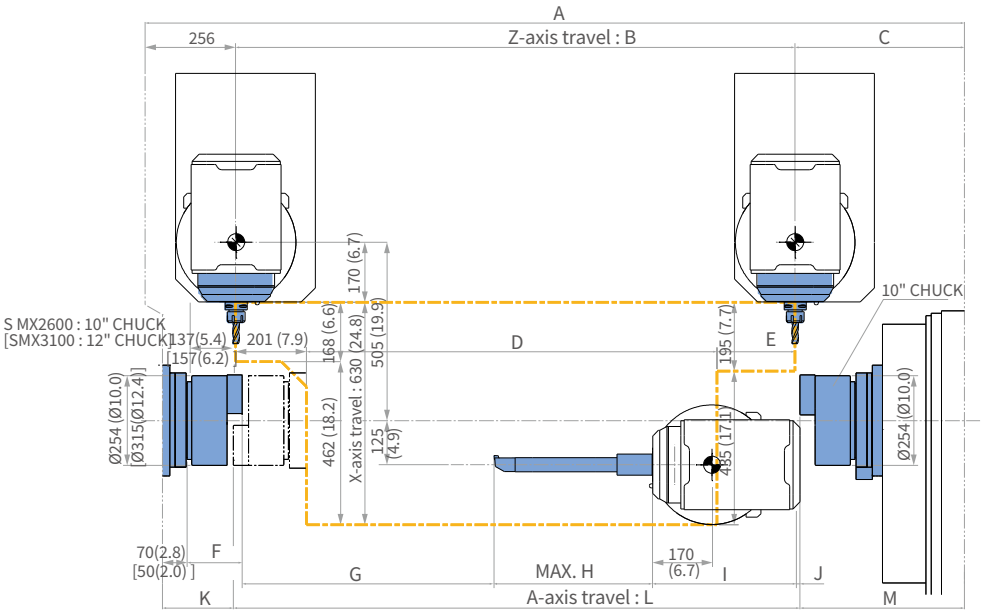


Model	A	B	C	D	E	F	G	H	I	J	K	L	M
SMX 2600S	2321 (91.4)	1585 (62.4)	480 (18.9)	1163 (45.8)	221 (8.7)	156 (6.1)	697 (27.4)	450 (17.7)	420 (16.5)	13 (0.5)	201 (7.9)	1605 (63.2)	466 (18.3)
SMX 3100S						176 (6.93)							
SMX 3100LS	3223 (126.9)	2585 (101.8)	382 (15)	2168 (85.4)	216 (8.5)	176 (6.93)	1705 (71.1)	450 (17.7)*	420 (16.5)	10 (0.4)	311 (12.2)	2500 (98.4)	363 (14.3)

** "G" and "H" can be different depends on an applied long tool.*

X1,Y-AXIS
WORKING RAGE

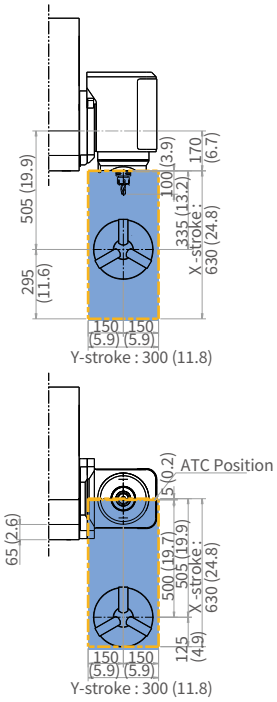

B-AXIS ROTATING RANGE

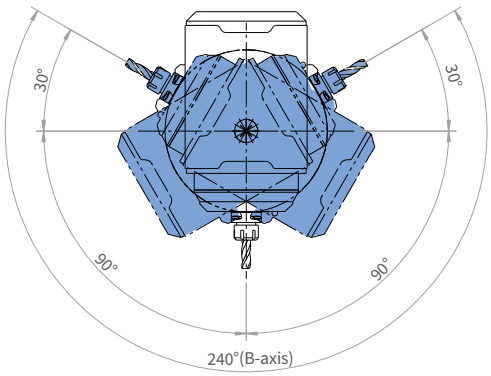


WORKING RANGE


SMX 2600ST ·3100ST

Unit : mm (inch)


ENTIRE RANGE

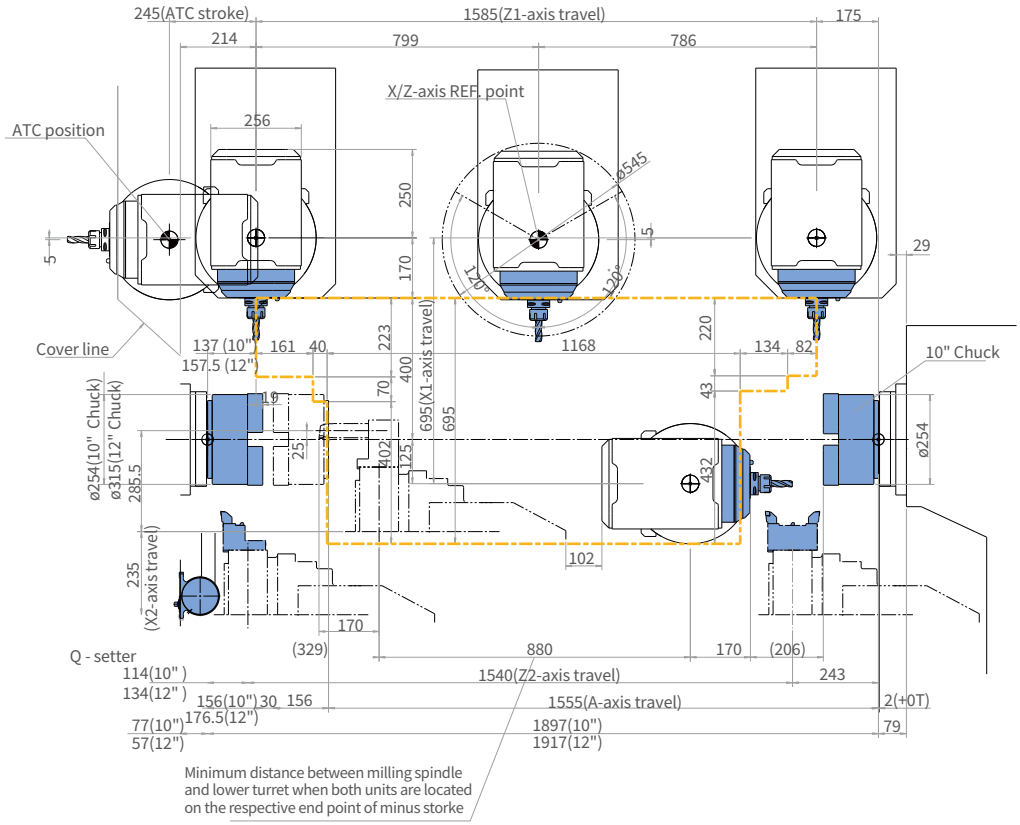

X1,Y,X2 AXIS WORKING RAGE

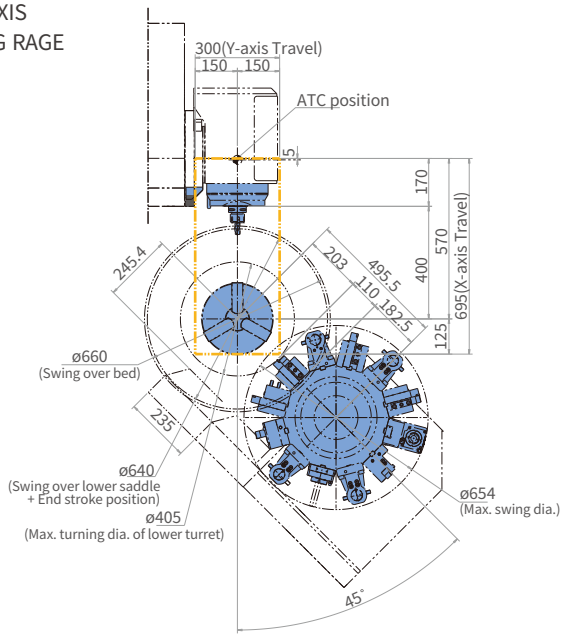

B-AXIS ROTATING RANGE

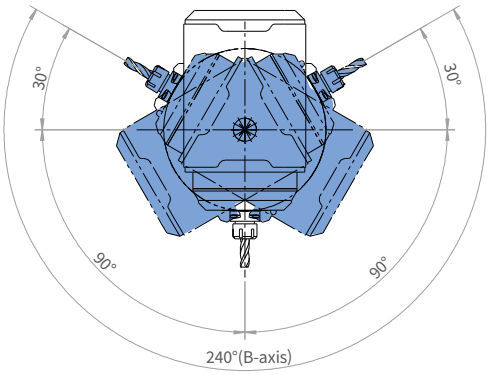


WORKING RANGE


SMX 2100ST/STB Lower turret

Unit : mm (inch)


ANGULAR MILLING HEAD

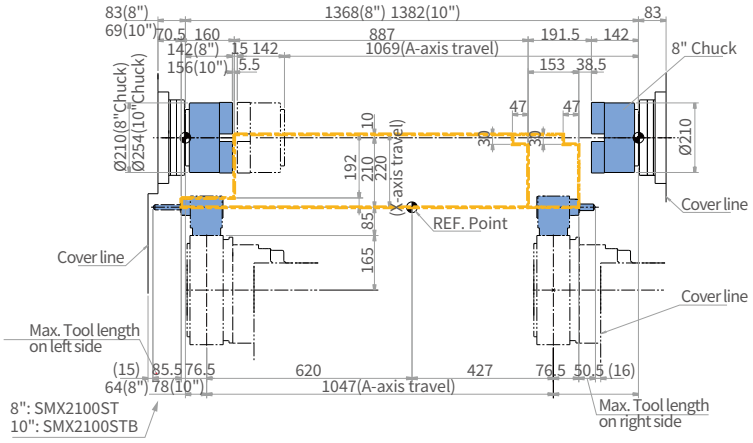


STRAIGHT MILLING HEAD

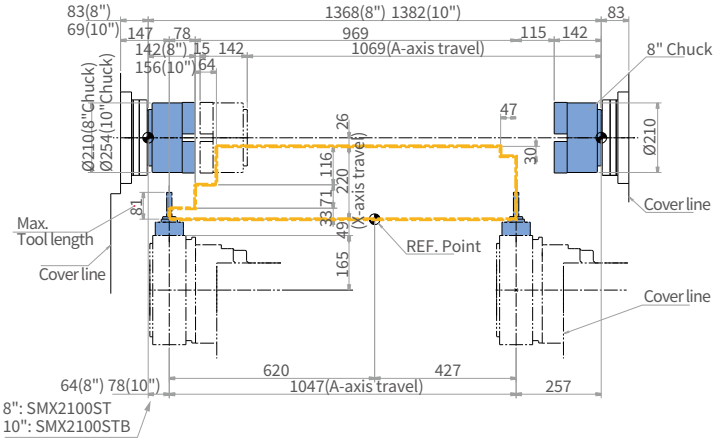

ID TOOL HOLDER

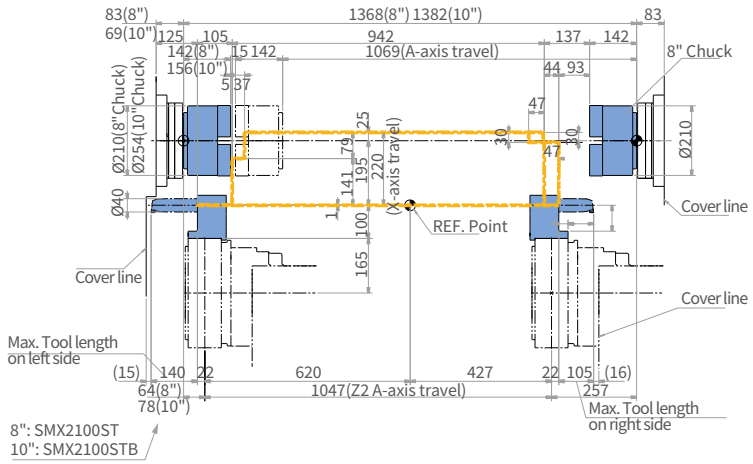

OD TOOL HOLDER

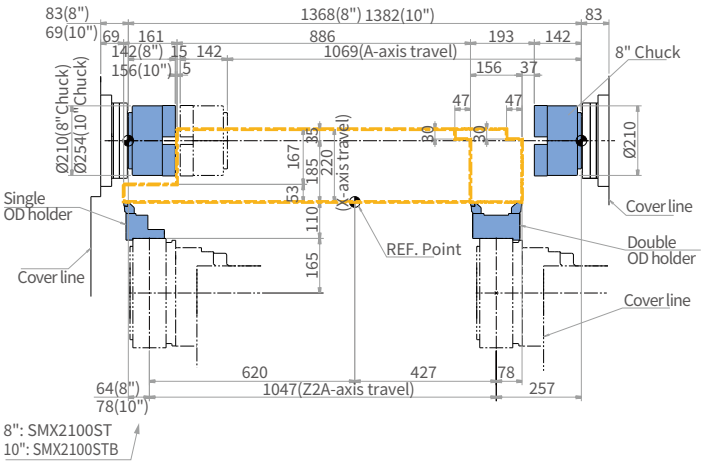


WORKING RANGE

SMX 2600ST ·3100ST Lower turret


Unit : mm (inch)

ANGULAR MILLING HEAD

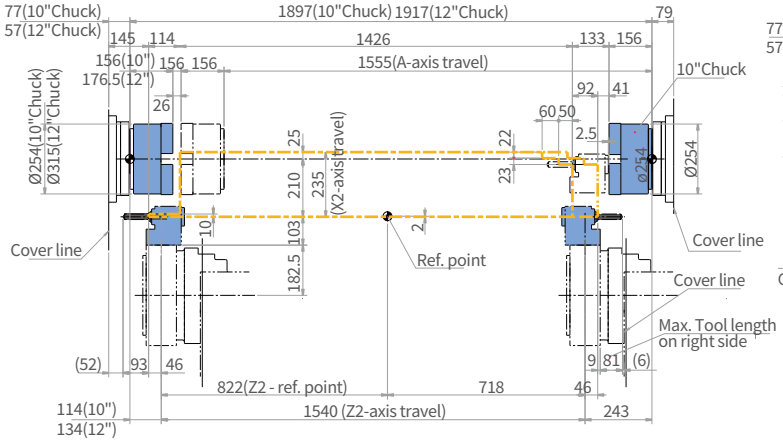


** Based on SMX 2600ST, SMX3100ST : 95mm (3.7inch)*

STRAIGHT MILLING TOOL HOLDER

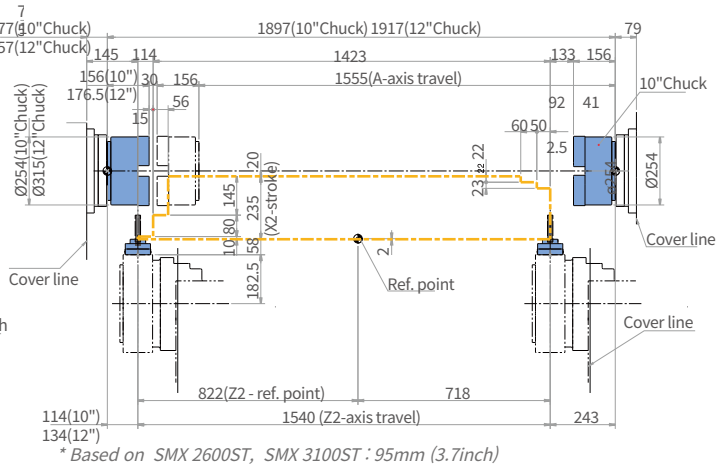


** Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)*

ID TOOL HOLDER

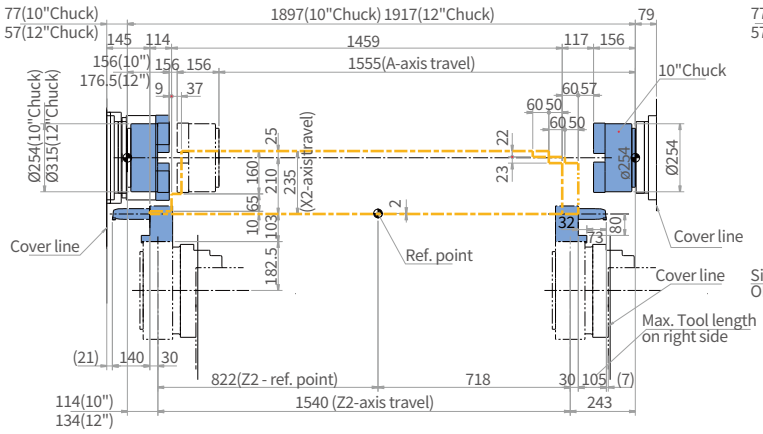

** Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)*

OD TOOL HOLDER

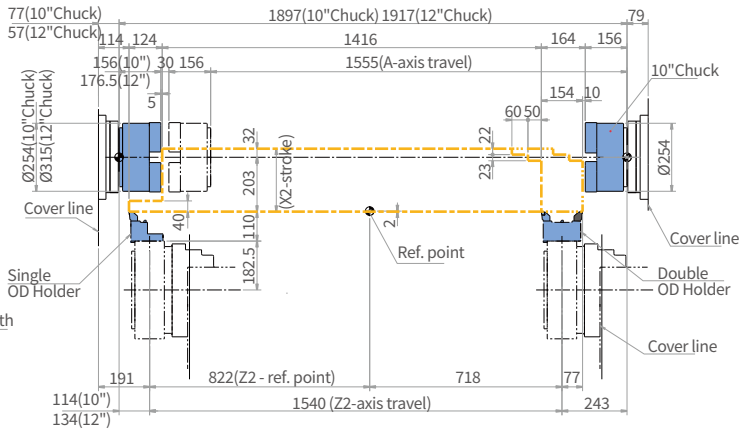

** Based on SMX 2600ST, SMX 3100ST : 95mm (3.7inch)*

Model	Unit	A	B	C	D	E
SMX 2600ST (10"chuck)	mm (inch)	ø254 (10.0)	156 (6.1)	1897 (74.7)	114 (4.5)	77 (3.0)
SMX 3100ST (12" chuck)	mm (inch)	ø315 (12.4)	176.5 (6.9)	1917 (75.5)	134 (5.3)	57 (2.2)

MACHINE SPECIFICATIONS

SMX 2100 series

Item			Unit	SMX 2100[L]	SMX 2100S[LS]	SMX 2100ST[LST]	SMX 2100B	SMX 2100SB	SMX 2100STB
Capacity	Swing over bed		mm (inch)	600 (23.6)					
	Recom. turning diameter		mm (inch)	210 (8.3)			255 (10.0)		
	Max. turning diameter *		mm (inch)	600 (23.6)					
	Max. turning length		mm (inch)	1040(40.9) [1540(60.6)]			1040 (40.9)		
	Chuck size	Left spindle	inch	8 {10}			10 {12}		
		Right spindle	inch	-	8 {10}		-	8 {10}	
	Chuck work weight (include chuck)		kg (lb)	150 (330.7)			260 (573.2)		
	Shaft work weight (include chuck)		kg (lb)	300 (661.4)	-		520 (1146.4)	-	
	Bar working diameter		mm (inch)	67 (2.6)			81 (3.2)		
Travels	Travel distance	X-axis	mm (inch)	630(-105/+525) (24.8(-4.1/+20.7))					
		Y-axis	mm (inch)	210(±105) (8.3(±4.1))					
		Z-axis	mm (inch)	1085(42.7) [1585(62.4)]			1085 (42.7)		
		A-axis **	mm (inch)	-	1069 (42.1)		-	1047 (41.2)	
		B-axis	deg	240(±120)					
		C1-axis / C2-axis	deg	360 / -	360 / 360		360 / -	360 / 360	
		X2-axis / Z2-axis	mm (inch)	- / -		220 / 1047 (8.7 / 41.2) [1547 (60.9)]	- / -		220 / 1047 (8.7 / 41.2)
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)					
		Y-axis	m/min (ipm)	36 (1417.3)					
		Z-axis	m/min (ipm)	48 (1889.8)					
		A-axis **	m/min (ipm)	-	30 (1181.1)		-	30 (1181.1)	
		B-axis	r/min	40					
		C1-axis / C2-axis	r/min	200 / -	200 / 200		200 / -	200 / 200	
		X2-axis / Z2-axis	m/min (ipm)	- / -		24 / 36 (944.9 / 1417.3)	- / -		24 / 36 (944.9 / 1417.3)
Left spindle	Max. spindle speed		r/min	5000			4000		
	Spindle motor power (S3 15%/S3 25%/30min/cont.)		kW (Hp)	22 / 22 / 18.5 / 15 (29.5 / 29.5 / 24.8 / 20.1)			22 / 22 / 22 / 15 (29.5 / 29.5 / 29.5 / 20.1)		
	Spindle nose		ASA	A2-6			A2-8		
	Spindle bearing diameter (Front)		mm (inch)	110 (4.3)			130 (5.1)		
	Spindle through hole		mm (inch)	76 (3.0)			91 (3.6)		
	Min. spindle indexing angle (C1-axis)		deg	0.0001					
Right spindle	Max. spindle speed		r/min	-	5000		-	5000	
	Spindle motor power (S3 25%/cont.)		kW	-	22 / 22 / 18.5 / 15		-	22 / 22 / 18.5 / 15	
	Spindle nose		ASA	-	A2-6		-	A2-6	
	Spindle bearing diameter (Front)		mm	-	110 (4.3)		-	110 (4.3)	
	Spindle through hole		mm	-	76 (3.0)		-	76 (3.0)	
	Min. spindle indexing angle (C2-axis)		deg	-	0.001{0.0001}		-	0.001{0.0001}	
Milling spindle	Max. spindle speed		r/min	12000 {20000 : F31i plus, F31i-5 plus, CUFOS}					
	Milling spindle motor power (S3 15%/S3 25%/30min/cont.)		kW	22 / 22 / 18.5 / 15 (29.5 / 29.5 / 24.8 / 20.1)					
	Min. spindle indexing angle (B-axis)		deg.	0.0001					
Automatic tool changer	Tool storage capa. (Max.)		ea	40 {80,120}					
	Tool shank		-	CAPTO C6 {HSK-T63}					
	Max. tool diameter continous		mm (inch)	90 (3.5)					
	Max. tool diameter without adjacent tools		mm (inch)	130 (5.1)					
	Max. tool length		mm (inch)	300 (11.8)					
	Max. tool weight		kg (lb)	12 (26.5)					
	Max. tool moment		N·m (ft-lbs)	9.8 (7.2)					
	Tool change time (T-T-T)	Tool-to-tool	sec	1.8 (Fanuc) / 1.8 (SIEMENS)					
		Chip-to-chip	sec	7.8 (Fanuc) / 12.2 (SIEMENS)					
Lower turret	No. of tool stations		ea	-		12{24 position index}	-		12{24 position index}
	OD tool size		mm (inch)	-		25 (1.0)	-		25 (1.0)
	Max. boring bar size		mm (inch)	-		Ø40 (Ø1.6)	-		Ø40 (Ø1.6)
	Turret Indexing time (1 station swivel)		s	-		0.2	-		0.2
	Max. rotary tool speed		r/min	-		{5000, 10000}	-		{5000, 10000}
Tail stock	Quill bore taper		MT	#4	-		#4	-	
	Quill travel		mm (inch)	1075 (42.3) [1575 (62.0)]	-		1075 (42.3)	-	
Coolant	Coolant pump motor power		kW (Hp)	1.1					
Power source	Electric power supply (rated capacity)		kVA	55.65	73.81	80.19	52.36	70.52	76.9
Machine dimensions	Height		mm (inch)	2777 (109.3)					
	Length		mm (inch)	3950 (155.5) [4735(186.4)] (without coolant tank) 4845 (190.7) [5630 (221.7)] (with coolant tank)			3950 (155.5) (without coolant tank) 4845(190.7) (with coolant tank)		
	Width		mm (inch)	2770 (109.1)					
	Weight		kg (lb)	14900 (32848.4)	15200 (33509.8)	15800 (34832.5)	15000 (33068.9)	15300 (33730.2)	15900 (35053.0)
Control	NC system			CUFOS-FANUC 31i-B Plus {CUFOS-FANUC 31i-B5 Plus / SINUMERIK ONE}					

** When the Tool Setter option is applied, the maximum machining diameter may change. Prior technical consultation is strictly required.*

*** A-axis is travel of servo tail stock in SMX 2100[L], 2100B and travel of right spindle in SMX 2100S[LS], 2100ST[LST], 2100SB, 2100STB.*

{ } : Optimal

MACHINE SPECIFICATIONS

SMX 2600 series

Item			Unit	SMX 2600	SMX 2600S	SMX 2600ST
Capacity	Swing over bed		mm (inch)	660 (26.0)		660 (26.0)
	Recom. turning diameter		mm (inch)	255 (10.0)		
	Max. turning diameter *		mm (inch)	660 (26.0)		660 (26.0) [Lower turret : 405 (15.9)]
	Max. turning length		mm (inch)	1540 (60.6)		
	Chuck size	Left spindle	inch	10 {12}		
		Right spindle	inch	-	10 {12}	
	Chuck work weight (include chuck)		kg (lb)	260 (573.2)		
	Shaft work weight (include chuck)		kg (lb)	520 (1146.4)	-	-
	Bar working diameter		mm (inch)	81 (3.2)		
Travels	Travel distance	X-axis	mm (inch)	630 (-125/+505) (24.8 (-4.9/+19.9))		695(-125/+570) (27.4(-4.9/+22.4))
		Y-axis	mm (inch)	300 (±150) (11.8 (±5.9))		
		Z-axis	mm (inch)	1585 (62.4)		
		A-axis **	mm (inch)	1562 (61.5)	1605 (63.2)	1555 (61.2)
		B-axis	deg	240 (±120)		
		C1-axis / C2-axis	deg	360 / 360		
		X2-axis / Z2-axis	mm (inch)	-	-	235 / 1540 (9.3 / 60.6)
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)		
		Y-axis	m/min (ipm)	36 (1417.3)		
		Z-axis	m/min (ipm)	48 (1889.8)		
		A-axis **	m/min (ipm)	-	30 (1181.1)	
		B-axis	r/min	40		
		C1-axis / C2-axis	r/min	200 / 200		
		X2-axis / Z2-axis	m/min (ipm)	-	-	24 / 36 (944.9 / 1417.3)
Left spindle	Max. spindle speed		r/min	4000		
	Spindle motor power (S3 25% / S2 30min /S1 Cont.)		kW (Hp)	30/26/22 (40.2/34./29.5)		
	Spindle nose		ASA	A2-8		
	Spindle bearing diameter (Front)		mm (inch)	130 (5.1)		
	Spindle through hole		mm (inch)	91 (3.6)		
	Min. spindle indexing angle (C1-axis)		deg	0.0001		
Right spindle	Max. spindle speed		r/min	-	4000	
	Spindle motor power (S3 25% / S2 30min /S1 Cont.)		kW (Hp)	-	30/26/22 (40.2/34./29.5)	
	Spindle nose		ASA	-	A2-8	
	Spindle bearing diameter (Front)		mm (inch)	-	130 (5.1)	
	Spindle through hole		mm (inch)	-	91 (3.6)	
	Min. spindle indexing angle (C2-axis)		deg	-	0.001	
Milling spindle	Max. spindle speed		r/min	12000		
	Milling spindle motor power (S6 25% / S2 30min /S1 Cont.)		kW (Hp)	22/18.5/15 (29.5/24.8/20.1)		
	Min. spindle indexing angle (B-axis)		deg	0.0001		
Automatic tool changer	Tool storage capa. (Max.)		ea	40 {80/120}		
	Tool shank		-	CAPTO C6 {HSK-T63}		
	Max. tool diameter continous		mm (inch)	90 (3.5)		
	Max. tool diameter without adjacent tools		mm (inch)	130 (5.1)		
	Max. tool length		mm (inch)	450 (17.7)		
	Max. tool weight		kg (lb)	12 (26.5)		
	Max. tool moment		N·m (ft-lbs)	9.8 (7.2)		
	Tool change time (T-T-T)	Tool-to-tool	sec	1.8 (Fanuc) / 1.8 (SIEMENS)		
		Chip-to-chip	sec	7.8 (Fanuc) / 12.2 (SIEMENS)		
Lower turret	No. of tool stations		ea	-		12
	OD tool size		mm (inch)	-		25 (1.0)
	Max. boring bar size		mm (inch)	-		40 (1.6)
	Turret Indexing time (1 station swivel)		s	-		0.2
	Max. rotary tool speed		r/min	-		5000
Long tool magazine	Tool storage capacity (Max.)		ea	-		-
	Max. tool size		mm (inch)	-		-
	Max. tool weight		kg (lb)	-		-
Tail stock	Quill bore taper		MT	#5	-	-
	Quill travel		mm (inch)	1562 (61.5)	-	-
Coolant	Coolant pump motor power		kW (Hp)	2.2 (3.0)		
Power source	Electric power supply (rated capacity)		kVA	63.38	92.84	98.93
Machine dimensions	Height		mm (inch)	2750 (108.3)	2750 (108.3)	2820 (111.0)
	Length		mm (inch)	4900 (192.9)(without coolant tank), 5700 (224.4) (with coolant tank)		4900 (192.9)(without coolant tank), 5780(227.6) (with coolant tank)
	Width		mm (inch)	3011 (118.5)	3011 (118.5)	3021 (118.9)
	Weight		kg (lb)	15800 (34832.5)	16200 (35714.4)	18000 (39682.6)
Control	NC system			CUFOS-FANUC 31i-B Plus {CUFOS-FANUC 31i-B5 Plus / SINUMERIK ONE}		

** When the Tool Setter option is applied, the maximum machining diameter may change. Prior technical consultation is strictly required.* *{ } : Optimal*

*** A-axis is travel of servo tail stock in SMX 2600 and travel of right spindle in SMX 2600S, 2600ST.*

MACHINE SPECIFICATIONS

SMX 3100 series

Item			Unit	SMX 3100	SMX 3100S	SMX 3100ST	SMX 3100L	SMX 3100LS	SMX 3100B/835
Capacity	Swing over bed		mm (inch)	660 (26.0)					760 (29.9)
	Recom. turning diameter		mm (inch)	315 (12.4)					
	Max. turning diameter *		mm (inch)	660 (26.0)		660 (26.0) [Lower turret : 405 (15.9)]	660 (26.0)		760 (29.9)
	Max. turning length		mm (inch)	1540 (60.6)	1540 (60.6)		2540 (100.0)		790 (31.1)
	Chuck size	Left spindle	inch	12 {15}					
		Right spindle	inch	-	10 {12}		-	10 {12}	-
	Chuck work weight (include chuck)		kg (lb)	500 (1102.3)					500 (1102.3)
	Shaft work weight (include chuck)		kg (lb)	1000 (2204.6)	-	-	1000 (2204.6)	-	-
	Bar working diameter		mm (inch)	102 (4.0)					
Travels	Travel distance	X-axis	mm (inch)	630 (-125/+505) (24.8 (-4.9/+19.9))		695(-125/+570) (27.4(-4.9/+22.4))	630 (-125/+505) (24.8 (-4.9/+19.9))		696(-46/+650) (27.4(-1.8/+25.6))
		Y-axis	mm (inch)	300 (±150) (11.8 (±5.9))					300 (11.8)
		Z-axis	mm (inch)	1585 (62.4)			2585 (101.8)		835 (32.9)
		A-axis **	mm (inch)	1562 (61.5)	1605 (63.2)	1540 (60.6)	2500 (98.4)		-
		B-axis	deg	240 (±120)					
		C1-axis / C2-axis	deg	360 / 360					
		X2-axis / Z2-axis	mm (inch)	-	-	235 / 1540 (9.3 / 60.6)	-	-	-
	Rapid traverse rate	X-axis	m/min (ipm)	48 (1889.8)					
		Y-axis	m/min (ipm)	36 (1417.3)					
		Z-axis	m/min (ipm)	48 (1889.8)			30 (1181.1)	30 (1181.1)	48 (1889.8)
		A-axis **	m/min (ipm)	-	30 (1181.1)		-	20 (787.4)	-
		B-axis	r/min	40					
		C1-axis / C2-axis	r/min	200 / 200					
		X2-axis / Z2-axis	m/min (ipm)	-	-	24 / 36 (944.9 / 1417.3)	-	-	-
Left spindle	Max. spindle speed		r/min	3000					2400
	Spindle motor power (S2 30min/S1 Cont.)		kW (Hp)	30/25 (40.2/33.5)					
	Spindle nose		ASA	A2-11					
	Spindle bearing diameter (Front)		mm (inch)	160 (6.3)					180 (7.1)
	Spindle through hole		mm (inch)	115 (4.5)					120 (4.7)
	Min. spindle indexing angle (C1-axis)		deg	0.0001					
Right spindle	Max. spindle speed		r/min	-	4000				-
	Spindle motor power (S3 25% / S2 30min /S1 Cont.)		kW (Hp)	-	30/26/22 (40.2/34./29.5)				-
	Spindle nose		ASA	-	A2-8				-
	Spindle bearing diameter (Front)		mm (inch)	-	130 (5.1)				-
	Spindle through hole		mm (inch)	-	91 (3.6)				-
	Min. spindle indexing angle (C2-axis)		deg	-	0.001				-
Milling spindle	Max. spindle speed		r/min	12000					
	Milling spindle motor power (S6 25% / S2 30min /S1 Cont.)		kW (Hp)	22/18.5/15 (29.5/24.8/20.1)					
	Min. spindle indexing angle (B-axis)		deg	0.001					
Automatic tool changer	Tool storage capa. (Max.)		ea	40 {80/120}					
	Tool shank		-	CAPTO C6 {HSK-T63}					
	Max. tool diameter continous		mm (inch)	90 (3.5)					
	Max. tool diameter without adjacent tools		mm (inch)	130 (5.1)					
	Max. tool length		mm (inch)	450 (17.7)					300 (11.8)
	Max. tool weight		kg (lb)	12 (26.5)					
	Max. tool moment		N·m (ft-lbs)	9.8 (7.2)					
	Tool change time (T-T-T)	Tool-to-tool	sec	1.8 (Fanuc) / 1.8 (SIEMENS)					
		Chip-to-chip	sec	7.8 (Fanuc) / 12.2 (SIEMENS)					
Lower turret	No. of tool stations		ea	-		12	-	-	-
	OD tool size		mm (inch)	-		25 (1.0)	-	-	-
	Max. boring bar size		mm (inch)	-		40 (1.6)	-	-	-
	Turret Indexing time (1 station swivel)		s	-		0.2	-	-	-
	Max. rotary tool speed		r/min	-		5000	-	-	-
Long tool magazine (option for SMX 3100L/LS)	Tool storage capacity (Max.)		ea	-	-		{3}	{3}	-
	Max. tool size		mm (inch)	-	-		{Ø60 x L600 or Ø30 x L800 (Ø2.4 x L23.6 or Ø1.2 x L31.5)	{Ø60 x L600 or Ø30 x L800 (Ø2.4 x L23.6 or Ø1.2 x L31.5)}	-
	Max. tool weight		kg (lb)	-	-		{15}	{15}*	-
Tail Stock	Quill bore taper		MT	#5	-	-	#5	-	-
	Quill travel		mm (inch)	1562 (61.5)	-	-	2500 (98.4)	-	-
Coolant	Coolant pump motor power		kW (Hp)	2.2 (3.0)					1.1
Power source	Electric power supply (rated capacity)		kVA	70.08	99.44	99.46	69.80	99.72	60.44
Machine dimensions	Height		mm (inch)	2750 (108.3)	2850 (112.2)	2820 (111.0)	2850 (112.2)	2850 (112.2)	2890 (113.8)
	Length		mm (inch)	4900 (192.9) (without coolant tank), 5700 (224.4) (with coolant tank)	4900 (192.9) (without coolant tank), 5700 (224.4) (with coolant tank)	4900 (192.9) (without coolant tank), 5780(227.6) (with coolant tank)	6400 (252.0) (without coolant tank), 7200(283.5) (with coolant tank)	6400 (252.0) (without coolant tank), 7200(283.5) (with coolant tank)	4665 (183.7)
	Width		mm (inch)	3011 (118.5)	3011 (118.5)	3021 (118.9)	3011 (118.5)	3011 (118.5)	2920 (115.0)
	Weight		kg (lb)	16300 (35934.8)	16700 (36816.7)	18500 (40784.9)	20100 (44312.3)	20500 (45194.1)	14960 (32980.7)
Control	NC system			CUFOS-FANUC 31i-B Plus {CUFOS-FANUC 31i-B5 Plus / SINUMERIK ONE}					

** When the Tool Setter option is applied, the maximum machining diameter may change. Prior technical consultation is strictly required.*
*** A-axis is travel of servo tail stock in SMX 3100, 3100L and travel of right spindle in SMX 3100S, 3100ST, 3100LS.*

{ } : Optimal

DN SOLUTIONS

dn-solutions.com

Head Office

19F, 10, Tongil-ro, Jung-gu, Seoul, Republic of Korea, 04527

Tel: +82-2-6972-0370
Fax: +82-2-6972-0400

DN Solutions America

360 E State PKWY, Schaumburg, IL. 60173, United states

Tel: +1-315-265-7500

DN Solutions Europe

Emdener Strasse 24, D-41540 Dormagen, Germany

Tel: +49-2133-5067-100
Fax: +49-2133-5067-111

DN Solutions (India) Private Limited.

Plot No. 137, Devanahalli General Industrial Area (KIADB), ACIL, Kundana and Kasaba Area, Devanahalli, Bengaluru Rural – 562110. Karnataka, INDIA.

Email: info.india@dncompany.com

DN Solutions China

Room 101,201,301, Building 39 Xinzhuan Highway No.258 Songjiang District China Shanghai (201612)

Tel: +86 21-5445-1155
Fax: +86 21-6405-1472

DN Solutions Vietnam

M.O.R.E building 2F, 40A-40B Ut Tich Street, 04 Ward 04, District Tan Binh District, Ho Chi Minh City, Vietnam

Tel: +84 28-7304-0163

DN Solutions Mexico

Avenida Parque Bicentenario #100 Nave M65L3-6, Fraccionamiento San Isidro Business Park, Santa Rosa Jauregui, Querétaro, México

E-mail: efrain.figueroa@dncompany.com

Sales inquiry

sales@dncompany.com

** For more details, please contact DN Solutions.*
** Specifications and information contained within this catalogue may be changed without prior notice.*

ver. EN 260615 SU